

TELE

**3DTV
HDTV
IP/Web
satellite**

INTERNATIONAL

09-10₂₀₁₂



Test Report

GLOBALINVACOM

Ivan Horrocks Surprises With
Stacker Technology in
Fibre Optic System



Test Report

LEXIUM

Robby Dosetareh Helps Installers
With his Sophisticated New
Professional Meter



Company Report

DMS

Tim Heinrichs is
America's Busiest
Satellite Enthusiast



Company Report

TOPSIGNAL

Zongbao King Went From
Motors to Dishes and LNBs

Test Report

SPAUN

A Modulator to
Create Your Own
TV System

Test Report

DEVISER

An Amazing New
Top-notch
Handheld Meter



Test Report

AZBox miniMe



The BIG MINI Receiver

www.TELE-satellite.com

Over a decade of experience in digital set top boxes

we have models for worldwide market



HD DVB-S2 with CI MPEG-4/H.264

HDS-275SCI

- USB PVR and Timeshift Ready
- HD MPEG-4 DVB-S2 with CI slot
- Media playback: MP3, JPEG, AVI (Divx), MKV
- Up to 5000 channels
- HD output: 576i/720P/1080P
- 15 Days EPG (need program support)
- EUP

- DVB-T/T2 • DVB-C • ISDB-T • DVB-S2+DVB-T • HD DVB-T IP
- DVB-S/S2 • HD DVB-T+CONAX • ISDB-T+DVB-T • IP VOD BOX • Mobile Device



DVB-S FTA SDS-552ANP

- SD MPEG2 DVB-S FTA version
- USB PVR and time shift ready
- Media playback: OGG/JPEG/BMP/MPGE PS/MPEG4
- Up to 5000 channels
- Advanced Automatic and blind scan
- NIT Network Search compliant



DVB-T2 HDT-129N

- Full HD DVB-T2 compliant
- Media playback: MP3, WMA, FLAC, JPG, JPEG, MPG, MPEG, VOB, AVI, TS, TRP, M2T, M2TS, MP4, MKV, MOV, DIVX *
- Up to 5000 channels



HD IP Set Top Box IV210

- Online playback: 1Mbps ADSL supports smoothly, streaming DVD quality video/2Mbps ADSL for smoothly, streaming 720p quality video from bundled/Service or Content providers/TV live, VOD, download
- Content Access: Network open content source, Network specific content service
- Video decode: Full HD H.264, MPEG-1/2/4, DivX, WMV9, XviD, RMVB, FLV, MJPEG
- Audio decode: MP3, WAV, WMA, AAC-LC/HC, OGG Vorbis, RA, Dolby D
- Display resolution: 1080P
- WiFi 802.11(b/g/n): USB WiFi dongle, built-in USB WiFi module (Optional), SSID auto search, WEP/WPA encryption
- IP allocation: Static IP /DHCP/PPPOE



Android IP Set Top Box IV3010

- Android operate system media player
- Video Decoding: H.264(1080p/i HP@L4.1), MPEG1/2/4*1080p/i
- Video Output: NTSC, PAL, 720p, 1080p/i, HDMI/YPbPr/CVBS
- Audio Decoding: MP1/2/3, WMA, WAV, OGG, AAC, etc





**TELE-satellite
International**
The World's Largest
Digital TV Trade Magazine

since 1981

Alexander Wiese
Publisher

alex@TELE-satellite.com
HQ in Munich, Germany

Dear Readers,

More and more receivers operate with an Internet connection and offer users an enormous assortment of TV channels that are available via the worldwide Internet. It could be streaming channels such as with a regular TV broadcaster or video files that would first need to be downloaded. The choices are becoming more and more limitless. The selection of the transmission path is actually a way to limit these choices.

Of all the different technical variants, terrestrial TV transmissions in most regions offer the least amount of TV channels. A step up in the number of available channels would be cable TV and even better would be TV via satellite. But far larger are the number of TV channels that can be received via the Internet, but there's no way to actually confirm how many there really are. All too often one Web/IP-TV provider starts up service while another stops service making it difficult to count the number of channels.

If you take a closer look at the TV channels that you can receive with the different methods, an interesting picture begins to develop. With terrestrial TV the number of available channels might be small, but they'd mostly be channels that viewers would want to see. Not only that, these channels would naturally offer programming of local interest.

The channels available via cable TV fulfill similar criteria; they are also mostly channels liked by the viewers attached to the cable network. The plight of the cable TV viewer, that usually doesn't have any other way of receiving TV, is that they are typically exploited by the cable provider in that they fill up their channel space with far too many useless channels such as shopping channels.

The satellite viewer has the best selection but they often have to do without channels that deal with local news and events. The selection of channels is so large that choosing a channel to watch becomes a tiresome task. Even more gigantic is the choice with Web/IP-TV; here there's absolutely no organization at all.

On what criteria should you base your decision on? The list of channels that every receiver presents after a scan has become so

long that I easily lose the overview. And that's the problem: I should be able to choose a TV channel based on its name alone. But this is simply not enough information. There are many channels that have selected very peculiar names. How am I supposed to know, for example, that Press TV isn't a journalism channel but rather a news channel from Iran? And how many Tele5 and TV 5 channels are there that appear in a channel list after a scan? Which one should I choose?

As a user I think receivers should provide another bit of information for each channel that would help me make a decision. And that would be the picture quality which would be expressed in the bitrate. Ever since I've had an HD television, I've wanted to be able to use it exactly for that purpose, and that is to watch TV channels in high technical quality. For that reason my current criteria out of all the channels that are available is to search for only those channels that carry the two letters 'HD'. That reduces the choices significantly but it's not cut and dry. Quite a few SD channels also broadcast in good technical quality.

What's missing for me is an indication of the bitrate for each channel in the receiver's channel list. Then I would be able to sort the channels based on bitrate and would only surf between the first 100 channels. For those TV channels that don't put any value on the quality of their picture, I in return wouldn't put any value on those channels. Exceptions prove the rule.

So this is my wish for the scan function of a receiver: the bitrate should also be measured during a scan and sorting based on bitrate should also be possible. That's what I'd like to see.

Alexander Wiese
Editor-in-Chief TELE-satellite International



**TELE
satellite**

Address

TELE-satellite International, PO Box 1234, 85766 Munich-Ufg, GERMANY/EUROPE

Editor-in-Chief

Alexander Wiese, alex@TELE-satellite.com

Published by

TELE-satellite Medien GmbH, Aschheimer Weg 19, 85774 Unterfoehring, GERMANY/EUROPE

Design

Németi Barna Attila

Advertising

www.TELE-satellite.com/ads/

Hard Copy Subscription

www.tele-satellite.com/subscription/


Copyright © 2012 by TELE-satellite **ISSN** 1435-7003

TELE-satellite was established in 1981 and today is the oldest, largest and most-read digital tv trade magazine in the world. TELE-satellite is seen by more than 350,000 digital tv professionals around the world and is available both in printed form and online.

www.TELE-satellite.com

Hisilicon

Home network SoCs and Solutions

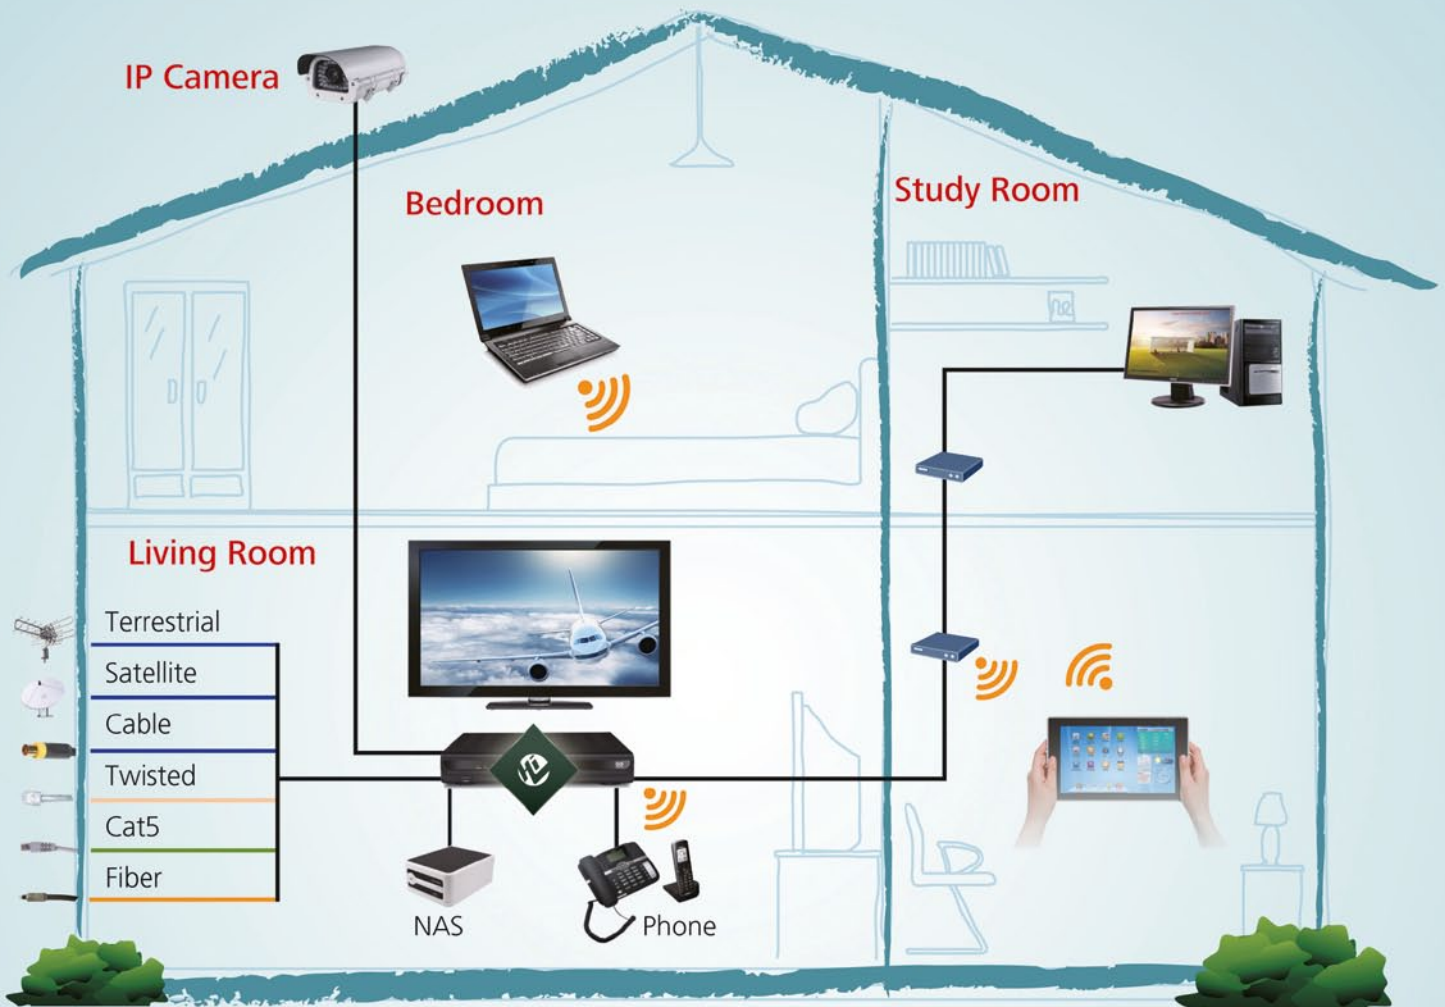

Hisilicon STB SoC Key Features

- High performance ARM Cortex A9 CPU
- Integrated with DVB-C or DVB-S/S2 Demodulator
- Hardware decoder supporting Full HD H.264/MPEG2/MPEG4/AVS/Real/VC-1/FLV/VP6/VP8
- Hardware encoder supporting H.264 SVGA
- High performance 2D and 3D engine
- Advanced security features
- Dual Ethernet, Dual USB 2.0, HDMI 1.4

Solution Features

- Low cost HD-STB solution with 3DTV
- Quick Boot-up, Low Power Consumption
- 3D Games, 3D UI
- Linux/Android 4.0
- Full-service PVR
- Video phone, VOIP
- DVB, IPTV, OTT, Hybrid STB
- Cloud computing, Thin Client solutions

FULAN

ONE BOX ONE DREAM



FuLan Electronics Ltd

litt@fulan-soft.com
www.fulansoft.com

3/F, A1 Block, Cyber-Tech Zone, Gaoxin AVE.7.S, Hi-Tech Industrial Park, Nanshan Dist., Shenzhen, China.

BREAKING NEWS!

Stay Tuned for Live Reports In This TELE-satellite Issue



09-10/2012

The World's Largest Digital TV Trade Magazine
since 1981
TELE 3DTV
HDTV
IP/Web
satellite
INTERNATIONAL

**All Reports in TELE-satellite are
Original and Exclusive!**

from Around the World!

We Report Directly From

Feature
Optical Fibres
Zielona Gora, Poland, Europe

Feature
Transmission Modes
Vienna, Austria, Europe

Test Report
DEVISER
Tianjin, China

Feature
SPARK
Vienna, Austria, Europe

Company Report
TOPSIGNAL
Ninghai, Zhejiang, China

Feature
CommunicAsia Exhibition
Singapore

Read TELE-satellite Magazine 09-10/2012
on Laptop, Tablet or Smartphone for FREE here:

www.TELE-satellite-global.com/eng/TELE-satellite-1209

TELE-satellite Magazine is Also Available in All Major Languages
Click Language Link on Main Website
www.TELE-satellite.com

Company Reports are written by TELE-satellite's editorial staff on location
Test Reports are written by TELE-satellite's engineering staff located at
different strategic reception points around the world



AZBOX MINIME
Miniature HDTV Linux Receiver with
Multimedia Features 16



**DEVISER
DS2400T**
Professional Meter
for DVB-T, DVB-C
and CATV 36



GLOBALIN VACOM
Loss-less Distribution for
Satellite Signals 54



**SPAUN
VAM 420
NG PAL**
High Quality Analogue Modulator 66



**LEXIUM
FASTALIGN 5110PRO**
Professional Digital
Satellite Meter 74

Feature:
The Wonderful World of Spark
Part 4: Web-TV 88

Feature:
AZBox ME Receiver Software
Part 3: Plugin Installation 98

AWARD Winning:
Digital Receivers of 21st Century 108

AWARD Winning:
HDTV PC Cards of 21st Century 118

AWARD Winning:
Signal Analyzers of 21st Century 122


AWARD Winning:
IPTV/WebTV Receivers
of 21st Century 134

Vitor's Workshop:
Selfmade Dish: Lego Antenna 140

Feature:
Wavelengths & Connector Types 150

Feature:
Special Transmission Modes 156

Digital Technology:
New Developments 166

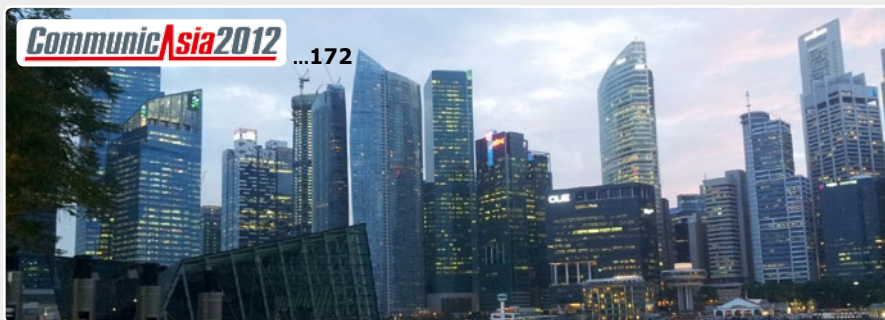

Feature:
Latest Technologies Came To Life at:
CommunicAsia Exhibition 2012 172

Company Report:
Satellite Wholesaler and Meter
Manufacturer DMS, USA 186

Company Report:
Original Equipment Manufacturer
Topsignal, China 200

Company Overview:
Best Digital TV Companies
of the World 216

Company Report:
Satellite Installer Nivaldo da Silva,
São Paulo, Brazil 228

Uplink Overview:
TELE-satellite's Best Satellite
Uplink Earth Stations 236

Company Report:
TV Programm Provider
ICN, USA 242

DXer Report:
Satellite DXer Oscar Campos,
Santiago de Chile 250

Satellite DXer Overview:
Hall of Fame of Satellite
Enthusiasts of the World 258

Technical Service:
Digital TV Transponder Streams
around the World 266

DTT of the World 302

TELE-satellite History:
TELE-satellite in 1982 308

TELE-satellite History:
TELE-satellite in 1992 310

TELE-satellite History:
TELE-satellite in 2002 312

Satellites of the World 316

**Global Readership of
TELE-satellite Magazine** 320

CHANGHONG

Professional in STB

CREATING EASY LIFE



Smart Center Box

- Android 2.2, 1080P HD
- Multi-screen interaction
- Content sharing with Pad, phone, STB
- Multi-media player
- 3D somatic games
- HTML 5 browser
- IP camera
- Smart remote control
- Changhong APP store



Products & Technologies

- DVB-C/T/S/C2/T2/S2, ISDB-T, IPTV
- Conax/Nagra/Irdeto/NDS
- MHEG-5/OpenTV/NDS Core/MHP
- Android/OS21/Linux/μ_iTron
- OTT/HBBTV/CATCH UP TV/UNICABLE

Company Profile

Established in 1998, Sichuan Changhong Network Technologies Co.,Ltd is now one of the largest professional STB suppliers in China. With the experienced R&D team and qualified project management, Changhong Network provides the consumers with leading products and technical solutions...



MHEG-5



openTV



NDS Core



m@p

SICHUAN CHANGHONG NETWORK TECHNOLOGIES CO.,LTD

ADD:35,East Mianxing Road,High-tech Park,Mianyang,Sichuan,China

Tel:0086-816-2410305 Fax:0086-816-2417040 Zipcode:621000

Http://www.changhong-network.com

E-mail:stbinfo@changhong.com

8DTEK	China	69	IBC2012	UK	163
ALUOSAT	China ...81, 117, 133, 139		INTERBEE2012.....	Japan	147
AMIKO.....	Hungary.....	41	JIUZHOU	China	324
ANTIFERENCE	UK.....	231	JONSA	Taiwan	233
APPLIED INSTRUMENTS	USA.....	203	KARMACOM	Hungary.....	41
AZBOX.....	Portugal.....	323	KWS	Germany.....	181
AZURESHINE.....	Taiwan	25	LEXIUM	USA.....	213
BAOTONG	China	57	MFC	USA.....	233
BEIJINGTOPREAL.....	China	143	MICO	China	2
BOIINGSAT	China	73	MOTECK	Taiwan	185
BSD	Brazil	257	NABSHOW2013	USA.....	159
BT.....	UK.....	241	OIPF.....	Sweden.....	265
CABSAT2013	Dubai	161	OPENSAT	Portugal.....	323
CASTOR.....	Netherlands.....	239	PANODIC.....	China	2
CCBN2013	China	177	PREVAIL.....	China	14-15
CES2013.....	USA.....	149, 171	SATBEAMS.....	Belgium	213
CHANGHONG.....	China	9	SATCATCHER.....	UK.....	19
CHINABROADCASTING	China	257	SATELLITEGUYS.....	USA.....	255
CHINASATELLITE2012	China	155	SATSON.....	Belgium	29
CNBROADCASTING	China	257	SBTVD	Brazil	265
CSTB2013.....	Russia.....	165	SCATINDIA2012.....	India	153
DEVISER	China	91, 189	SEN5	China	69
DEKTEC	Netherlands.....	101	SICHUANJIUZHOU.....	China	324
DEXING.....	China	83	SICHUANVIDEOELECTRONIC...	China	65
DIGITALTELEMEDIA	China	324	SKYWORTH	China	11
DISHPOINTER.....	UK.....	203	SMARTWI.....	Denmark.....	79
DVBCN.....	China	197	SOWELL.....	China	47
FTATV.....	Argentina.....	195	SPAUN	Germ. ...185, 195, 231, 255	
FULANELECTRONICS.....	China	5	SPAUN ELECTRONIC	Germany.....	51
GLOBALINVACOM.....	UK.....	87	SVEC	China	65
GOOSAT.....	China	53	TEHNICB	Romania	197
GOLDENMEDIA.....	Germany.....	61	TENOW	China	189
HANGZHOUPREVAIL	China	14-15	TEVII	Taiwan	181
HISILICON	China	4	TOPREAL	China	143
HORIZON	UK.....	95	WSINTERNATIONAL.....	USA.....	213

TELE- satellite Magazine Sells!

Leading Digital TV Equipment Manufacturers continuously choose **TELE-satellite Magazine** to market their products most successfully on a global scale

TELE-satellite Magazine is the #1 Global Digital TV Trade Publication for 32 years - and we continue to expand!

TELE-satellite Magazine is seen by

- Digital TV Manufacturers
- Distributors
- Dealers
- Wholesalers
- Installers
- End Consumers
- Program Providers

Read Worldwide in
More Than **180 Countries**

Are you interested in finding out more about what
TELE-satellite can do for you? Then contact us:

www.TELE-satellite.com/ads

Skyworth Digital

More than **30,000,000**
families are enjoying wonderful
and smooth Audio-visual experience
with **SKYWORTH DIGITAL** set-top boxes.

HD DVB-S/S2 HSJ1



MPEG4, 1080P, Conax CAS,
PVR / Timeshift



HS17 HD DVB-S/S2

MPEG4, 1080p, Conax CAS,
LAN, PVR/Timeshift




HS1C HD DVB-S/S2

2Tuners: S2+S2/S2+T/S2+T2/S2+C
(4 options) MPEG4, 1080p, CI, Conax CAS,
LAN, 2*USB, PVR & Timeshift



HTA5 HD DVB-T

MPEG4, 1080p, PVR/Timeshift,
Mediaplayer



HS15 HD DVB-S/S2

CI+, Conax CAS, LAN, MP4
1080p, PVR, Timeshift



HTJ2 HD DVB-T

MP4, 1080p, Conax CAS,
PVR/Timeshift, Mediaplayer



HTP1 HD DVB-T/T2

T/T2, MP4, 1080p PVR/Timeshift,
Powerful Mediaplayer



INNOVATION

PRODUCTS LEADING INTO




**INNOVATION
TELE
satellite
AWARD** 02-03/2012

AZBox ME
Today's absolute
best Linux Receiver


www.TELE-satellite.com/12/03/azbox-me



**INNOVATION
TELE
satellite
AWARD** 10-11/2011

Tenow TBS6984
Made for TV addicts who can never
watch and record enough channels.

www.TELE-satellite.com/11/11/tenow

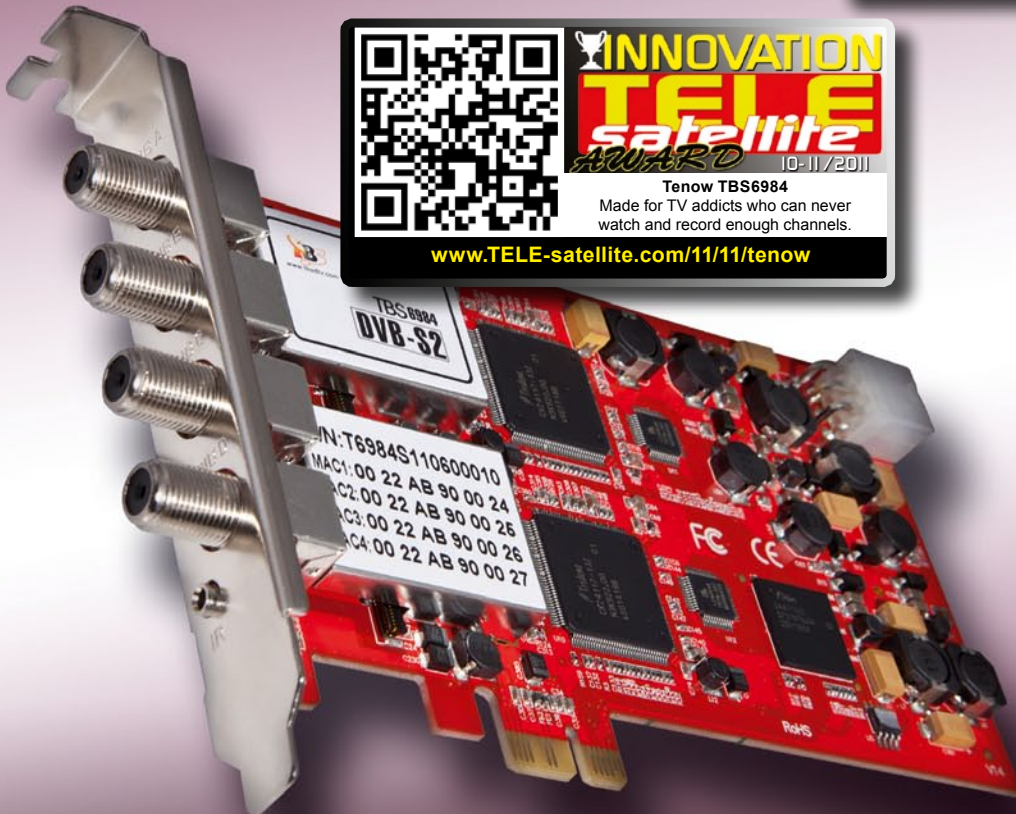

AWARD

THE FUTURE

INNOVATION
TELE
satellite
AWARD MAGAZINE



INNOVATION
TELE
satellite
AWARD 08-09/2009

GLOBAL INVACOM OPTICAL LNB
The first worldwide optical satellite
reception and transmission system

www.TELE-satellite.com/09/09/globalinvacom



INNOVATION
TELE
satellite
AWARD 06-07-08/2012

AMIKO ALIEN 2
Unbeatable combination of features and
function – for excellent viewing pleasure!

www.TELE-satellite.com/12/07/amiko

Prevail FobetmOC

HANGZHOU PREVAIL OPTOELECTRONIC EQUIPMENT CO.,LTD

The Large-scale Manufacturer in China's Television and Broadcast Industry!




WR8602RJ OPTICAL AGC RECEIVER



WR8604JL 4 OUTPUT OPTICAL RECEIVER



WR8602J 2 OUTPUT OPTICAL RECEIVER

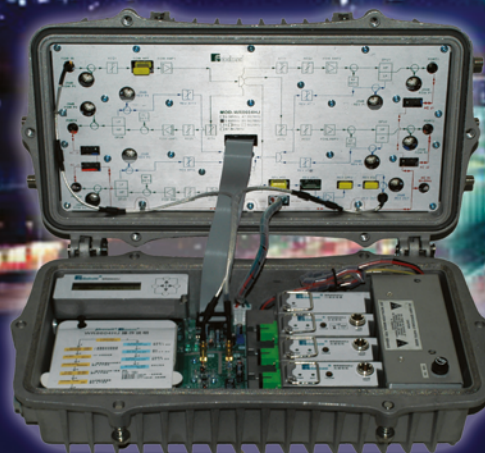

WR8604HJ FIBER OPTIC NODE



CATV SPLITTER AND TAP

CATV SPLITTER AND TAP

BI-DIRECTIONAL NETWORK TRANSMISSION EQUIPMENT

DIGITAL, ANALOG HEAD-END EQUIPMENT

1550nm, 1310nm FIBER OPTIC TRANSMISSION EQUIPMENT

EPON OPTICAL NETWORK EQUIPMENT

ADDRESS: Industrial Development Zone, Gugli Town,
Xiaoshan District, Hangzhou City,
Zhejiang, China.

TEL: +86-571-82559907 FAX: +86-571-82551107

E-MAIL: necy-xu@prevail-catv.com

Http://www.prevail-catv.com



ISO9001:2000



WDS-6100 SCRAMBLER

WDE-4420 ENCODER

WDE-4220 MPEG-2/4 ENCODER

WDM-4140 MULTIPLEXER

WDQ-3204 QAM MODULATOR

WDE-H2220 HD ENCODER

WDT-1204 TS RECEIVER

4 OUTPUT RETURN OPTICAL RECEIVER

WR8602JDS ROOM OPTICAL RECEIVER

OPTICAL SWITCH

WR8602RJL ROOM OPTICAL RECEIVER

1550nm INTERNAL MODULATION OPTICAL TRANSMITTER

1550nm EXTERNAL MODULATION OPTICAL TRANSMITTER

1310nm EXTERNAL MODULATION OPTICAL TRANSMITTER

ERBIUM DOPED FIBER AMPLIFIER



CATV OPTICAL FIBER COMMUNICATION SYSTEM PLATFORM.WOS-3000

AZBox miniMe



AZBOX miniMe

- *can be started with two different flash versions*
- *excellent integration in existing home network*
- *remote control compatible with AZBox ME – both receivers can be operated with the same remote*
- *blind scan function as special treat for DXers*
- *easy-to-use and intuitive on-screen menu*



Ever since we first tested the AZBox ME in TELE-satellite 02-03/2012 we simply cannot take our eyes off this receiver. The latest variant arrived at our test center in an unusually small box and carries the fitting name AZBox miniMe.

The AZBox miniMe sports a stylish 'set-top box design', which means it comes with an unobtrusive back plastic casing which will make it a suitable addition to all your existing home entertainment gear.

We were particularly taken to the slightly inclined side panels and the interesting design of the ventilation openings on the top side. In contrast to those unusual characteristics, the front panel looks rather conventional and comes with a button on the left to switch on the receiver. The button is surrounded by an LED that indicates the current operating mode of the receiver:

- **lilac:** deep standby
- **red:** standby
- **blue:** on

In addition, there is the 'AZBox miniMe' model designation in white lettering and the characteristic Z logo in black. Looks really great! To the right there is a mini phone jack which can be



■ Read Test Report of the AZBox miniMe's big sister AZBox ME in TELE-satellite 02-03/2012
www.TELE-satellite.com/12/03/azbox-me

used to connect an infrared receiver. This way the AZBox miniMe can be hidden out of sight in a cabinet or behind the TV panel, for example.

If you want to make use of that option you need to separately obtain the IR receiver, since the receiver itself is shipped without it.

Due its small size the back panel of AZBox miniMe looks a bit crowded, but that's only due to the fact that it offers

a surprisingly wide range of connections:

- **LNB-In und LNB-Loop:** Additional receivers or meters can be hooked up to the LNB loop-through output.
- **S/PDIF:** Music lovers and home theatre enthusiasts will

surely appreciate this optical digital output in connection with a digital amplifier. For analog processing you might require a digital-analog converter (DAC).

- **LAN:** An RJ-45 connection is a must-have feature



SATCATCHER

QUALITY ENGINEERING
HQ
HIGH

DIGIPRO HD S2

UNICABLE

TRUE HIGH DEFINITION TESTING

ASDTM

ACTIVE SATELLITE DATA

USALS

PERFECT MOTOR SETUP





DVB - S TEST
DVB -- S 2 TEST
WATCH HD TV
LBER TEST
UNICABLE
CAMERA TEST
22KHZ TEST
VOLTAGE TEST
NIT ID FUNCTION
USALS
ASD

PORTABLE DEVICE
VERY LIGHTWEIGHT
1GB MASSIVE MEMORY
HIGH BUILD QUALITY
UNIQUE FUNCTIONS
WORLD COMPATABLE
EXCELENT SERVICE
SUPERB VALUE
CALIBRATED READINGS
FULL EDIT BY HAND

NOTE: WE PRODUCE TRUE DVB METER PRODUCTS WHICH ARE DESIGNED AND DEVELOPED AS PROFESSIONAL METERS. WE DO NOT MANUFACTURE MINI STB RECEIVERS WITH AN ADDED LCD SCREEN !! ALL OF OUR PRODUCTS HAVE FULL EUROPEAN WARRANTEE WITH SPARE PARTS AVAILABLE AND ARE ALL FULLY LISCENCED .

OTHER MODELS AVAILABLE:
DVB-S/T DIGIPRO ST COMBO
DVB-S2 DIGIPRO IIIS HD
DVB-T 1GB DIGIPRO T MK2
DVB-S/C DIGIPRO SC COMBO
DVB-C DIGIPRO C MAX
DVB-S 1GB EXCEL-TV MK4 NIT

VISIT OUR WEBSITE FOR FULL SPECIFICATION AND ORDER DETAILS: WWW.SATCATCHER.COM
ALL PRODUCTS ARE AVAILABLE FROM YOUR LOCAL DISTRIBUTOR IN YOUR OWN LANGUAGE !

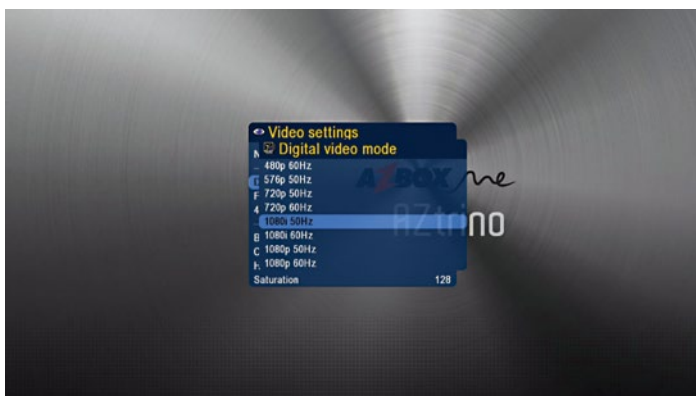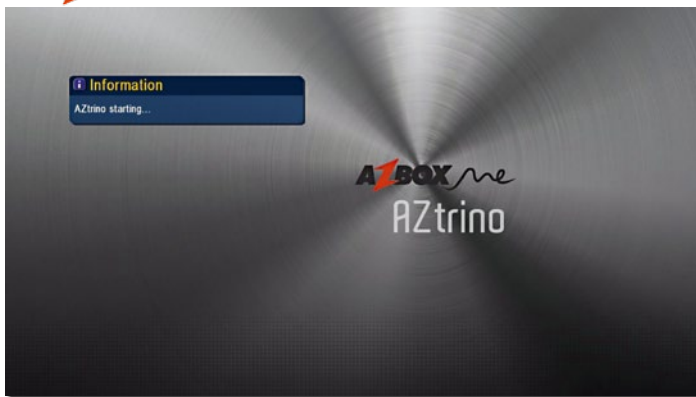

for Linux-based receivers, as it allows access to local servers and the Internet.

- **HDMI:** Our preferred method of connecting any digital receiver to a TV panel or monitor with a corresponding input interface. Both digital video and audio are provided via HDMI.

- **YPbPr:** A mini phone jack puts out a component video signal using the YPbPr colour scheme, which provides better video quality with higher resolution than the conventional FBAS signal. If you own a video projector without digital input options you will certainly be grateful for component video. The receiver is shipped complete with a suitable adapter cable.

- **Recovery switch:** This is a neat feature for reconstructing the boot loader in case an unsuccessful flash attempt has damaged the receiver's firmware. We'll deal with that in more detail a little later.

- **A/V:** Another mini phone jack is available for composite video and an audio/video signal. Older TV sets can be connected directly or with the help of a eurocart adapter, depending on the available input socket(s) of the TV. Once again, the corresponding A/V cable is supplied, while those requiring a eurocart adapter have to obtain one on their own.

- **Two USB interfaces:** You can use those to attach external hard disks, flash memories etc.

- **e-SATA:** This connection can be used instead of the USB ports for connecting an external hard disk. e-SATA supports higher transfer rates than USB.

- **12V/2A socket:** Like the AZBox ME the AZBox miniMe comes with an external power supply unit. This reduces the heat that is generated inside the receiver and also facilitates mobile use in caravans, for example.

There is no mechanical on/off switch, but with an external power supply unit this is not really required. You can always plug out the cable

from the mains to fully disconnect the receiver, even though we recommend using a switchable power strip to be on the safe and economical side. Obviously, we checked power consumption in deep standby, standby and on modes. Please refer to the chart at the end of the report for all results.

The internal smartcard reader is located on the left side of the AZBox miniMe and by default it is not active, which means it does not support any encryption system known to us. The remote control is the same that also comes with the AZBox ME, so we were able to swap the remotes and still operate both receivers with any of the two remote controls.

The remote sits nicely in your hand and sports an ergonomic design that allows reaching all buttons with your thumb. What might be confusing at first is that in addition to the usual ring-shaped buttons around the OK button there is another set of six buttons in an outer circle.

New users might find themselves pressing the EPG button instead of the DOWN button when zapping channels at first, but after a short while your thumb won't miss its target. What's more, we've been using the AZBox ME quite intensively in recent months so it's great to know we can just stick to the same remote.

If truth be spoken, it only trickles down after a while how smart the layout of the remote is: As mentioned above, all buttons can easily be reached with the thumb and individual buttons can be distinguished even without looking at them.

The actual high point of the remote control, however, is only revealed at second sight: If you open the battery compartment you will detect a small button that activates a learning function.

With that you can re-program the right button in the first row of the remote. By default it turns on and off the TV, but you can change that

to any desired command. In theory you won't even need the TV's remote control any longer, which is an absolute bonus in this day and age of multimedia overload.



Apart from the receiver, the remote control and adapter cables for component video and composite video mentioned above, the manufacturer also supplies a short manual and two AAA batteries for the remote.




Before we went about checking out all features and functions of the AZBox miniMe we first looked at aspects differentiating it from the AZ-Box ME. After all, the 'mini' in the model name is there for a reason.

Even though the standard AZBox ME is by no means a large receiver, the miniMe

	AZBox miniMe	AZBox ME
CPU	SIGMA processor SMP 8653	SIGMA processor SMP 8655
FLASH	256 MB	512 MB
RAM	DDR 128 MB	DDR 256 MB
VIDEO	DDR 128 MB	DDR 256 MB
Tuner	Single tuner (DVB-S2)	Single tuner (DVB-S2)
HDD	eSATA	eSATA and internal SATA
Video Container	MPEG1/2/4 (M1V, M2V, M4V); MPEG1/2 PS (M2P, MPG); MPEG2 Transport Stream (TS, TP, TRP, M2T, M2TS, MTS), VOB, AVI, ASF, WMV, IFO, ISO; Matroska (MKV), MOV (H.264), MP4, RMP4	MPEG1/2/4 (M1V, M2V, M4V); MPEG1/2 PS (M2P, MPG); MPEG2 Transport Stream (TS, TP, TRP, M2T, M2TS, MTS), VOB, AVI, ASF, WMV, IFO, ISO; Matroska (MKV), MOV (H.264), MP4, RMP4
Video Codecs	XVID SD/HD; MPEG-1; MPEG-2: MP@HL; MPEG-4.2: ASP@L5, 720p, 1-point GMC; WMV9: MP@HL; H.264: BP@L3; H.264: MP@L4.0; H.264: HP@L4.0; H.264: HP@L4.1; VC-1: MP@HL; VC-1: AP@L3	XVID SD/HD; MPEG-1; MPEG-2: MP@HL; MPEG-4.2: ASP@L5, 720p, 1-point GMC; WMV9: MP@HL; H.264: BP@L3; H.264: MP@L4.0; H.264: HP@L4.0; H.264: HP@L4.1; VC-1: MP@HL; VC-1: AP@L3
Audio Container	AAC, M4A, MPEG audio (MP1, MP2, MP3, MPA), WAV, WMA, FLAC, OGG	AAC, M4A, MPEG audio (MP1, MP2, MP3, MPA), WAV, WMA, FLAC, OGG
Audio Codecs	AAC, AAC+, DTS, WMA, WMA Pro, MP1, MP2, MP3, LPCM, FLAC, Vorbis, DTS (Audio Passthrough)	AAC, AAC+, Dolby Digital Plus, DTS, WMA, WMA Pro, MP1, MP2, MP3, LPCM, FLAC, Vorbis, DTS (Audio Passthrough), Dolby Digital Plus (Audio Passthrough)
In/Output Front	Coloured Leds; Power Button; 1x IR Jack;	1x USB 2.0; Coloured Leds & VFD; Power Button
In/Output Rear	1x HDMI; 1x JACK; 1x e-SATA; 1x RJ45; 1x Optical S/PDIF; Power Switch; 2x USB 2.0; 1x AV connector;	1x HDMI; 1x Component (YcbCr); 1x RCA Video; 1x RCA Audio (L/R); 1x e-SATA 1x RJ45; 1x USB 2.0; 1x Optical S/PDIF; Power Switch;
Card Reader	1x (side)	1x (side)

■ Table 1.

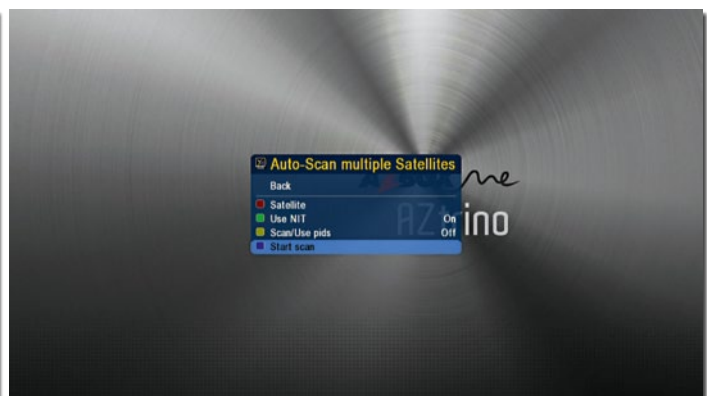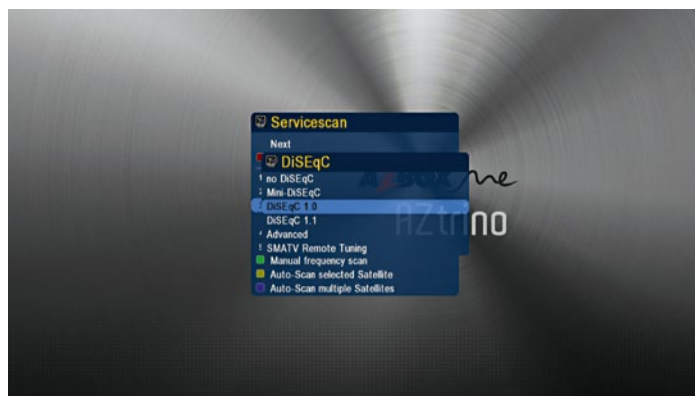

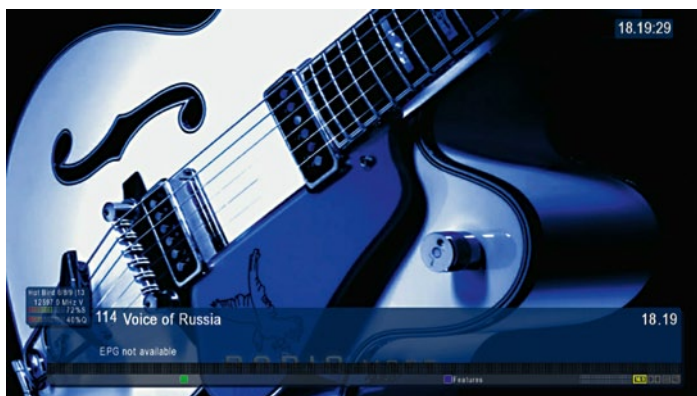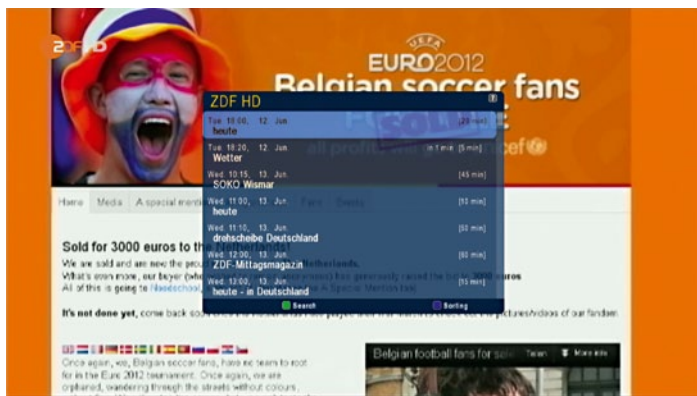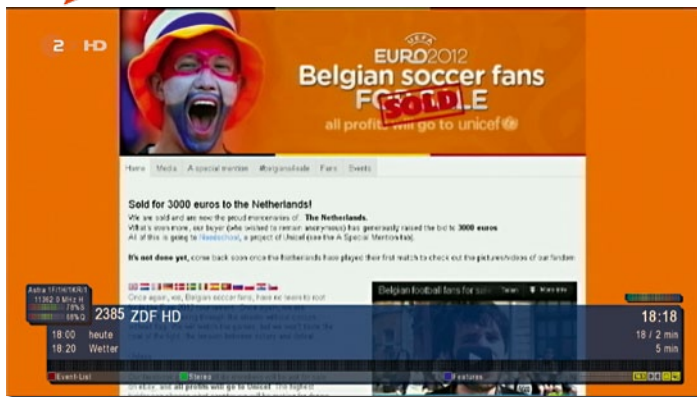

is considerably smaller. An overview of the distinguishing factors between the two can be seen in our table.

The receivers use different processors, even though both are clocked with 1230 DMIPS at 500/333 MHz (CPU/DSP) and thus are largely identical.

There are only marginal differences which go unnoticed by users, since the processing capacity is identical and in both receivers the CPU is not fully exploited. In theory, for example, both processors could support even more flash memory. The single genuine processor-based distinction is Dolby Digital Plus, which is only available with the AZBox ME thanks to its SIGMA SMP 8655 processor.

Here is a quick rundown of the major differences between the two receivers:

- **Hard disk:** While it is possible to install in internal 2.5" HDD in the AZBox ME, the miniMe only allows an external HDD via USB or e-SATA.
- **Firmware:** The flash memory of the AZBox ME can store three different firmware versions. When switching on the receiver you can either press 0, 1 or 2 on the remote control to select the firmware you prefer. With the AZBox miniMe it is only possible to store two different firmware versions in the (smaller) flash memory (0 and 1).
- **Display:** With the AZBox ME you get a blue alphanumeric VFD display showing the channel name when switched on and the current time when in standby. The display is particularly important when selecting the firmware version to boot from – the display will show BOOT[0], BOOT[1] or BOOT[2] so that you know you can release the corresponding button on the remote control. The AZBox miniMe does not feature such a display, which means you select the firmware by pressing the respective button (0, 1 or VOL+) and most

probably keep your finger on the button much longer than required.

The AZBox miniMe we received for testing came with pre-installed AZtrino v1.6. We checked on the manufacturer's website (<http://www.azbox.com>) and found out that it was the current firmware for the receiver.

Once we had connected all cables to the receiver we were finally able to turn it on. It always surprises us no end to see how user-friendly a receiver can be with top-notch software. In this case we were smoothly guided through various configuration steps by an efficient wizard, starting with language selection.

Even though this receiver is small, the range of available languages is huge and we cannot think of a box that offers more options!

Video resolution is next, with all modes from 480p to 1080p being available, either with 50 Hz or 60 Hz. Obviously, it is also possible to select interlaced mode (i) for all resolutions. We went for 1080i, a configuration that is very popular in Europe.




What follows is the correct time zone, and here too the manufacturer seemed to have thought of all corners of the world.


From these basic settings we are guided to the network parameters. DHCP is activated by default, and this actually makes sense since the router automatically assigns all required values and addresses.

If you prefer to work with a static user-defined IP address you can of course also manually set all parameters.

At this stage you can even define a so-called time server from which the AZBox miniMe obtains the exact time.

While it is true that the current time is also transmitted with DVB-S/S2 data streams we found that some providers are simply incapable of sending a correct and standardised time stamp so that it may happen during zapping

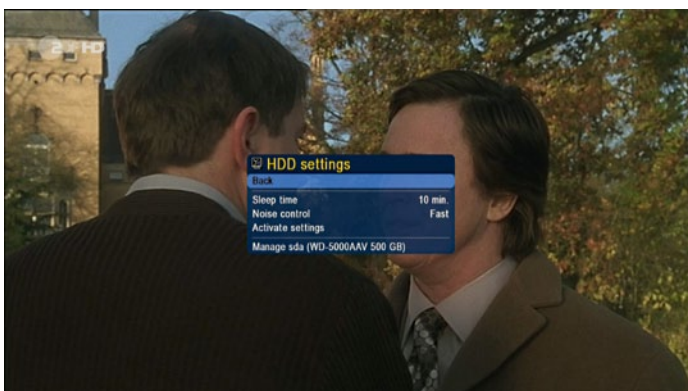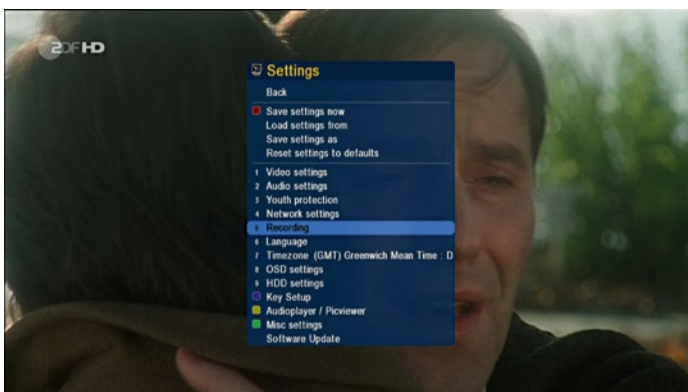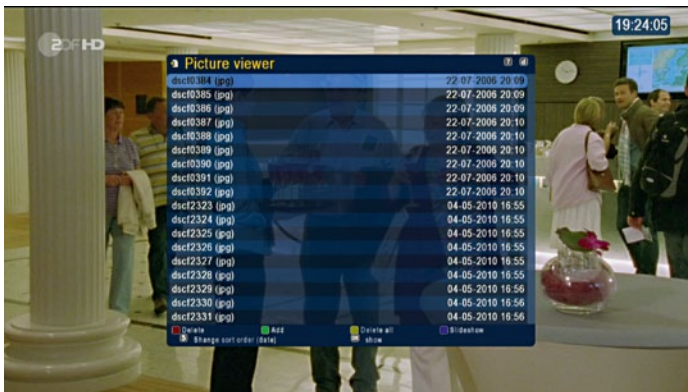

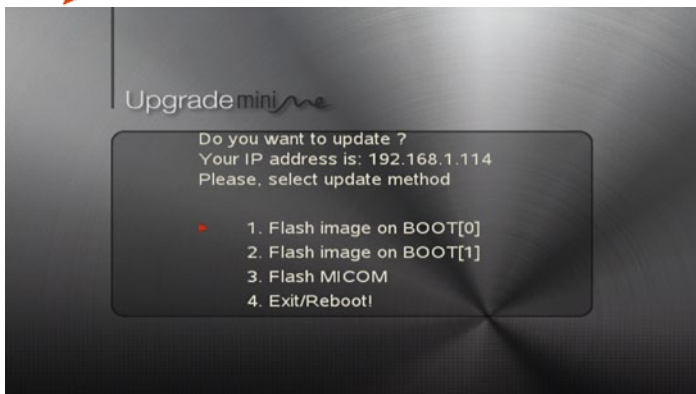

that the receiver's internal time jumps back and forth an hour or two. Thankfully, there is a time server (NTP – Network Time Protocol) already pre-set in the AZBox miniMe: time.tu-berlin.de.

Now we're only one step away from actually watching TV with the AZBox miniMe, and this final step deals with getting the receiver to work with the reception equipment in place.

Just so you know, all DiSEqC protocols are supported. We began with connecting the box to our existing array of antennas, which consists of four flat antennas aligned to the following positions:

DiSEqC-1 - ASTRA 1 (19.2E), DiSEqC-2 - HOTBIRD (13.0E), DiSEqC-3 - HISPA-SAT (30.0W) and DiSEqC-4 - ASTRA 2 (28.2E).

For that configuration to work you don't even need to consult the manual, since all OSD menus are self-explanatory.

We then initiated a channel search across all four positions, which had us waiting for a total of 34 minutes. While this is a tad on the long side, we were rewarded with 3178 channels, which is quite

an impressive result for a standard search with 60cm flat antennas in bad weather.

Speaking of the channel search, the AZBox miniMe comes with a tuner that is capable of performing blind scan searches, just like the larger AZBox ME. The current AZtrino firmware supports blind scan as well, which is why we couldn't refrain from hooking up our 2.4m mesh antenna with C band LNB for a blind scan search on 37.5W.

The AZBox miniMe flawlessly detected a number of transponders as well as the Metro TV channel from Ghana. This signal is broadcast with a symbol rate of 1674 and an FEC of 7/8. While the resolution of only a quarter of PAL standard is very unusual and feels like an insult to the eyes – especially when compared to all the latest FTA HD channels on ASTRA 1 (19.2E) – it is truly exciting to be able to watch African TV in Europe. All DXers out there will surely understand what we mean!

The only thing that was not met with our approval was the wrong indication of the transponders' frequencies: The figures given were based on a universal LNB, even



Intelsat / GVF Type Approved


■ Original designer of patented rolled edge reflector

■ Production capacity(≥ 1 Million units per month)

■ High performance

■ Highly accurate reflector surface($\text{RMS} \leq 0.1\text{mm}$)

■ State of art test equipments and facilities



VSAT Antenna System

DTH Antenna System

Fly Away, Movable Antenna





AZURE SHINE INTERNATIONAL INC.

No. 1000, Gwang Fu Road, Pa Teh City, Taoyuan, 33455, Taiwan R.O.C.

Http://www.azureshine.com.tw/ E-mail: azure.shine@azureshine.com.tw

Tel: 886-3-3611393 Fax: 886-3-3615877



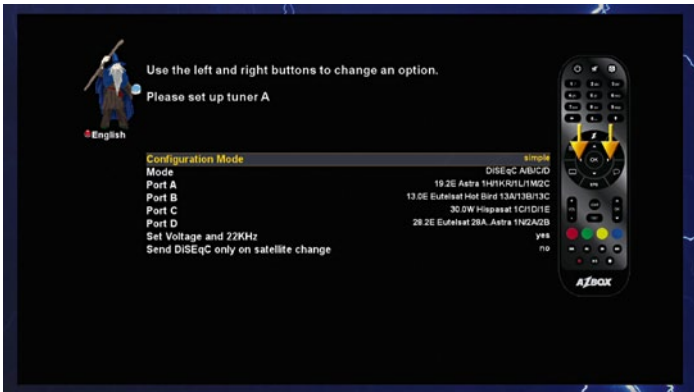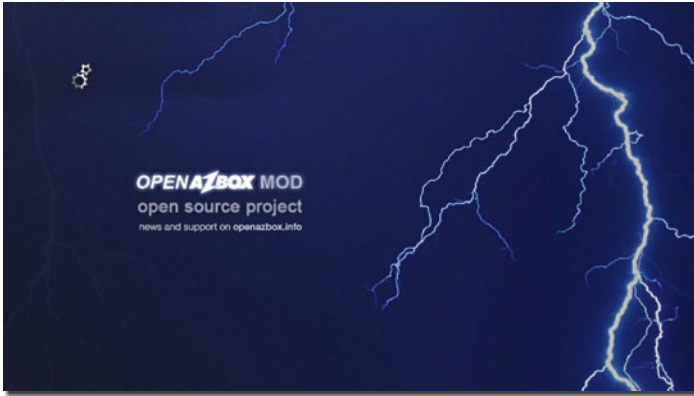

though our LNB was specifically configured as a C band LNB. Apart from that, we were genuinely pleased with the blind scan results.

Let's turn to another very important aspect now. After all, the blind scan option is nice to have, but a receiver can only prove its worth in everyday use for watching television.


No need to worry as far as the AZBox miniMe is concerned: It offers fast channel switching and comes with a very reliable software environment. During our test we were never faced with any freezes and all standard functions such as EPG, teletext or subtitles worked without a glitch.

In order to test the PVR function we attached an ex-

ternal hard disk to the USB interface of the AZBox miniMe. It was formatted with FAT32 and already included a number of multimedia files, so that we were able to find out how easy or difficult it would be to use a pre-formatted hard disk with existing files in connection with the AZBox miniMe.

To cut a long story short: The external HDD was detected automatically and added to the directory tree under /media/sda1.

The only thing we had to add manually was the path for the time-shift directory which is normally created automatically at the time a hard disk is formatted by the AZBox miniMe's AZtrino firmware. In our case the external HDD already had some

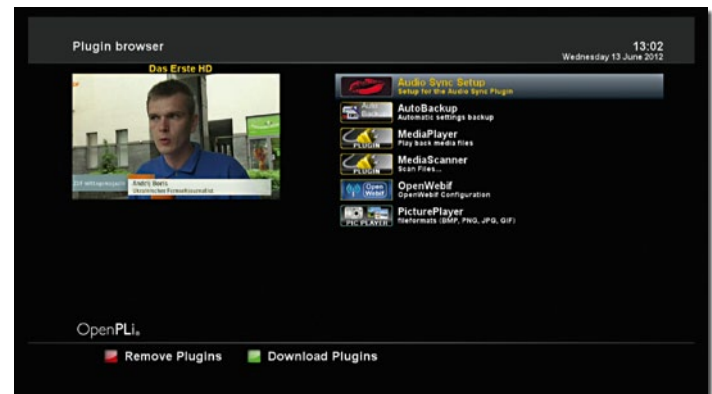

files on it that we of course wanted to keep, which is why we added the time-shift and recording directories manually.

Once that was accomplished we were able to use those functions to the full and could not detect any flaws. Everything worked just the way we knew it from other Linux receivers.

We went through all other menu options as well and also tested a motorised antenna with the SG2100 DiSEqC 1.2 motor from Motek, which worked right away. This part of our test was completed extremely quickly since we used the existing settings from our AZBox ME. It pays off to stick to products from the same family!

Last but by no means

least we opened the Internet browser on our PC and entered the IP address of the AZBox miniMe.

Spoilt by the AZBox ME, we had certain hopes in that regard and luckily the miniMe did not disappoint us. The website of the receiver appears on the monitor and allows remote access to all receiver functions.

In addition, it is even possible to stream the currently received channel across the entire home network. Sitting on your work desk and at the same time watching a soccer match? No problem at all thanks to the AZBox miniMe!

This is a receiver that meets all of our demands: The pre-installed firmware lives up to its promises and

the receiver has treats in store for everybody.

If you like watching films and playing back multimedia files you can simply hook up an existing hard disk and watch or listen to more or less all file formats.






If you're the adventurous type and love to spend hours on end hunting for out-of-the-ordinary channels from exotic positions or for feeds that are not intended for the average viewer you will greatly appreciate the blind scan function.




For the rest of the family who merely wants to watch TV this receiver offers ease of use and a logical user interface. Who could possibly ask for more?

Well, there is always more. More features and more functions, thanks to alternative firmware versions that can be used optionally.

Just like with the AZBox ME you can find a range of different firmware distributions for the AZBox miniMe. There is the official AZtrino firmware, with which the receiver is shipped by default.

And then there's a firmware version called RTI or an OpenRSI version. It's really

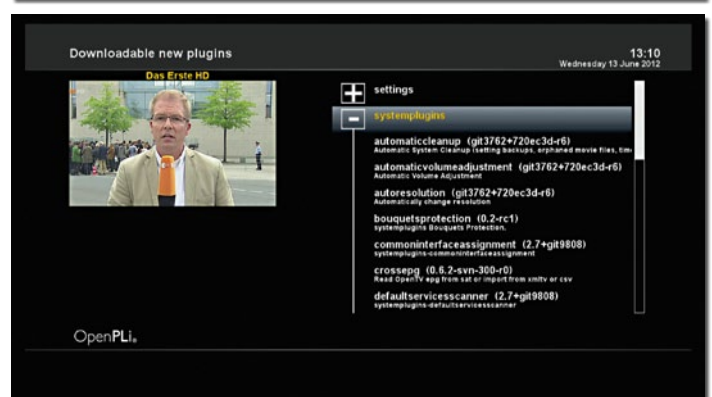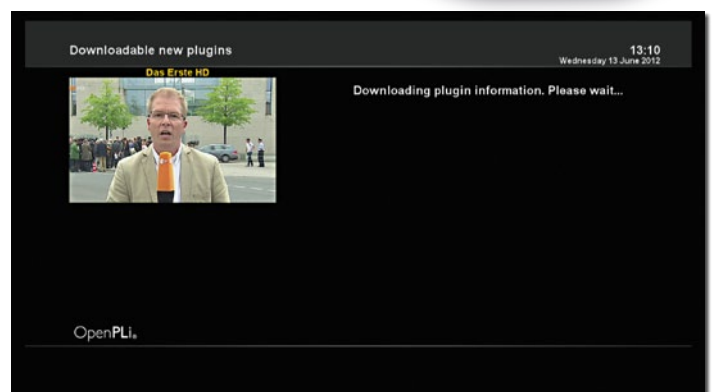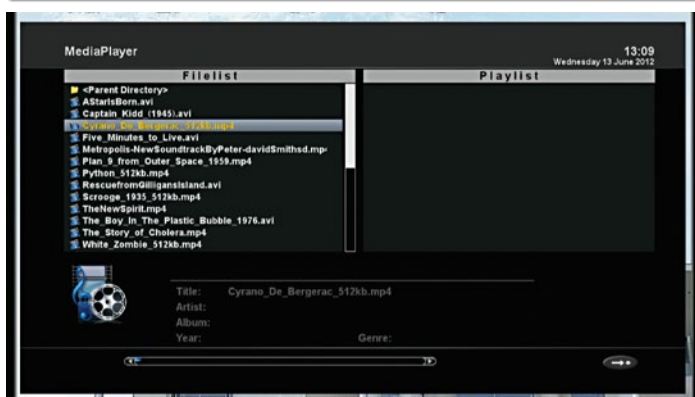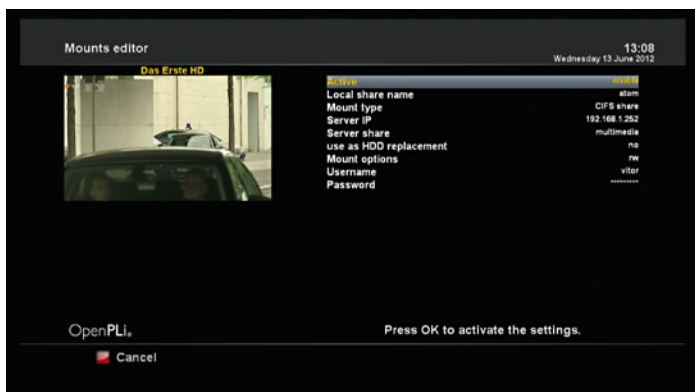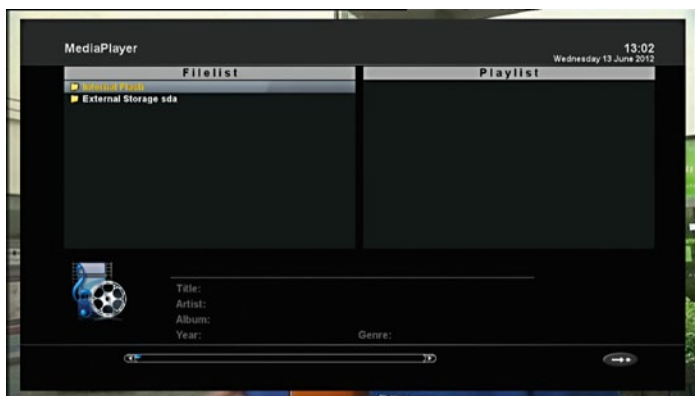

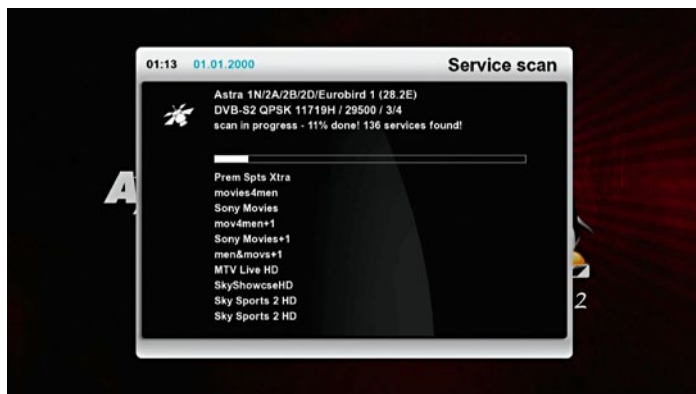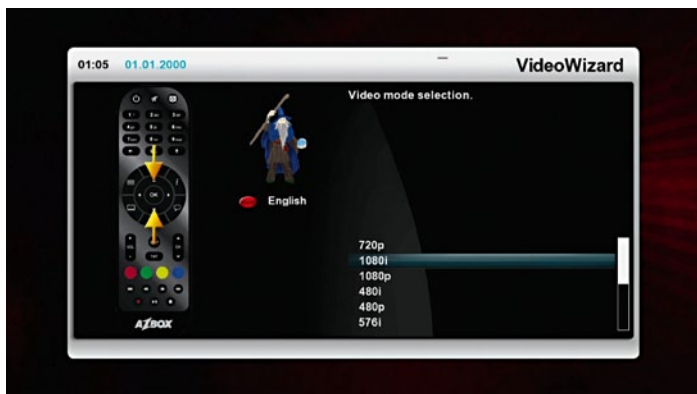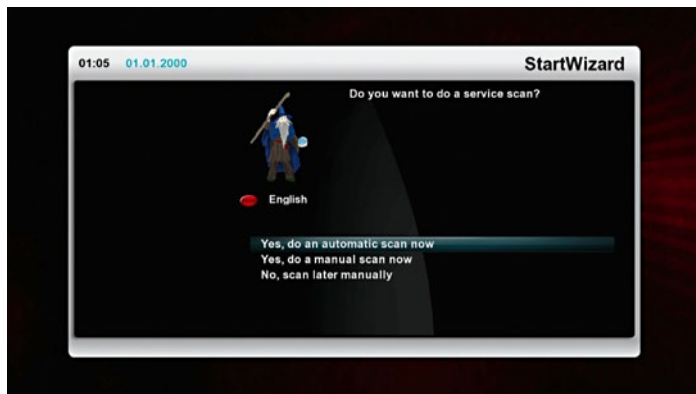

not hard to guess that we tried out both!

First we had to find out how to install new firmware in the first place. The short manual that is shipped with the receiver is rather vague regarding alternative firmware and the missing VFD display does not help either.

Just like the AZBox ME the miniMe is started with the 0 or 1 button of the remote pressed in order to boot from flash memory 0 or 1. The AZ-Box ME offers a third option by pressing button 2. Alternatively you can press the VOL+ button to access the flash menu.

The AZBox miniMe does not have a display, so even though you press either 0/1

or VOL+ you have no information on whether your command is being executed or how long you need to press the button. This felt a little strange at first and to be on the safe side we kept our finger on the button until the first screen appeared on the TV.

After a while, however, we knew intuitively when to release the button, and we even discovered that the power LED flashes shortly right after the selection has been executed.

Contrary to the AZBox ME a flash menu appears on the screen. At that stage it is possible to either flash the receiver with BOOT[0], Boot[1] or MICOM (front-end



new

MODULATOR HD DVB-T / TNT HD-MOD-001T

- ▶ Integration of HD Encoder and DVB-T Modulator in one box.
- ▶ Various video input include: HDMI, Component Video (YPbPr) and Composite Video (CVBS)
- ▶ Multiple video format compatibility including 1080i, 720p, 576i, 576p, 480i and 480p
- ▶ Multiple audio format compatibility including MPEG-1 Layer II
- ▶ Fully comply with DVB-T standard
- ▶ Frequency range : 50~860MHz
- ▶ Programmable video/audio/PCR PID
- ▶ Programmable channel name and logical channel number insertion
- ▶ User friendly setup and control,
Remote management through Telnet



processor), or to restart the box. The current IP address of the receiver is indicated as well, so that you can flash the receiver from your browser on the PC. In that case the screen goes blank and you control the receiver from the PC.

This is when we had to try out a few things since the procedure is different from the one with the AZBox ME.

To start with, we had downloaded a firmware version that was offered as a TAR file. WinRAR then identified this file as corrupt, even though it was perfectly all right and included the flash image as well as the kernel file. This TAR file can be flashed via the browser on the PC.

Alternatively, you may go for firmware files that come in the RAR format. In that case you will need two files, one with the flash image (image0.jffs2) and the other with the corresponding kernel (zimage-linux-xload).

Please note that what you just read is not a typo: Using the browser you need a firmware image in TAR format, using USB you require two files that are downloaded as a single RAR archive and then unpacked onto the root directory of the USB memory. Sounds complicated? You bet, but that's the way it works...

Both the AZBox ME and the AZBox miniMe use a joint kernel in the flash memory, that works with the different firmware version. While this certainly has its benefits, it also means that the firmware version you intend to install must be compiled for that particular kernel version since they all share it.

What follows from this is that we were unable to keep the current AZtrino and the RTI firmware in the flash memory at the same time, since the two require different kernel versions. If you do start a firmware with the wrong kernel your screen will stay blank. However, the receiver can still be addressed via Telnet.

So we had to test the different firmware versions one after the other. This is not such a big deal, and we expect the three firmware versions to be available for the same kernel shortly. Considering the short time that this receiver is on the market, the number of available firmware versions is already very impressive.

We mentioned on several occasions that the AZBox ME and the AZBox miniMe are very similar in many ways, so we went about installing the ME's AZtrino v1.7 on the mini-Me. To that end we changed the file extension from IMP to RAR and extracted the two firmware files onto our USB memory. Installation was successful and we could address the receiver via Telnet. The TV screen, however, remained dark.





At this stage we were lured into a flash tour as we simply did not want to believe we'd manoeuvred ourselves into a dead end. The final result after some 20 minutes was: rien ne va plus!





Most other receivers would have earned the name 'brick' by that time, but the AZBox miniMe comes with the famed recovery button. Simply switch it to recovery and reboot the receiver.



The power LED will flash in orange colour during that process and when the receiver is all set again it will turn to blue. After deactivating the recovery switch we restarted the receiver and were greeted by the familiar flash menu soon after.

This allowed us to install the standard AZtrino v1.6 firmware again. It remains a mystery to us why other manufacturers don't make use of this brilliant safety measure as well. Then again, this is one of the distinguishing features of the AZBox miniMe and you never need to despair after an unsuccessful flash attempt.

We continued with the current v1.85 of RTI. While installation went smoothly, you should make a point of

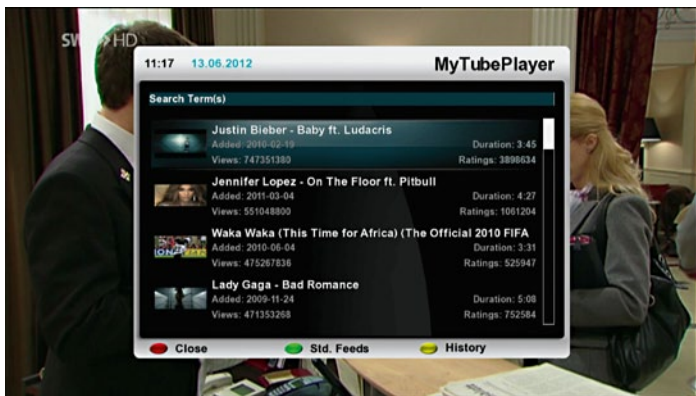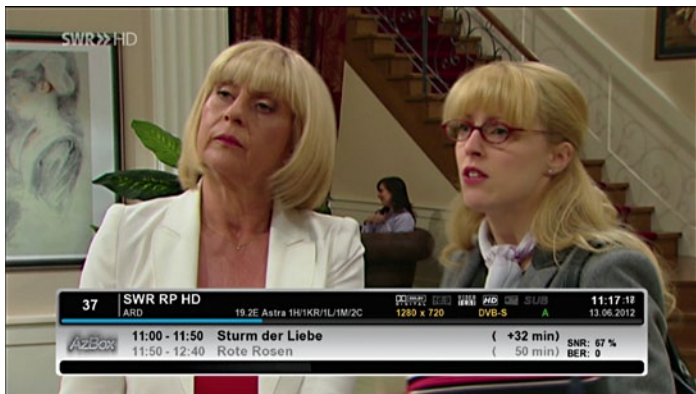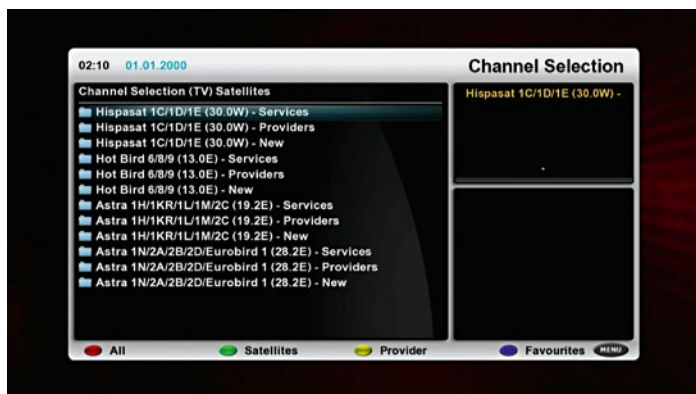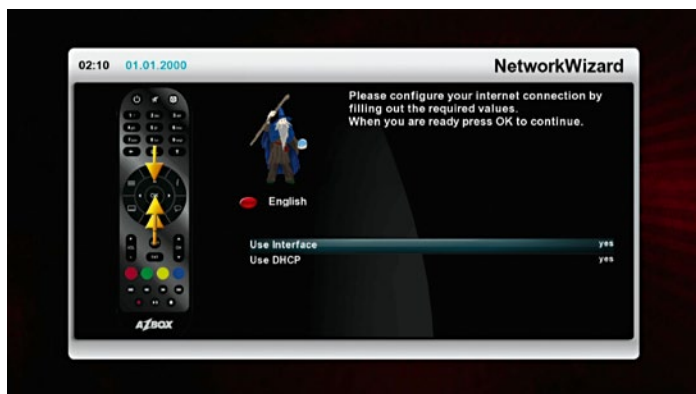

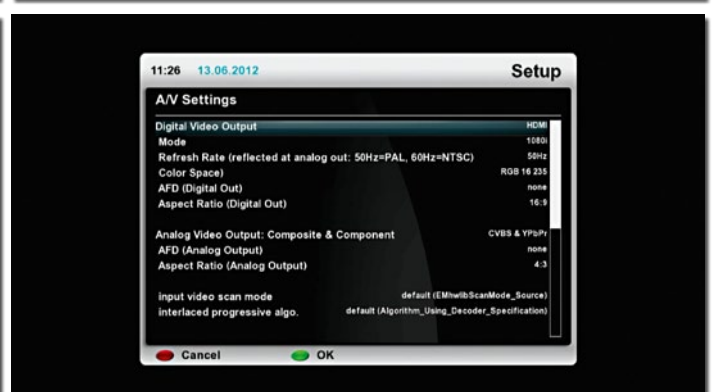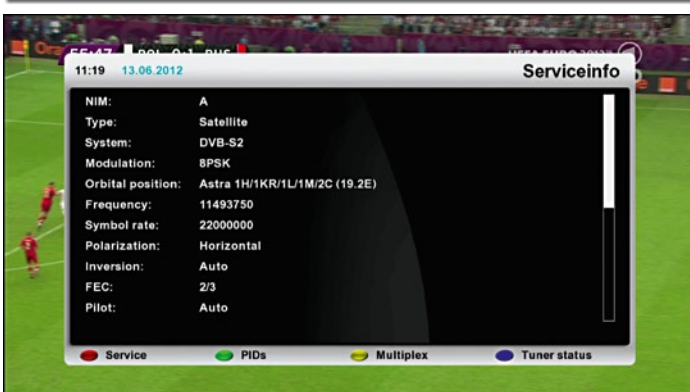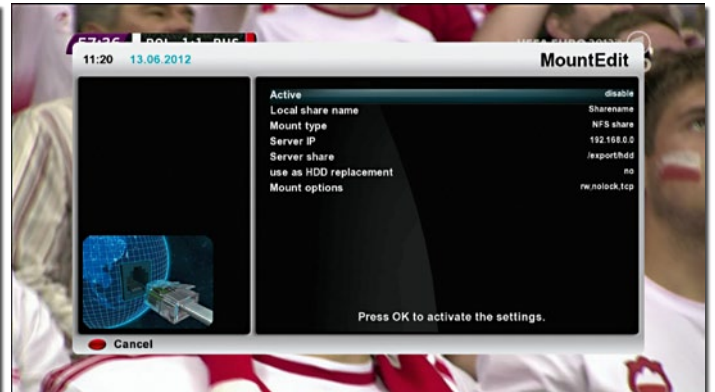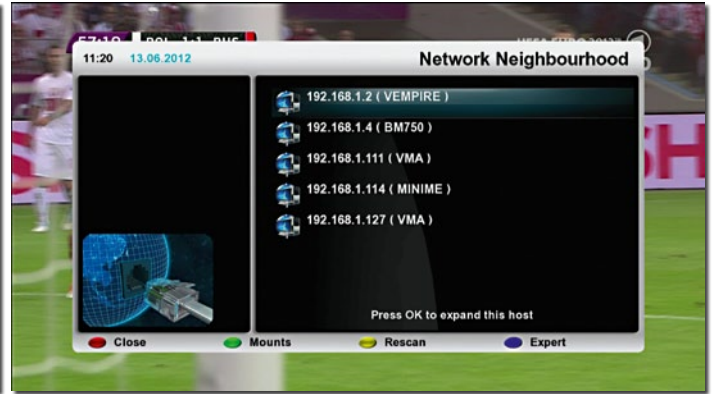

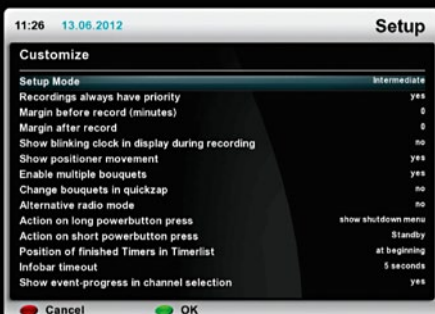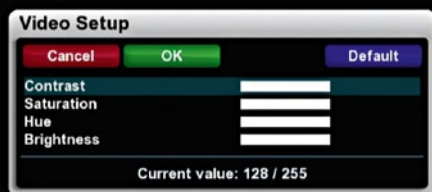

removing the USB memory after flashing so that the receiver does not automatically start the flash menu.

Again, the receiver needs to be re-started after the flash routine and it first shows the RTI welcome screen, followed by an installation wizard.

The first parameter that needs to be adjusted is screen resolution, which we once again set at 1080i with 50 Hz. Language selection is next and just like with AZtrino the list of options is very long.

Finally, we had to configure our reception equipment. To that end we selected the SIMPLE mode and entered the four satellite positions we can receive. After that, we were able to initiate a channel search, which was completed after 48 minutes with a result of 4017 channels in total.

We should like to mention at this point that the weather had vastly improved since the previous search and when looking up we saw a blue sky instead of grey cloud.

We went on to test the media player of the RTI image, only to find out that the firmware version we used came with a bug of the media player which meant that films or music just would not play back. What a shame, even though we are convinced one of the upcoming release versions will address that issue.

While we were at it, we simply could not keep our fingers off the OpenPLI image either. In terms of functions, it is largely identical with the RTI image, even though the pre-installed skins obviously look different.

You need to dig a little deeper to discover the differences: The OpenPLI firmware comes with a different media player which was able to access all of our films on an external USB HDD or via the local network. The player even displayed subtitles correctly.

On the other hand, blind scan is not available with this

image. As they say, you win some, you lose some...

Just like with the RTI image there is a pre-installed plugin server which provides a wide range of plugins and therefore can be used to expand the range of features of the receiver enormously. Among other things, e-mail plugins are available as is access to various content libraries.

Once again, the AZBox manufacturer has come up with a new product for a market segment that has been neglected so far.

The AZBox miniMe is a very small Linux receiver with elegant, yet low-key looks plus a range of functions and features that are second to none. For more information about general features of the AZBox range please have a read of our 'AZBox Receiver Software' series which focuses on a specific aspect in each issue of TELE-satellite.




In spite of its small size the AZBox miniMe does not heat up even during heavy-duty use: lukewarm is all we could feel. There is no built-in fan required, which means the unit does not create any noise whatsoever.

No matter whether you only want to watch satellite television or tinker with your hardware and software: The AZBox miniMe is the way to go. Not only is it possible to install different firmware versions, two images can even be installed at the same time, provided they work with the same kernel.

If worse comes to worst, you can always switch the recovery button which will quickly get you out of troubles with a working image.

Trying out new plugins is fun, and creating network shares with all associated possibilities will keep you entertained for days. Even the missing front display can be retrofitted – find out how by reading 'Digital Picture Frame for the AZBox ME' in TELE-satellite 06-07-08/2012.

Thanks to the IR jack it also possible to position the receiver completely out of sight

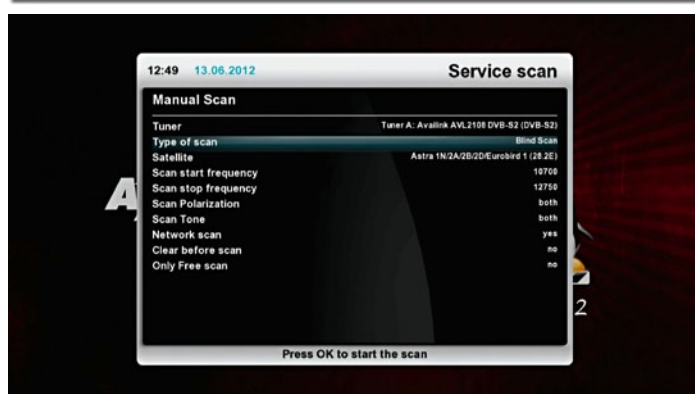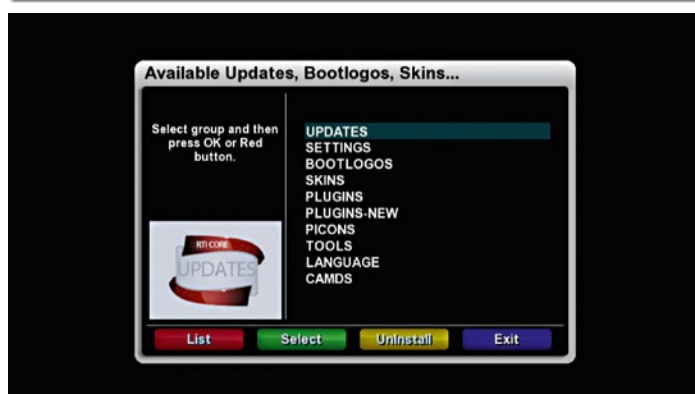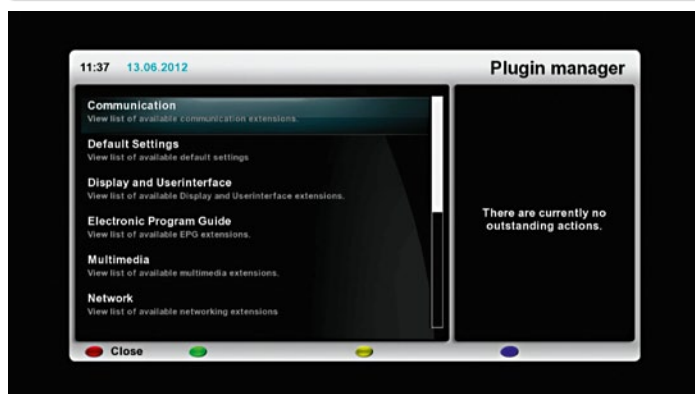

and only place the picture frame and IR receiver next to your flat screen TV. Use it as you like, the sky's the limit!

As far as multimedia use is concerned the AZBox miniMe will also become your best mate: It plays back all current file formats either from e-SATA or USB hard disks or via your local network.

Now the big question that begs answering is: Which receiver should you opt for? Is the AZBox ME the box for you, or rather the AZBox miniMe?

You really want an answer from us? Take both! There you go. Or better still: One AZboxME and several AZBox miniMe's!

The average home these days has more than one TV: There's one in the living room, the master bedroom, the children's rooms and more often than not the kitchen as well. And that's not even counting the study, basement, or any other area in your house or apartment. TV has become a by-word for multimedia.

Long gone are the days when the whole family assembled in front of the telly to watch one of only three available channels. With hundreds or thousands of satellite channels available, there is no way a family would ever agree on a particular channel to watch.

What's more, in this day and age you want to watch the beginning of a movie from the couch in your living room, and the end from your bed in the bedroom.

That's why it does make sense to own more than one receiver, and to hook them all up to your local network.

This is where all the capabilities of the AZBox ME and the AZBox miniMe come to the fore.

The ideal set-up would consist of an AZBox ME in the living room, equipped with a large-capacity hard disk and acting as server. AZBox miniMe's can then be installed

in all other rooms with a TV. These need not have a HDD attached, since recordings and time-shift viewing can be accomplished with the networked AZBox ME in the living room.

This way all multimedia content and recordings can be distributed to all clients and films downloaded from the Internet can be played back by simply connecting the USB storage device to any of the AZBox receivers.

The really great thing with such an environment is that two different categories of receivers can be used simultaneously with identical firmware and the same remote control.

Even the not so tech-savvy members of your family will like that because they can easily change from the 'small' to the 'large' receiver without worrying about different user interfaces.

Make no mistake about it, the AZBox miniMe is a fully-fledged satellite receiver all by itself and offers almost the same range of features as the AZBox ME, but at a slightly lower price.




All we're saying is that a reduced price brings with it the differences mentioned above: A smaller flash memory allowing only two firmware versions at the same time, no internal hard disk and no front display.

If you can easily do without those features we can happily recommend the AZBox miniMe, as it is on par with the AZBox ME, our reference receiver.

Once again Opensat, the manufacturer of AZBox receivers, is to be congratulated.

The AZBox miniMe is a great small Linux receiver with which Opensat adds further proof that the AZBox series is here to stay.

For us (and you) this means continued technical support and a steady supply of new and improved firmware versions, just like we have come to appreciate for the AZBox ME.

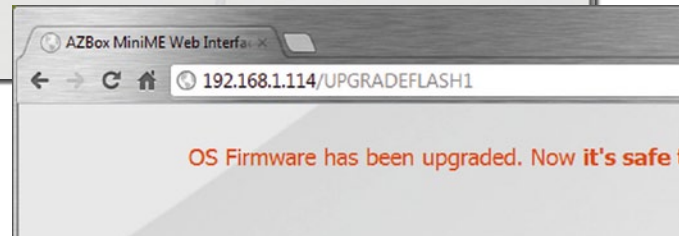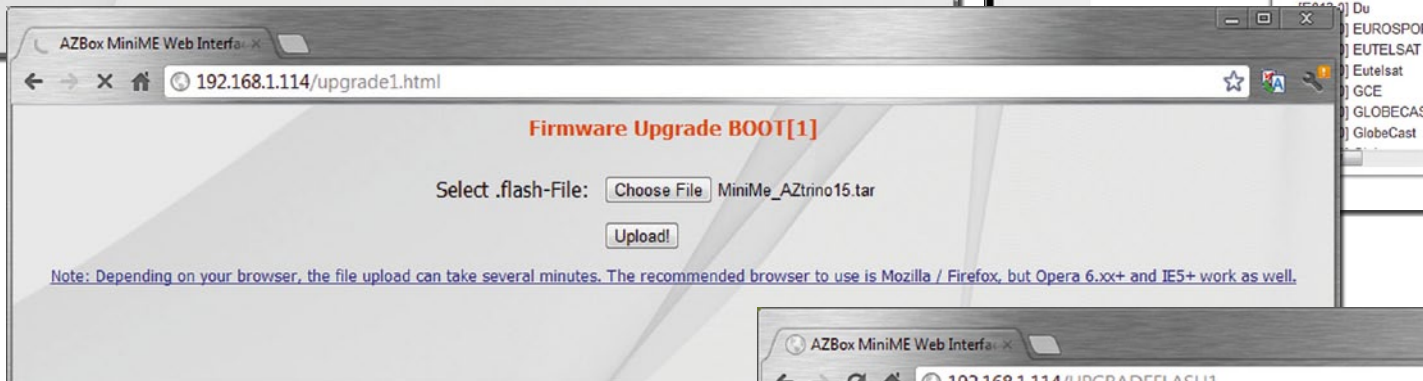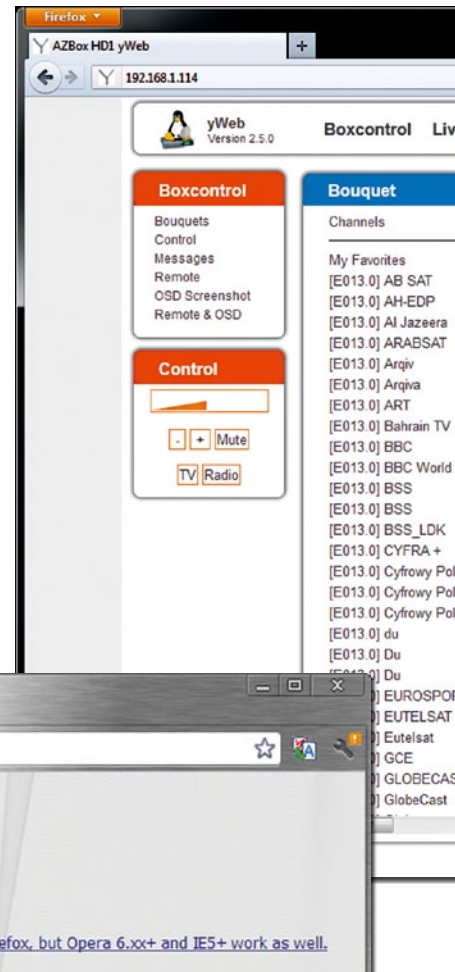



Expert Opinion



Vitor Martins Augusto
TELE-satellite
Test Center
Portugal

Small size
Loads of functionality
2 totally different firmware versions available
Blind scan
4:2:2 capability


No front-display

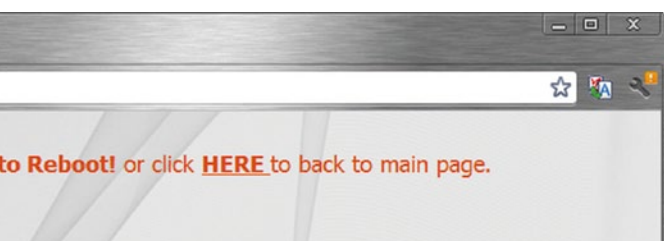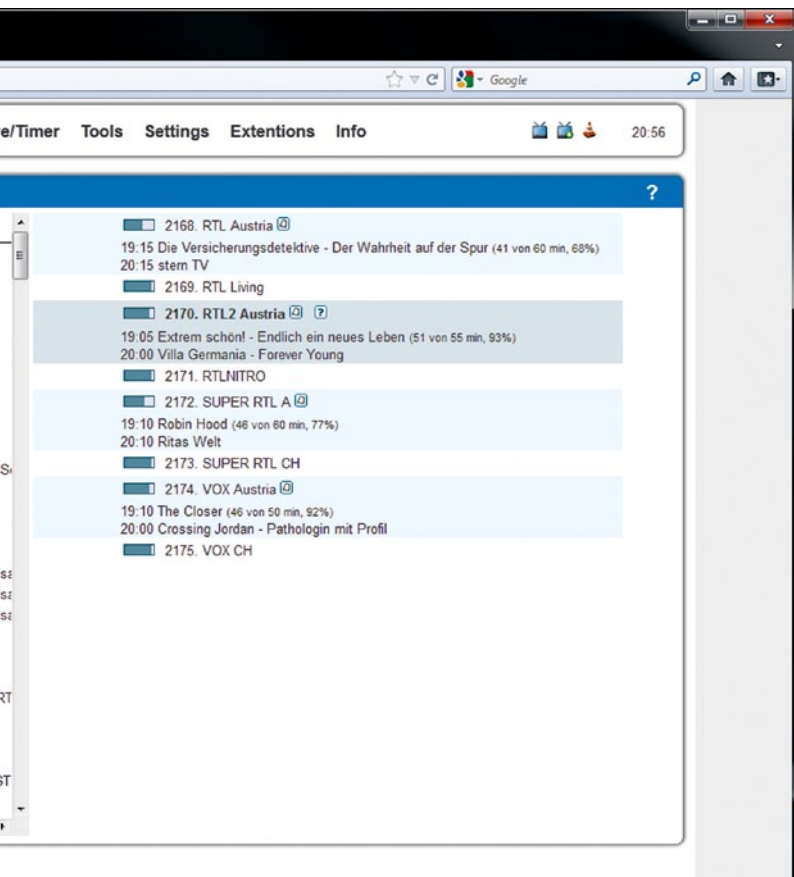

TECHNICAL DATA

Manufacturer	OpenSAT Ltd, Lagoa, 4950-283 Mazedo, Portugal
Website	www.azbox.com
E-Mail	info@azbox.com
Model	AZBox mini ME
Function	DVB-S / DVB-S2 Miniature HDTV Linux Receiver with Multimedia Features
Operating System	Linux
Processor (CPU)	SIGMA processor SMP 8653
Working Memory	DDR 128 MB
Video Memory	DDR 128 MB
Tuner	Single tuner (DVB-S or DVB-S2) embedded.
DiSEqC	1.0, 1.1, 1.2, 1.3, USALS
Flash Memory	256 MB
HDD	eSATA
Video Output	PAL / NTSC
Video Containers	MPEG1/2/4 (M1V, M2V, M4V); MPEG1/2 PS (M2P, MPG); MPEG2 Transport Stream (TS, TP, TRP, M2T, M2TS, MTS), VOB, AVI, ASF, WMV, IFO, ISO; Matroska (MKV), MOV (H.264), MP4, RMP4
Video Codec's	XVID SD/HD; MPEG-1; MPEG-2: MP@HL; MPEG-4.2: ASP@L5, 720p, 1-point GMC; WMV9: MP@HL; H.264: BP@L3; H.264: MP@L4.0; H.264: HP@L4.0; H.264: HP@L4.1; VC-1: MP@HL; VC-1: AP@L3
Audio Containers	AAC, M4A, MPEG audio (MP1, MP2, MP3, MPA), WAV, WMA, FLAC, OGG
Audio Codec's	AAC, AAC+, DTS, WMA, WMA Pro, MP1, MP2, MP3, LPCM, FLAC, Vorbis, DTS (Audio Pass-through)
Picture Support	JPEG, BMP, GIF
Subtitle Supported	SMI, SRT, TXT, SUB, SSA
Resolution	576i (480i), 576p, (480p), 720p, 1080i, 1080p
Ethernet	10/100 Base-T Ethernet (max.100Mbit/s)
Front I/O	Coloured Led's; Power Button; 1x IR Jack;
Rear I/O	1x HDMI; 1x JACK; 1x e-SATA; 1x RJ45; 1x Optical S/PDIF; Power Switch; 2x USB 2.0; 1x AV connector;

ENERGY DIAGRAM

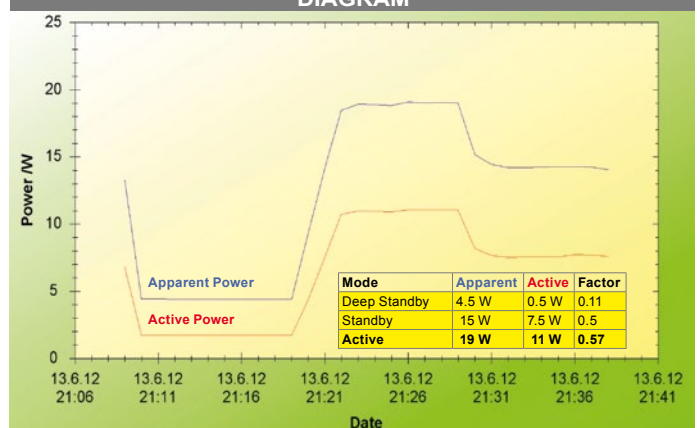

DEVISER DS2400T



DEVISER

- offers all measuring options a professional antenna installer needs
- among the highlights are MER measurements for each transponder, ground loop measurements and a remote measurement function
- excellent user interface and top-notch software features
- display with extremely high resolution, perfectly suitable for showing the spectrum and constellation diagrams
- one of the bonus features is long-term measurement of BER



Excellent Meter for Professionals in DVB-T, DVB-C and CATV (analog TV)



We received the DS2400T in a rather plain cardboard box that featured the prominent Deviser logo. Safely packed inside was a good-looking protective bag made of nylon which can be used for storing the signal meter. There is enough space for the device itself and the power pack, and the bag even sports an outside pocket on one side which comes very handy for accessories such as the measuring cable or some socket adapters.

Together with the meter and power pack you receive a special cable for hooking up the unit to a PC, as well as two 8cm mini CDs. One includes the driver software for the virtual serial interface that is used by the meter to establish a connection with the PC, while the second CD provides a PDF file with an English-language user manual and the DS2400 Toolbox software that is required to operate the meter directly from the PC. We'll dig a little deeper with regard to that option in a moment.

The signal meter is very compact in size and thus sits extremely comfortably in your hand. With the light blue colour so typical of Deviser products it not only feels good, but also looks rather unique. As far as weight is concerned it is



■ ECHO measurement with the new antenna.

■ Of course we put the DS2400T to a real-world test right away. Here we use it to align a new DVB-T antenna.

within the expected range and the rubber protection all around the DS2400T safeguards against damage when used outside and up on the roof.

While the HF input is placed on the back

panel of the device, USB input and power supply socket are located on the front panel. In addition, the front panel features a high-resolution TFT display and a total of 17 buttons below the screen. An

LED indicates the current status of the battery pack.

All buttons are self-explanatory and provide a pleasant pressure point with just the right amount of feedback you need. The first row of buttons consists of the F1, F2 and F3 function keys whose currently active function is shown on the bottom line of the display. In the second row there is the HOME button that always brings you back to the main menu in an instant, as well as the UP and DOWN buttons for navigating between menu items. Below this row comes the numeric pad that is set up just like on phones, which means that each number can also be used to type three different letters (much like texting), so that you can easily enter names as well, for example. The last row of buttons features



1. Main menu of the DS2400T with twelve different measurement modes.

2. Level measurement: Results are displayed as numerical values and as a bar chart. Seen here is an analog transponder with simultaneous measurement of video and audio levels. The level is below a predefined threshold, hence the FAIL indication of the automatic quality check.

3. Signal strength measurement of a DVB-C transponder. Here too, the result is displayed as a numerical value and a bar chart. In addition, the meter shows MER, PRE-BER and POST-BER parameters. The automatic quality check gives the PASS mark.

4. The constellation diagram is greatly helped by the high-resolution TFT display.

5. Long-term BER measurement: As the signal in our test center is too good, the antenna cable was plugged off for a split second. The meter reacted swiftly and reliably. Long-term measurements are great for detecting occasional faults at a client's system and for establishing a correlation with other events.

6. MER vs. carriers: This type of measurement is still not very common and shows the MER (Modulation Error Rate) of each carrier on a DVB-T transponder. This way it is possible to determine interference on individual carriers which results in occasional loss of video, even though the average MER looks fine. No other measurement is capable of identifying such problems.

7. The marker was moved to carrier no. 2155 in order to find out its specific MER. The DS2400T also offers a peak hold mode for such cases.

8. ECHO measurements are particularly important with SFN (Single Frequency Network) DVB-T networks, since a second time-delayed signal on the same frequency can easily cause reception problems. At our location, however, no echoes can be received even though we use a SFN.

9. The DS2400T is able to generate a very detailed spectrum. Seen here is the entire spectrum, with two markers available for measuring the signal level at two different positions and showing the difference between the two.

10. Speed is not the main point of this meter's spectrum, but this is not an issue for DVB-T, DVB-C and CATV – contrary to DVB-S. Small frequency spans offer much more help, as they can visualise even individual carriers (and their problems) of the transponder.

ALLEN²

NEW

FULL HD HYBRID SET-TOP BOX WITH DUAL LINUX OS



AVAILABLE VERSIONS:

TRIPLE TUNER

T1	T2	T3	
☒	☒	☒	DVB-S/S2
☒	☒	☒	DVB-T
☒	☒	☒	DVB-C

TWIN TUNER

T1	T2	T3	
☒	☒	☐	DVB-S/S2
☒	☒	☐	DVB-T
☒	☒	☐	DVB-C

HYBRIDTUNER
DVB-T+C



ONLINE
USER'S MANUAL

DIGITAL SET-TOP BOX

- ▶ Available in Triple Tuner Version with Terrestrial+Cable Hybrid Tuner
- ▶ Two Conax Embedded Card Readers
- ▶ Spark and E2 OS simultaneously stored on the same receiver with easy switching
- ▶ HbbTV - Interactive Television
- ▶ WebTV - Watch Internet Streaming TV on your Television
- ▶ Multimedia Playback (MKV, AVI, MPG, FLV, MOV, WMV and much more...)
- ▶ File Sharing via Local Network
- ▶ Wired and Wireless Network Connection Support
- ▶ USB 3G Internet Modem Compatible

AND MORE!

- ▶ Spark Portal - Bringing Popular Internet Applications to your Television's Screen
- ▶ Watch and Download your Favourite YouTube Videos
- ▶ SHOUTcast - Access Hundreds of Thousands Web Radios
- ▶ Opera Web Browser (with Flash Lite)
- ▶ USB Wireless Keyboard & Mouse Support
- ▶ Online Subtitle Downloads
- ▶ Multi-Language Spark Online User's Manual and F.A.Q. videos
- ▶ Expandable Possibilities with Plug-In support
- ▶ Continuous Software Development and easy-to use Online Upgrades



SPARK PORTAL



the main switch to turn the meter on and off, as well as the ZERO button and the status LED.

We should once again stress that we're talking about a professional signal meter

for antenna installers. Deviser is a major manufacturer for TV, CATV (analog TV), and satellite signal meters (for more information about Deviser please have a look at the company report in TELE-

satellite 06-07/2011), and as soon as you turn on the DS2400T for the first time you will notice that this is not a gadget for amateurs, but a top-notch tool for pros. It's ready to use after only a few seconds, there are no colourful animations, and loading times are impressively short. All that pops up on the display is the model name DS2400T, followed after a short moment by the main menu. And what a main menu it is: No less than twelve different measurement modes are available, as well as dedicated menus for configuration and file management. The sheer number of distinct measurement options leaves no doubt that Deviser is very serious about its new DS2400T meter.

To give you an impression of the power hidden inside this neat device we'll look at all twelve modes below:

Signal level/signal strength

The DS2400T makes a difference between analog and digital signals. For analog signals the meter shows numeric values for video and audio levels, as well as bars. The corresponding distance – commonly referred to as V/A ratio or video/audio ratio – is also indicated. This shows that Deviser has professional installers in mind, many of whom set up large-scale distribution systems in apartment buildings or hotels and who can see at a glance whether or not signal levels

11. Tilt measurements are required for the correct adjustment of signal amplifiers in cable networks, for example. The aim is to achieve similar signal levels for all channels.

12. With the DS2400T it is possible to select up to eight channels of the channel list for tilt measurement.

13. Bar search: Blue bars indicate digital channels, green/yellow bars indicate analog channels, with green showing the video level and yellow showing the corresponding audio level.

14. Ground loop measurement: Ground loops are caused within the power grid and interfere with analog channels. Depending on the power supply in place the meter can be set at 50Hz or 60Hz.

15. Result of threshold measurement: All pre-defined channels are measured and the result is then presented in a chart. If preferred, a graphic presentation of the result is possible as well.



16. Measurement of carrier/noise ratio: Again, this is relevant for analog channels. The DS2400T even shows the total bandwidth of the channels as a useful bonus.

17. Return channel: The spectrum shows the frequency range from 5MHz to 45MHz or – if required – 65MHz.

18. Configuration menu with user-friendly grouping of various parameters.

19. Information about the meter: Note that the most recent calibration date can also be called up at any time.




20. Users can set a period of inactivity, after which the meter automatically switches off in order to save valuable battery life.

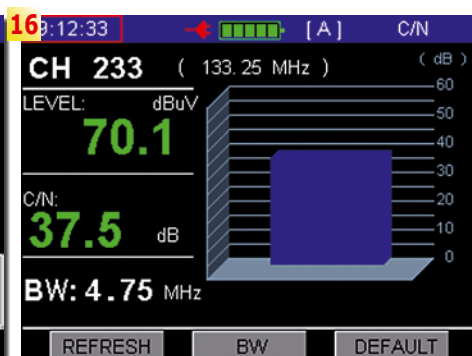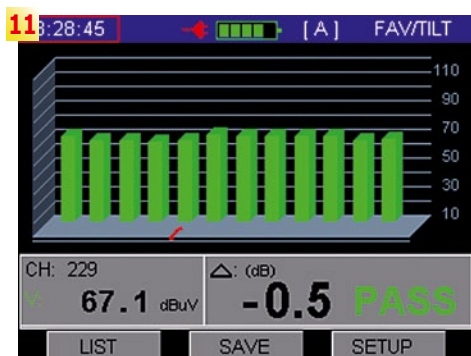

12: 8:37:09 [A] FAV/TILT
TILT CHANNELS

CHN	TYPE	FREQ	TILT
233	227	18	DIGI 754.00
232	226	250	DIGI 233.50
231	225	249	DIGI 240.50
230	224	233	DIGI 247.50
229	223	248	DIGI 410.00
228	222	247	DIGI 434.00
		246	DIGI 450.00


ENTER

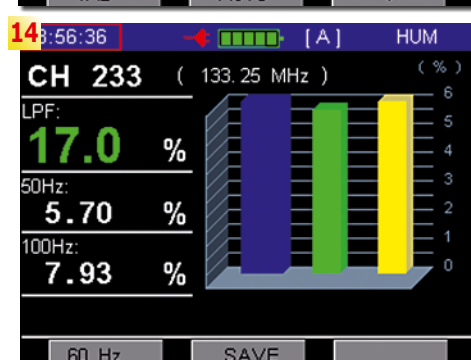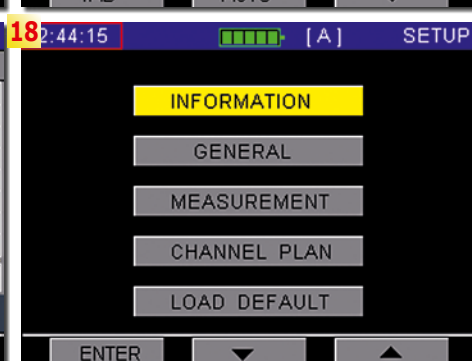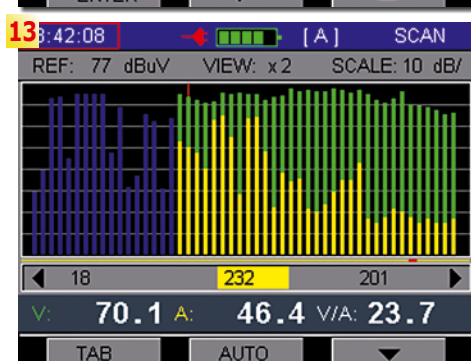

15: 9:09:17 [A] LIMIT

MIN VIDEO:	MAX VIDEO:	MAX VID:	MIN V/A:	MAX V/A:	MAX VID DEV:
CH220	74.0 dBuV	✓	CH202	61.8 dBuV	✓
CH207	72.4 dBuV	✗	CH206	66.5 dBuV	✗

LIST GRAPH

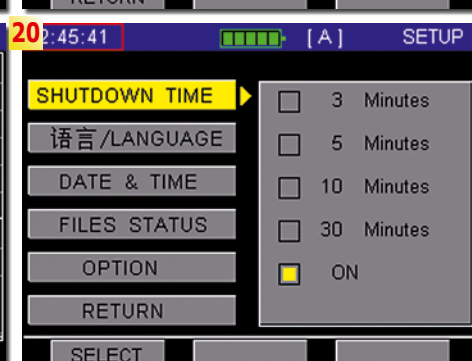

are OK. The DS2400T offers an automatic signal quality check that either shows PASS or FAIL, depending on whether or not the measured signal reaches a pre-defined threshold level.

If it's a digital signal you're analysing the display content changes and the signal strength is shown with numeric values and bars together with MER, PRE-BER and POST-BER parameters. Once again the built-in signal quality check will indicate PASS or FAIL, thus showing installers right away whether or not the signal in question is all right. Using the arrow buttons it is possible to navigate up and down the channel list, with the meter reacting very swiftly to new channels and displaying all corresponding signal data without significant delay. This is what we call true value for money, and what the DS2400T offers is much better than just PASS, it's closer to pass with distinction!

Constellation

If your digital signal is error-prone and you need to find the root cause a constellation diagram can work wonders. If it turns out that signals are not located in the correct square field you get BIT errors. By looking at the concentration of dots within the cloud of dots in a constellation diagram you can find out how stable your reception is. If each square field comes with a relatively small and concise cloud of dots there's nothing in the way of reliable reception. If the cloud covers a large and more or less uncontained area some dots may wander off into a wrong square field and impair the overall signal quality. Together with the constellation diagram the DS2400T also shows signal strength, MER, PRE-BER and POST-BER values, thanks to the high-resolution TFT display with its 320x200 pixels. It's not only brilliant to read but also allows packing in a great deal of information and useful details without putting at risk usability.

BER measurement

BER measurement is used to find out the bit error rate, or in other words: how many faulty bits are received. There are a number of different DVB standards in place all around the world, and each comes with its own distinctive automatic error correction regime, which is called VITERBI. This correction routine makes sure that bit errors up to a certain threshold can be corrected without generating a faulty TV image. The threshold of bit errors lies between 10⁻⁵ and 10⁻⁷, depending on the DVB standard used. This means that one incorrect bit for every 10,000 to 1,000,000 correct bits will












■ Thanks to a metal strap the meter can easily be fixed to equipment, so that both of your hands are free for installation jobs.



be fine. Because of automatic VITERBI error correction BER measurements are frequently performed as two separate measurements: The first result shows bit

errors before automatic correction (PRE-BER), the second result indicates bit errors after correction (POST-BER).

At first I was not entirely sure why there are separate menu items for BER and MER measurements, as both parameters are also shown in the measure-

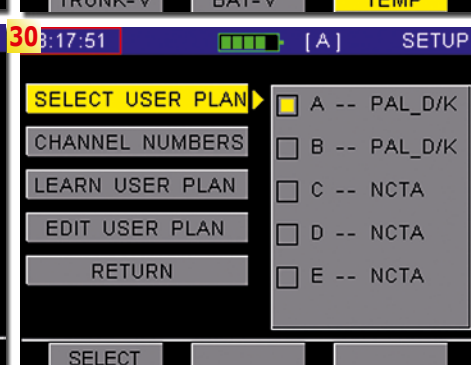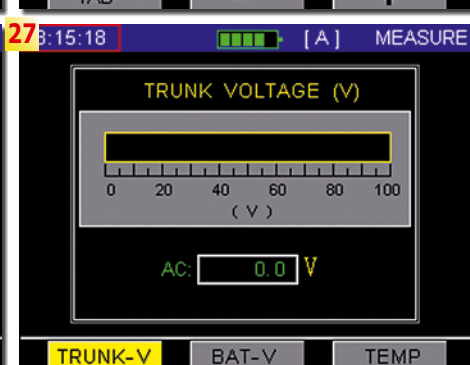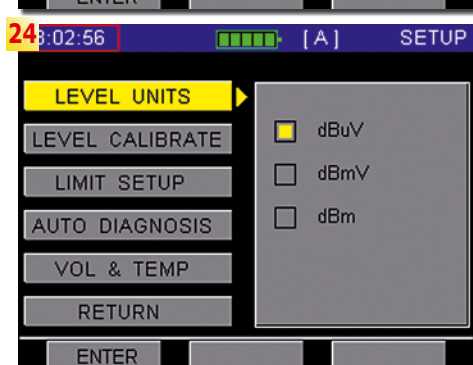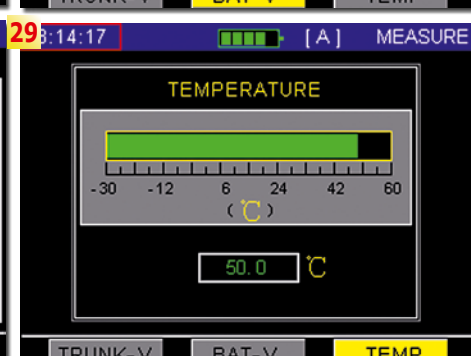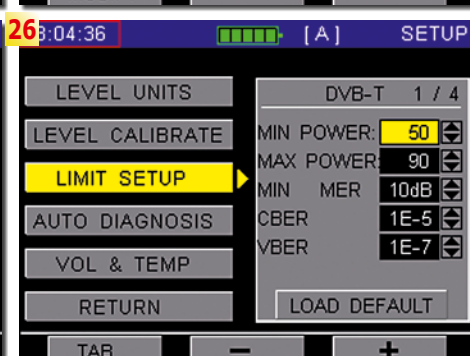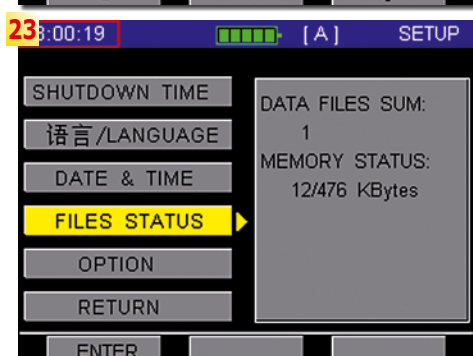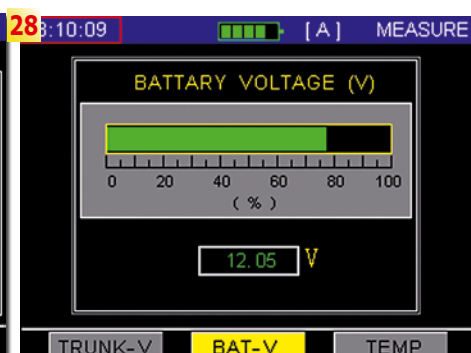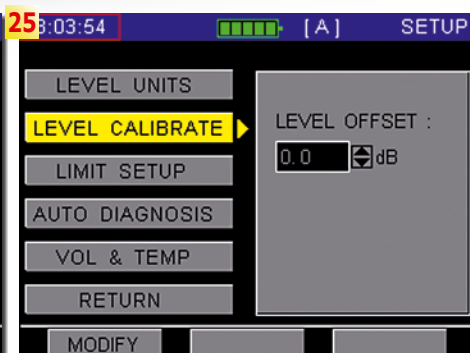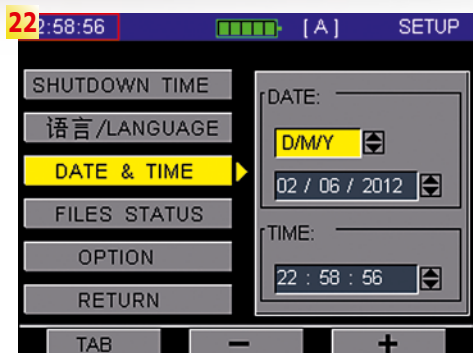

ment modes we already looked at. When I called up MER measurement, however, I was simply at awe: At long last a manufacturer has come up with a convenient hand-held device that is able to perform long-term measurements which can actually be put to use by professionals. With the DS2400T users can define a period from one minute to several days during which the meter will collect all relevant data and then present the results in a way that is nothing short of extraordinary. The sheer amount of data does not compromise usability at all. What's more, there is no need to connect the meter to a PC for long-term measurements. Installers can use this feature to even detect occasional image faults, something that is of enormous value and can only be found in professional equipment.


M-GRAM measurement

And that's not all: It may sound too good to be true but the DS2400T is capable of measuring the MER (modulation error ratio) of individual carriers. Such a measurement is often referred to as 'MER versus carriers' and is particularly

important for DVB-T. While most meters only measure MER as the average across all active carriers, only very few can give separate results for each carrier of a DVB-T transponder. Why is this so important? In some scenarios a neighbouring analog transmitter might interfere with some – but not all – carriers of a digital transponder, since analog transmitters broadcast three relatively small frequency spaces for video, audio and colour. In such a case the average MER value may well look OK, even though reception is not possible because some carriers experience massive interference while the majority of carriers boast an excellent signal. Conventional measurements cannot identify such a problem, and you really require professional equipment such as the DS2400T to get to the heart of the matter. All you need to do is position a marker above individual carriers to find out the corresponding results of the MER measurement. Moreover, MER measurements have a peak hold function, which means the current MER value is shown in yellow, while the peak value is drawn with red colour. Too good to be true? Yes, but that's what you should get used to with this meter.

Echo measurement

Again, this is a measurement that is particularly helpful for DVB-T signal analysis. A number of countries (including Portugal, our test location for this report) have opted to implement DVB-T as SFN (Single Frequency Network). The advantage of such an approach is that all broadcast cells use the same frequency so that reception equipment can have the same channel list irrespective of where it is used. Mobile reception benefits greatly, since you never need to perform a channel search while moving around within a country's borders. On the other hand, all that glitters is not gold since single frequency networks cause different lag times in cases when a receiver is operated between two cells. In such a case two slightly time-delayed signals with the same frequency reach the receiver and cause interference that is called echo. DVB-T comes with an integrated correction mechanism that filters echoes up to a certain distance. That distance is referred to GUARD INTERVAL and echoes that are produced within the guard interval do not cause image interference, while echoes exceeding the guard interval will result in visible interference.

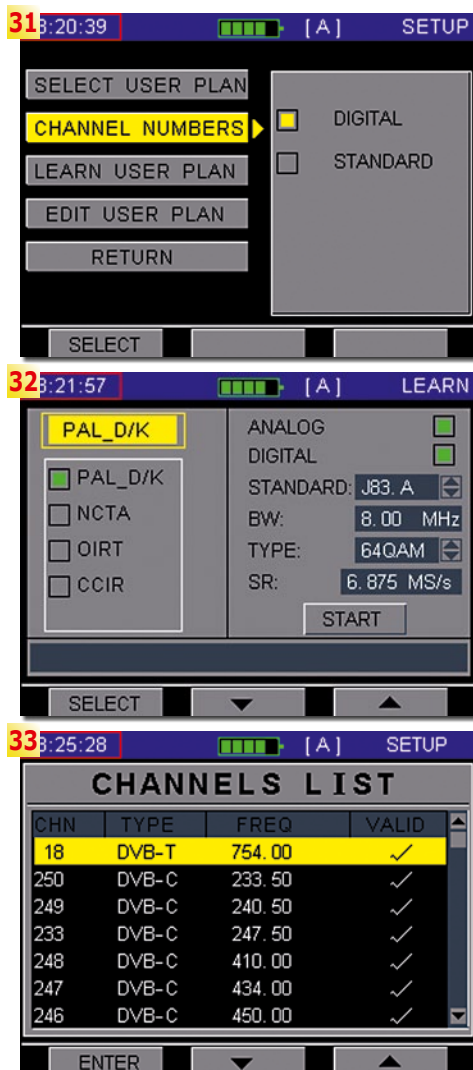

21. Language selection: English, Dutch, Turkish, Chinese
22. The DS2400T comes with an integrated clock that can be used to add a timestamp to each measurement.
23. Deviser has equipped the DS2400T with enough memory capacity to also deal with large-scale installations without the need for a PC.
24. Measuring units can be adjusted to meet personal requirements.
25. The DS2400T even allows user calibration, to make sure different meters used within a company all give out the same measurement results, for example.
26. Separate threshold values can be defined for DVB-T, CATV and DVB-C, which

then flow into the automatic quality check.

29. The DS2400T comes with a built-in voltage checker which can measure the voltage arriving at the HF input.

30. What's more, the current voltage of the internal battery pack can also be checked.

31. And for the curious among you, it is even possible to find out the inside temperature of the meter.

32. A number of different channel lists are pre-stored in the meter.

33. Each channel list can include both analog and digital channels. If you only want to measure analog or digital channels there is no need to set up additional channel lists. This is the menu item for channel list configuration/editing.



The DS2400T shines once again, delivering excellent ECHO measurements which are shown as a graphic as well as listed in a chart which also includes the signal strength and distance to cell given in km. Based on this information installers are able to optimise the alignment of the antenna.

Spectrum analyzer

Obviously the DS2400T comes with a spectrum analyzer function as well. Thanks to the high-resolution TFT display the spectrum is shown with great detail, something that is not usually the case with handheld meters. Frequency spans can be set in pre-defined steps of 2.5MHz, 6.25MHz, 12.5MHz, 25MHz and 62.5MHz or Full Band. These options alone speak volumes about Deviser's target group, namely professional installers. It's the small steps that come to the fore, as they are required to look at individual carriers of digital transponders. The vast amount of analysis that is

involved causes the spectrum build-up to be on the slow side, but it is quite evident that the DS2400T spectrum analyzer is not for real-time antenna alignment, but much rather for detecting even the slightest interference. We also appreciated the option of freely positioning two markers anywhere in the spectrum in order to measure the C/N ratio.

Tilt measurement


For this measurement up to eight channels from the channel list are selected. They are then analysed and the results are presented as a bar graph.

1. The Toolbox software for the DS2400T meter has a modern look and feel, and offers a user-friendly structure. Even though the product is shipped with a comprehensive user manual written in brilliant English you will most probably find out everything you need to know without it. A number of measurements can be performed directly on the PC in real time if you connect the DS2400T with the supplied adapter cable. In this example the selected frequency is measured continuously.
2. The spectrum can be displayed directly on the PC as well. This makes the DS2400T a perfect fit for remote monitoring of a system thanks to Windows Remote Desktop Protocol.
3. Bar search with digital and analog channels. The audio level of analog channels is shown in yellow.
4. Tilt measurement: Easy to use and fast – right from the PC. There even is an interpolated line giving an indication of tilt!


Among other things, this measurement can be used to set up antenna amplifiers, for example, so that all channels are distributed with the same signal level. We were truly impressed by the fact that you can perform a tilt measurement for up to eight channels with the DS2400T.

Bar search

This is another very popular measurement option that is useful for cable networks. Instead of measuring the entire spectrum only the channels on the channel list are evaluated and the individual results are shown as a bar graph in

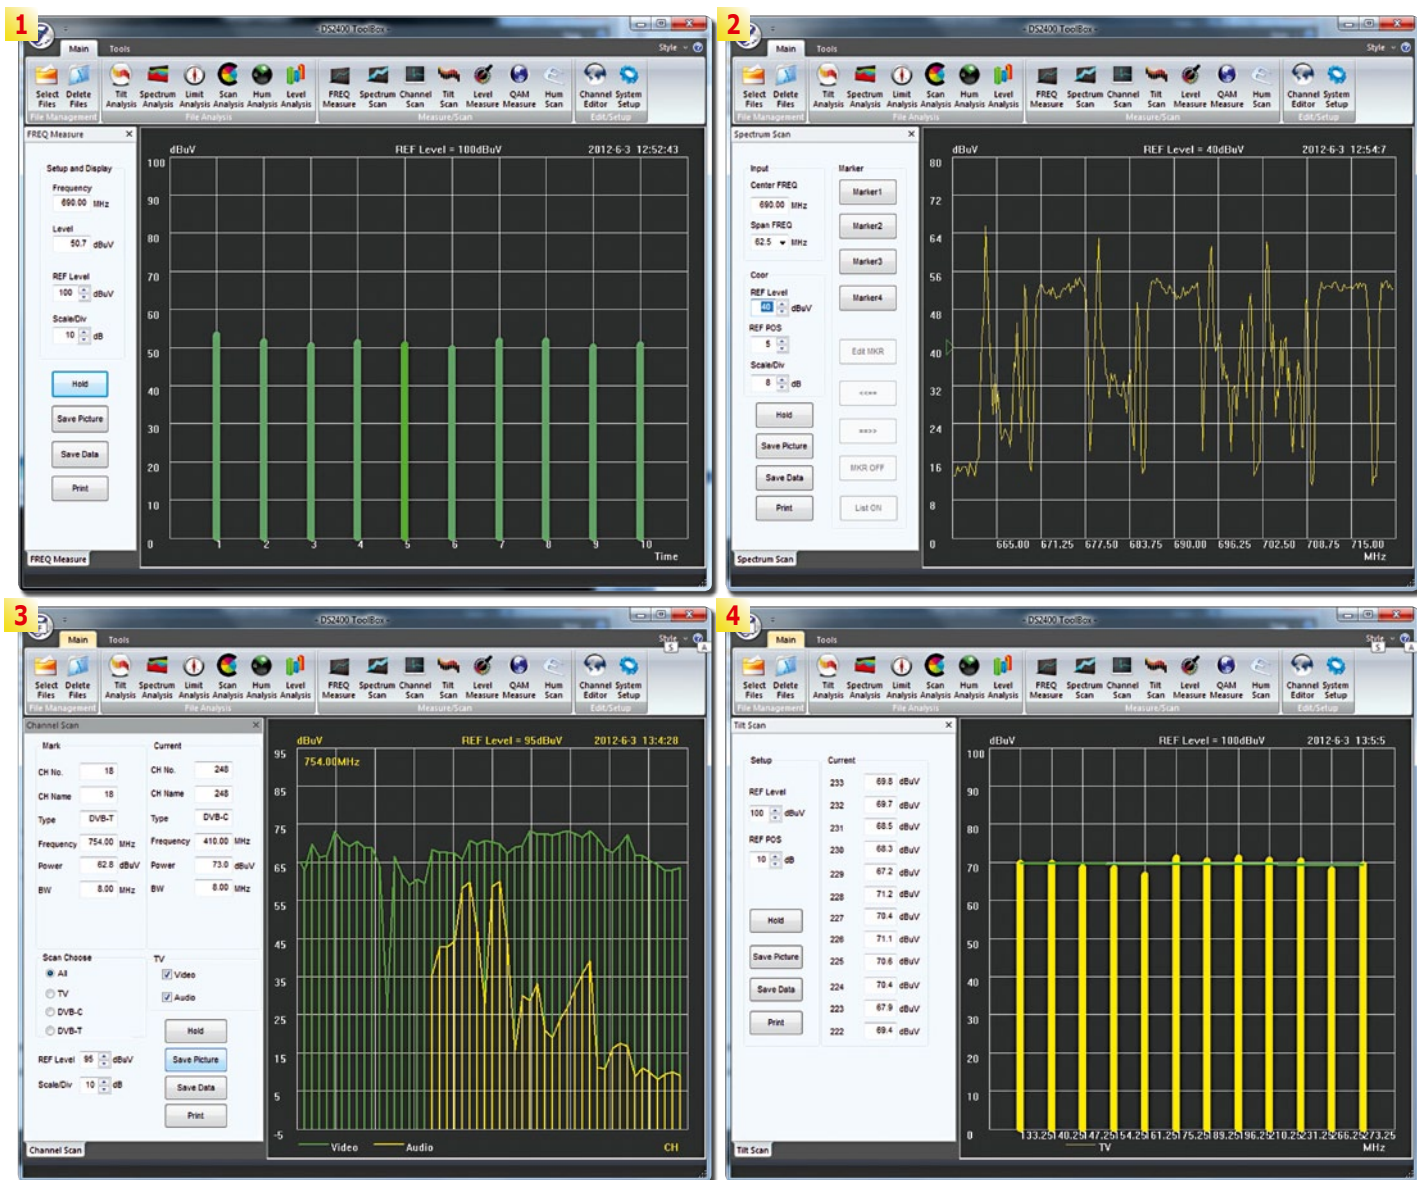

Hybrid OTT BOX+DVB-S2/T2/C

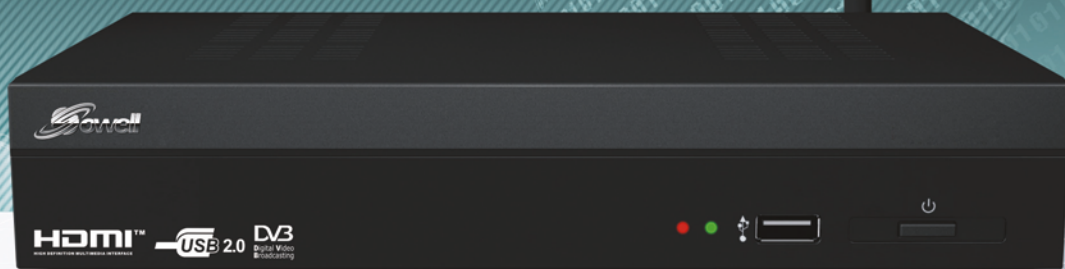

- IPTV
- Movie Online
- Web Browser (Optional)
- USB Mouse, Keyboard
- Fully MPEG-2 / MPEG-4 (H.264 / VC-1) and DVB-S/DVB-S2 Compliant
- Network Application (Youtube, Podcast, Yahoo, Picasa, Flickr etc.)
- Multi-media Player (TS, MKV, AVI, VOB etc.,)
- DLNA
- WiFi
- Recording & Playback with External Storage Devices(e-SATA / USB2.0 / HDD)
- Firmware Upgrade (USB / Online / OTA)
- VOD
- Conax CAS7.0 (Optional)
- 2 USB

HD DVB-S2



- Fully MPEG-2/MPEG-4(H.264/VC-1) and DVB-S/DVB-S2 Compliant
- Multi-media Function (Playback TS, MKV, AVI, VOB etc.)
- Record & Playback with External Storage Devices (USB Stick/HDD)
- Support HDMI output (up to 1080i)
- Conax CAS7.0 Embedded (Optional)
- One Common Interface(CI) (Optional)
- Ethernet
- Support OTA (Optional)
- WiFi (Optional)
- 2 USB

HD DVB-T



- Fully DVB-T/MPEG-2/MPEG-4/H.264 Compliant
- PVR Recording (Viewing one channel and Recording another channel Simultaneously)
- Multi-media Function (Playback TS, MKV, AVI, VOB etc.)
- Record TV and playback with External Storage Devices (USB stick/HDD)
- Advanced Time-shift function
- Format Resolution: 1080i, 720p, 576p
- OTA (Optional)



You can meet us at the above shows in 2012.

real time. Here again the PASS or FAIL indication provides an automatic quality check at a single glance. The bar search implementation leaves nothing to be desired and adds additional appeal to the DS2400T. We arranged the channel list in a way that listed digital channels (blue colour) first, followed by analog chan-

nels, for which the video level is shown in green and the audio level in yellow. If you need to find out detailed results for individual channels you can once again use a marker to point to the bar you're looking for.

HUM/ground-loop

This measurement was an absolute first for me, one that I have never come across in a signal meter before. It can be used to measure the impact of an electric ground loop – which is caused by the power grid – on analog TV channels. For



a meaningful result you first have to select whether your power supply runs with 50Hz or 60Hz.

Threshold measurement

You've read it before, but once again the DS2400T comes with a powerful measurement option that does not have many peers. Installers often have to obtain a quick overview of all channels distributed in a cable network. For analog channels, Deviser has implemented a neat routine that automatically measures all available channels and then provides detailed information on channels with video or audio levels below a set threshold. The process resembles the bar search, and here too the results are shown with a bar graph. When the measurement is completed the final results are shown on the display, complete with minimum and maximum signal levels and signal ratio.

Carrier/noise ratio

Frequently called C/N measurement, this function determines the ratio between carrier and noise, or in other words: the signal level in relation to background noise. Sufficient separation of the two is paramount for flawless video. Obviously this measurement applies to analog signals only, but Deviser once again demonstrates attention to detail since you can only select analog channels of the channel list for this measurement in the first place.

Return channel

The last measurement option should be selected to evaluate the return channel in cable networks. The 5MHz to 45MHz or 5MHz to 65MHz spectrums are active for this type of measurement.

Configuration options

No installation job is the same as the one before, so luckily this meter offers a range of customisation options in the system configuration menu:

Information about the DS2400T

Here you cannot only access software and hardware version numbers, but also the calibration date. This piece of information is particularly important for contract jobs performed by certified installation companies, which have to be able to prove calibration of their devices on request. This goes to show yet again that Deviser has designed a meter that targets the professional market in a convincing way.

Generic configuration settings

Use this menu item to define a time limit for automatic switch-off, for exam-

ple, which can help save valuable battery capacity. Plus it is possible to adjust additional important parameters such as OSD language, among other things. The meter we received for our test offered English, Dutch, Turkish and Chinese. If you need to find out the status of the internal memory you can also look it up here.

Configuration of measurements

By default, signal level and strength are measured in dBµV, but you can also change that to dBmV or dBm, which does make sense when evaluating digital signals, since dBµV is only used for better comparison with analog signals in digital modulations. The DS2400T from Deviser comes fully calibrated, yet installers have the option of manually calibrating the meter for individual measurements. This way it is possible to calibrate several meters of the same installer in a way that makes sure all devices show exactly the same signal level of a reference signal. Alternatively, it is of course also possible to calibrate the DS2400T against a reference meter, if one is available. We believe this is an impressive feature that will be appreciated by many professionals.

Using the LIMIT SETUP menu item it is possible to define minimum and maximum values for measurements, as well as a threshold level for the automatic quality check. All these parameters can be set individually for DVB-T, analog TV and DVB-C. What's more, the DS2400T comes with an integrated auto diagnose mode which is run every time the meter is turned on.

The VOL & TEMP menu item hides another interesting feature: Use it to measure the voltage of the signal arriving at the HF input. This way it is possible to check the power supply for all active components in a cable installation, or to find out if undesired voltage exists due to faulty connection boxes or bad insulation. The same screen mode can be used to call up the current voltage of the internal power pack. We were surprised that – in addition to all options mentioned above – it is even possible to find out the meter's internal temperature. In our opinion this is not only quite unusual, but also very useful.

Channel lists

Deviser ships its DS2400T signal meter with a number of pre-stored channel lists which can be edited directly on the meter or – more conveniently – on the PC using the supplied Toolbox software. In each individual channel list it is possible to activate analog channels only, digital channels only, or both types. This means there is no need for installers to set up different channel lists for differ-

ent broadcasting types. It goes without saying that the DS2400T sports an automatic channel search which can be defined with parameters such as analog/digital or all channels. Digital channels are displayed complete with DVB norm, bandwidth, modulation and symbol rate. In our test the meter turned out to be a quick performer, and it also found all channels carried in our cable network. The search result is presented in an easy-to-use chart. In addition, there is an integrated file manager which can be used to call up stored measurements or to delete files that are no longer required in order to free up memory.

Factory reset

Not that we like to find ourselves in such a situation, but if worse comes to worst you can always reset all parameters to their default values. This option is available in most signal meters tested by us, and is indeed a must-have feature.

File manager

The DS2400T comes with a USB adapter cable and a CD ROM, on which you can find a PDF file with a very detailed user manual. Even though it is only available in English it is perfectly written and therefore an enormous help for discovering all nooks and crannies of this meter.

The main reason for me to install the software was so that I was able to adjust the channel list to the offering of my cable provider. And this was actually the first time I encountered problems in connection with the DS2400T. My test computer was running a 32bit version of Windows7 for compatibility reasons, the second CD Rom entitled DRIVERS that is shipped with the device however only includes a software version for 64bit versions of the Windows7 operating software, which meant that the DS2400T was not detected automatically. After looking at all my options I finally decided to install the existing drivers in the 64bit directory and give the whole installation another go. Miraculously, this worked on my 32bit operating software.

I tried the setup on a second PC with the 64bit version of Windows7 and – as expected – the driver was installed without any hassle whatsoever. However, I was faced with another problem: The driver that comes with the DS2400T installs a COM interface, which means the meter is connected to the PC through a virtual RS-232 interface. In theory, this is a worthwhile strategy, but these days PCs and laptops support Bluetooth and other communication devices so that COM ports 1 to 10 are frequently used for those devices and are not available for the meter. While you can select the COM port of the DS2400T with the

Toolbox software, you can only choose between ports 1 to 10. I had to call up the Windows driver manager in order to change the COM ports so that in the end COM1 was available and my PC was finally able to detect the DS2400T.

I could hardly wait for the software to start and when it finally appeared on my monitor I was almost lost for words by looking at the endless range of options it offered. It happens so often in life that we think 'too little, too late', but with the Toolbox software Deviser has come up with the exact opposite and 'too much, too soon' almost sprang to mind. Then again, 'too much' never gives us reason to complain! It's not only possible to edit channel lists and load measurements that were performed with the DS2400T, you can even make measurements directly with the software and an attached DS2400T. Take a deep breath and find out which measurements we're talking about:

- Frequency measurement
- Spectrum analysis
- Bar search
- Tilt
- Level/strength
- QAM
- Ground loop

One reason I was positively surprised by this option was that it would be possible to use RDP (Remote Desktop Proto-

col) to remotely diagnose an installation via the Internet. This way it is possible to permanently monitor a broadcast cell or head end, for example, from an operations centre. In general, one would use dedicated rack hardware for such a purpose, but it's great to know the small DS2400T handheld meter from Deviser can be used just as well, if need be.

Furthermore, the DS2400T Toolbox software allows downloading measurements from the device to the computer and then graphically enhancing and saving them onto the PC for creating sophisticated documentation for your measurements. The built-in channel list editor is very easy to use and we were able to set up customised channels lists without consulting the user manual.

It goes without saying that all configuration parameters of the meter can be adjusted with the help of the DS2400T Toolbox software and for those looking for another extra special treat you can even load the current display content of the meter onto the PC. Here we finally discovered a small flaw which proved that our hunting instinct was still intact: Whenever we tried to download the current display content we were met with an error message indicating that the picture could not be saved. We tried it on two different PCs but the result stayed the same. To be honest, I didn't have a clue

as to what was wrong, but at one stage I came up with the idea of running the software as administrator with all permissions associated with that. Et voilà, all screenshots were transmitted to the PC without even the slightest problem. The reason for this detour is as follows: The Toolbox software attempts to save all pictures to the installation directory, and this is where Windows7 has some objections, since this is a directory that requires administrator permissions. No matter how hard I tried, I could not succeed in trying to convince the software to access another user directory, so the only thing I could do was change the permissions of the installation directory so that – in addition to the administrator – all users would have write privileges as well. Not the most efficient solution, but at least one that worked nicely for us.

Side-by-side comparison with our reference meter

No signal meter leaves our test center without being subjected to a side-by-side comparison with our in-house reference meter. The values indicated by the DS2400T did not differ significantly from our reference values. The chart below shows the results for the DVB-C transponder at 690MHz, which is a popular transponder of the TV CABO/ZON cable



System	Level (dBmV)	MER	Pre-BER	Post-BER
DS2400T	59.5	35.6	<1E-9	<1E-9
Reference	57.5	34.0	<1E-9	<1E-9

■ Table 1.

Compact Headend 8 / 16 x DVB-S(2) into QAM BluBox 8 and BluBox 16

- 8 / 16 x DVB-S(2) (QPSK/8PSK) into DVB-C (QAM)
- For the reception of 60/120 TV programs SD/HD and 30/60 Radio programs
- Compact dimensions and high energy efficiency
- LNB control with 14/18 V + 22 kHz or DiSEqC
- Configuration via LAN/IP
- Complete processing of the transport streams possible
- All 8 / 16 output channels can be placed individually in the spectrum
- Two individual input ports



NEW



SAT-HD-ANALYZER

SPAROS SAT HD

- High quality and bright display (4.3 inch)
- MPEG4-display and measuring
- SCR single cable switching commands according to EN 50494
- DiSEqC control
- Spectrum analysis
- Robust, impact-resistant housing
- Splash-resistant keypad



Optical Transmitter

SOTx 1310607 NF

- Frequency range of 47 ... 2200 MHz
- Laser output power: +6 dBm
- Quattro- and QUAD-LNB support

Optical Receiver

SORx 1310607 NF and SORx 1310607/1 NF

- 4-way / 1-way receiver in a compact housing
- Remote powerable through one coaxial output

network in Portugal, as it is available free-to-air.

Everyday use

No test report is complete without finding out what a device is worth in the real world. Coincidentally, analog terrestrial broadcasting was switched off in April in Portugal and our test center was still without a DVB-T antenna. So using the DS2400T for aligning our rooftop antenna was the logical choice. To be frank, I can cut this long story very short because with a top-notch signal meter like that all I had to do was enter the required channel (754 MHz, irrespective of the location in Portugal thanks to

a Single Frequency Network DVB-T system) and in less than one minute the antenna was perfectly aligned.

Ironically, this brilliant result even caused some problems for my real-world test – how can you possibly show screenshots of MER and BER measurements when there are virtually no errors in the signal? All you get is a line hovering around the zero value. In the end I had to use my good old stub antenna again, not for achieving brilliant reception but for receiving a less than perfect signal for test purposes. In addition, I used the DS2400T for measuring all antenna sockets in my house and even detected

a faulty antenna cable that had caused noise with some channels.

Conclusion

I am absolutely convinced by this meter and can recommend it without reservation. It's a small, lightweight device that still offers all options a professional installer will ever need for DVB-T, DVB-C and CATV. The range of features and measurement functions is truly unique and will help you detect potential flaws quickly and reliably. But you don't need to be on the hunt for problems in order to fully appreciate the capabilities of the DS2400T. Routine installation jobs become child's play too and thanks to the supplied Toolbox software it is even possible to draw up comprehensive documentation or to monitor a reception system in real time. This can also be done remotely via the Internet with the help of Remote Desktop Protocol. While the meter itself is awe-inspiring, it's also the small additional things

that propel the DS2400T right to the top of our pick list: The battery pack supports mobile use for hours on end, and the supplied charging unit replenishes the battery in as little as two to three hours. We used this handheld on and off for about three weeks and not once did we experience any malfunction. It just worked as advertised. To be honest, it exceeded our expectations by far. We'd be hard pressed to come up with some criticism, and the only thing we were missing was watching the TV channel on the meter's display. But let's be honest, this is a feature that professional installers simply don't require and Deviser has stayed true to its motto for the DS2400T: A top-notch and feature-rich meter for professional use, delivering accurate measurement results rather than useless gadgets and eye-candy.

This is exactly what the DS2400T is all about. We can wholeheartedly recommend this meter for all DVB-T, DVB-C and CATV jobs.

TECHNICAL DATA

Manufacturer	Tianjin Deviser Electronics Instrument Co., Ltd.
Fax	+86-22-27645002
E-mail	overseasbiz@deviser.com.cn
Website	www.devisertek.com
Model	DS2400T
Function	Professional Meter for DVB-T, DVB-C and CATV (analog TV)
Frequency Range	5 ~ 1000 MHz
Function	Power, MER, CBER, VBER, ECHOES and MER Versus Carriers
DVB-T Signal Parameters	
Carriers	2 k / 8 k (Set by user)
Guard Interval	1/4 1/8 1/16 1/32 (Set by user)
Code Rate	1/2 2/3 3/4 5/6 7/8
Modulation	QPSK 16QAM 64QAM
Spectral Inversion	Automatic
Channel Power	
Range	30 ~ 100 dBμV
Accuracy	±2.0 dB
MER	
Range	~30 dB
Accuracy	±2.0 dB
BER	CBER, VBER
ECHOES Analysis	
Range	0 ~ 112 us (2 k) 0 ~ 448 us (8 k)
Marker	50 Echoes List
Power Supply	
Battery	11.1 V 1.6 AH Lithium Battery (Chargeable)
Charger	AC 100 V to 240 V 50-60 Hz
Working Time	5 Hours (Fully Charged)
Charge Time	~ 3 Hours
Others	
Serial Port	RS 232 C
Operating Temperature	0 ? ~ 50 ?
Dimension	218 mm × 95 mm × 49 mm
Weight	700 g
Display	320 × 240 TFT

Experte Opinion

Amazing measuring possibilities with high accuracy
Includes special DVB-T measurements like ECHO or MER vs Carrier
Easy to use
Long battery autonomy
Rugged casing
Long-time measurements
Possibility to remote control meter through PC



Vitor Martins Augusto
TELE-satellite
Test Center
Portugal

— saving screenshots only in Administrator mode

MORE ABOUT THIS COMPANY

www.TELE-satellite.com/TELE-satellite-1107/eng/deviser.pdf

COMPANY REPORT
Signal Analyzer Manufacturer DEVISER, China

DEVISER

New on the Scene: DEVISER

- Starting off with two satellite signal analyzers
- Over 20 years experience as a signal analyzer manufacturer
- Fabrication soon to be in a new building
- Their own R&D Team with highly qualified engineers
- Operates with all of the corresponding quality standards

ANDROID PLUS LINUX

DUAL SYSTEM IP STB



S1-44HD

Android+Linux Dual OS IP STB

- Fully compliant with DVB-S and DVB-S2 (MPEG 2/ MPEG 4 / H.264)
- Common Interface available and Smart card slot for embedded Conax CAS
- LINUX for digital TV reception and ANDROID for IPTV, DUAL OS/DUAL Boot
- Up to three USB 2.0 available for media playing, software update and PVR
- Built-in WIFI modem and support external WIFI adaptor and 3G adaptor
- Auto-Timeshift supported with external hard drive disc
- Real PIP function supported (2 HD channels or 4 SD channels playing at the same time)
- File system supported: FAT, FAT32, NTFS, Ext2, Ext3
- Divx Plus @ supported
- DLNA supported

LED TV | 3D TV Google TV



Digital Combo Signal Meter

- DVB-S2, DVB-T2/T and DVB-C signal meter in one
- High performance spectrum analyzer to display the signal strength of all transponders
- Pre-/ Post-BER and MER indicator, C/N in the dB and signal level in dB/μV
- Constellation analyzer
- Screenshot Function (Capturing): screens with data can be in BMP format on a USB-stick
- Super ECO system management for power saving, auto-standby function supported
- Multi-lingual OSD menu supported
- Weight: 480 grams
- Dimensions: (W*H*D) 105*170*45 mm



The Global Invacom System

- **loss-less distribution system for satellite signals**
- **each outlets gets the original satellite signal**
- **distributes both bands and both polarizations in one cable**
- **easy to build system due to smart connectors**
- **cable length not critical to performance**



The Battle Is Over and Fiber Has Won

The carrier-to-noise ratio is one of the major concerns when designing large systems to distribute satellite tv signals. When you have to deal with long coaxial cables and/or many signal splitters, your signal quality degrades significantly. To keep it good enough for the most peripheral users, you have to minimize the number of signal splitter between the LNB and the very last receiver and keep the total cable length as short as possible. You also need to install quite a large dish

and low noise LNB to ensure high carrier-to-noise ratio at the input of the distribution system. However, this may not work well enough for really large systems.

What then? Until recently, you had no choice but to install additional large dishes and LNBs and build several separate distribution systems. Of course, this is not a welcome solution. It adds complexity, cost and the antenna farm on the roof does not make (normal) people happy. But now GlobalInvacom comes to our rescue.

Thanks to their innovative solution based on fiber optic cables and optical splitters, building even very extensive networks becomes easy and manageable.

In order to switch from coax cable to fiber optic cable, the very first thing needed is the conversion of the electromagnetic waves coming from a satellite (or from a DTT transmitter) to modulated light that can be then distributed over fiber optic cables. TELE-satellite readers remember that we already introduced Glo-

balInvacom's FibreMDU Universal Optical LNB. We first reported about this innovative LNB in TELE-satellite 04-05/2008 and in a follow-up story in TELE-satellite 08-09/2009. But this time, we had the opportunity to test something else. It was the FibreIRS LNBm whole-band LNB with integrated frequency stacker.

The FibreIRS LNBm is installed in place of an ordinary LNB but it does not output signal in the familiar 0.95 – 2.15 GHz frequency range. And it does not re-

■ The FibreIRS LNBm mounted on a 90cm dish



SATLINK

Digital Satellite Meter

WS-6936

DVB-T&S COMBO METER WITH SPECTRUM



DVB-S Spectrum:

In satellite signal C band and KU band range ,
show the energy distribution of the received signal,
show Cursor location and signal strength downlink frequency,
Signal was locked.

Show spectrum bandwidth: 1200MHz; 540 MHz; 108 MHz

DVB-T Spectrum:

In the 104MHz-862MHz frequency range or stored state table,
Shows the energy distribution of the received signal (Frequency,
bandwidth, signal strength)Signal was locked, can be displayed
Ber, S / N and other indicators.

So don't wait, Call us for a sample!

For the first time in an Economical digital meter, you are now able to view the actual channel on the screen of the meter. Now you can quickly and accurately align the satellite and you can instantly check the stable of the channel right on the screen of the meter. Transponders, Frequency, Symbol Rate, Polarity, and other settings can be modified by the user.



WS-6909
DVB-T&S COMBO METER



WS-6918P
DVB-S2 Satellite Finder Meter



WS-6932
HD Satellite Finder Meter

**FUJIAN BAOTONG SCIENCE & TECHNOLOGY CO.,LTD**

Add:jiangnan High-Tech.licheng District.QuanZhou.Fujian.China

Tel:86-595-28106252 Fax:86-595-28106253

E-mail:dp02@baotong.cc

Website:http://www.sat-link.com.cn www.hktcd.com/em/fjbaotong



■ Checking the optical signal at one of the fibre optic to coax converters

TEST REPORT | Optical LNB

First of its Kind: Global Invacom Optical LNB

Tested for the first time ever:
LNB with optical fiber
connection in a real
reception test

In the previous issue of *TELE-satellite* we reported exclusively on the development of an LNB with an optical fiber connection by the English manufacturer Global Invacom. At the time the only specimen available was a bulky lab sample. Since then Global Invacom has put together ten prototype optical LNBs so that this new and innovative technology can be tested in real world applications. Global Invacom carried out their first public test at the TELE-satellite Test Center in Austria. Two Global Invacom representatives, project manager Andrew Collar and technician Norman Harris, travelled to Vienna and mounted their optical LNB on an existing 90 cm offset antenna and routed the optical cable from LNB to the lab.

While installing the LNB, Andrew Collar and Norman Harris explained how the new LNB actually works. As it turns out, simplicity is the key to success – a stacker that is built into the LNB distributes the four reception polarizations (vertical low and high band as well as horizontal low and high band) to four distinct frequency ranges.

Next, the RF signal is converted into a digital signal which is then sent through the optical cable via a laser beam. At the other end of the line this

light beam is received by a converter box which reconverts the signal back into a regular satellite signal which can then be processed by any standard digital satellite receiver.

As we watched the Global Invacom staff set up the test system, it became evident that the company intends to introduce the system one step at a time with the aim of keeping everything as simple as possible.

The LNB features two connectors, a standard "F" connec-



Optical LNB by Global Invacom – the 9th of only ten hand-made and fully functional prototype LNBs.

Comment

Tony Taylor, managing director of Global Invacom, and his team of advisors are in the rare but envious position of making decisions regarding the future of a new technology which will affect the entire satellite industry. They have to look for and find answers to questions such as: Which type of plugs will be used for the optical LNB? Shall we rely on the existing standard even though it has not been conceived for outdoor use? How can we make the plug of an optical cable weather-proof? How durable and water-proof are existing optical cables that are available in stores today?


And then there are those strategic questions which are even more difficult to answer: Should optical LNBs be licensed? Not at all, or can technological details be given to other manufacturers? What about the pricing aspects of the optical LNB and converter box? Too high a price will slow down market penetration of any new technology and at the same time favor the development of less expensive competing products with yet another technology. A mishmash of different standards would then be the result.

And then there's the mother of all questions: How should the optical LNB be marketed? Is the term "Optical LNB" one that should stay or does it call for the invention of a new name? How about "Laser LNB"? And finally: How can manufacturers of satellite receivers be convinced to add optical LNB inputs to their boxes? Only one thing is for sure: Global Invacom will find the right answers to all of these questions!


Alexander Wiese



Signal measurement on RA1 transponder on HOTBIRD 13° east. Conventional single LNB (left) and Global Invacom optical LNB (right)



Vertical low band (conventional single LNB on the left and Global Invacom optical LNB on the right)



Horizontal low band (conventional single LNB on the left and Global Invacom optical LNB on the right)

■ TELE-satellite has introduced Global Invacom's fibre optic LNB first in 2008 and then again in 2009.

TEST REPORT | Optical LNB

The Future Starts Now:

Global Invacom Optical LNB The Satellite Reception Revolution

Time flies when you're having fun! It was just about a year ago when *TELE-satellite* ran an exclusive on an optical LNB; a Global Invacom invention.

This wouldn't be the first time that this company, based in Stevenage near London, has made headlines when it comes to direct satellite reception, but the introduction of the optical LNB will undoubtedly become a developmental milestone that has occurred in the age of satellite reception over the past several years, if not decades. But what is it that's so revolutionary about an optical LNB?



Back in the 04.05.2008 issue, *TELE-satellite* published an exclusive report on the first official public demonstration of optical LNB from Global Invacom

Global Invacom Optical LNB



quire a receiver for switching between lower or higher sub-band of Ku Band and horizontal or vertical polarization. No, it outputs two sub-bands of Ku-Band and both polarities stacked one over another in the range 0.95 – 5.45 GHz. Such RF signal is then fed to the Global Invacom RF-to-light

converter which is designated as FibreIRS ODU32. Because here we deal with very high frequencies, we can not use regular coax cable to connect these two devices. Global Invacom provides a special 2 meters long thick and stiff coaxial cable. Thanks to that, even a 5.45 GHz signal is not at-

tenuated before reaching the FibreIRS ODU32.

Except for the satellite signal, the FibreIRS ODU32 accepts also a signal from DTT/DAB/FM antennas. Preferably, the latter one should come not directly from terrestrial antennas but through a DTT processor of Global Invacom described in the previous issue of TELE-satellite (Pages 16-21 in TELE-satellite 06-07-08/2012). In this way, we can achieve the best possible performance. FibreIRS ODU32 has two optical outputs as well as a connector for 20V DC power supply. GlobalInvacom provides a suitable plug type power supply unit. You do not need a separate power supply unit for the LNBm. It gets

DC power via the thick coax cable from the ODU 32.

But the picture is not complete yet. Two optical channels have to be distributed among a number of end users. To do that, you can use optical splitters like Spit2-OFpro or Split4-OF – 2 way or 4 way optical splitters offered by GlobalInvacom. At the very end of such system, a device called FibreMDU should be connected. The FibreMDU converts the optical signal back to the RF domain. It has four outputs. So, up to four regular satellite receivers can be connected to it and each of them will be able to receive any channel from the satellite the dish is directed to. No matter which sub band or polarity. That's because

everything comes down through the fiber optic cables to FibreMDU.

We started our tests with measuring the optical splitters. Split2-OFpro specification promises not more than 4 dB attenuation of the signal (from the input to any of its two outputs). We measured that the actual attenuation was only 3.5 dB. The same story repeated for Split4-OFpro. Its actual performance was better than its specifications (6 dB vs. 7 dB). This is the way good manufacturers specify their products. Once they promise something, they deliver it! It is not a universal rule these days unfortunately. We are happy to say that you can trust GlobalInvacom.

Then, we decided to test the whole system. First, we measured a classical system with a very good low noise LNB installed on a 90 cm offset dish to have a reference for the optical system. Our reference system had about 20 meters of coaxial cable. The problem was which satellite we should use? A very strong one in our location - like ASTRA 19.2° East or HOTBIRD 13° East or rather a weaker one like TURKSAT 42° East. We decided to make it hard for GlobalInvacom and chose TURKSAT. Some of its transponders are actually below the reception threshold of most contemporary receivers. Fortunately, our satellite analyzer – SPAROS SAT HD of SPAUN is an extreme-



■ TELE-satellite Test Editor
Jacek Pawlowski testing
a setup with rolls of fibre
optic cable imitating a large
distribution system.

ly sensitive instrument - capable of processing even such weak signals. We mean signals with a MER of 5.5 dB and less. It corresponds to a C/N below 8 dB. Such transponders are hardly receivable by regular receivers.

The optical system we built had FibreIRS LNBm installed on the same 90 cm dish, FibreIRS ODU32, 100 meters of fiber optic cable, Spit2-OFpro, another 100 meters of fiber optic cable, Spit4-OFpro, another 100 meters of fiber optics cable and FibreMDU to which we connected the satellite signal analyzer. As you can calculate, the system had in total 300 meters of fiber optic cable and two splitters in series.

The results were really astonishing! The optical system was able to deliver almost all transponders we had with a classical system

were significantly stronger in the optical system. MER was at par with the classical system. This means that signal quality did not degraded despite 300 meters of cable and two splitters! You can see our results on the attached graphs.

After the first round of measurements, we changed the output of Spit2-OFpro splitter and did the second run for the optical system. And finally, we changed the output of Spit4-OFpro splitter and repeated the measurements. As you can see, there was practically no difference in performance what proves that all outputs of the splitters produced very similar signal. (graph.1, 2)

All the GlobalInvacom components we tested were perfectly finished off and we had absolutely no problem in making the connections. Just click, click, click and

everything was connected. All optical and RF connectors of the devices had protective covers so that no dirt could access it during transportation or the installation process. Building such optical system was like playing with LEGO blocks. It was nothing but joy.

If we connected more

fiber optic cables, splitters and converters, we could deliver exactly the same signal as presented on our graphs to not fewer but 64 satellite receivers. And all this from a single dish and single FibreIRS LNBm. If we used even more splitters or Spit4-OFpros in place of Spit2-OFpros, the number of end users would be much greater. The only thing one can expect then is somewhat lower output power



except for the two weakest transponders (12577HH and 12618HH). As we said before, those two transponders were below the reception threshold of a regular receiver anyway. So, in fact, we did not lose anything. All the remaining transponders





spark portal



You Tube

YOU PORN



HbbTV

SPARK RELOADED HD

FULL HD LINUX SATELLITE RECEIVER,
MEDIA PLAYER & IP BOX

2 CHANGEABLE FRONT PANELS INCLUDED

GM
Germany



JOB OFFER

We are one of the leading distributors of DVB STB, with headquarters in Germany. We are expanding and are looking for:

ASSISTANT SALES MANAGER EUROPE / AFRICA

Experience in sales required, flexible working hours.
Please send CV and references to: r.chakir@cynextra.com

你在德国工作的机会

FULAN Software
We are officially partner since
more than 10 years.


CYNEXTRA GMBH
Stuttgarter Str. 36
D - 73635 Rudersberg
Tel.: +49 (0) 7183 / 30 777-0
Fax: +49 (0) 7183 / 30 777-20
info@cynextra.com

WWW.GOLDEN-MEDIA.NET






Output power

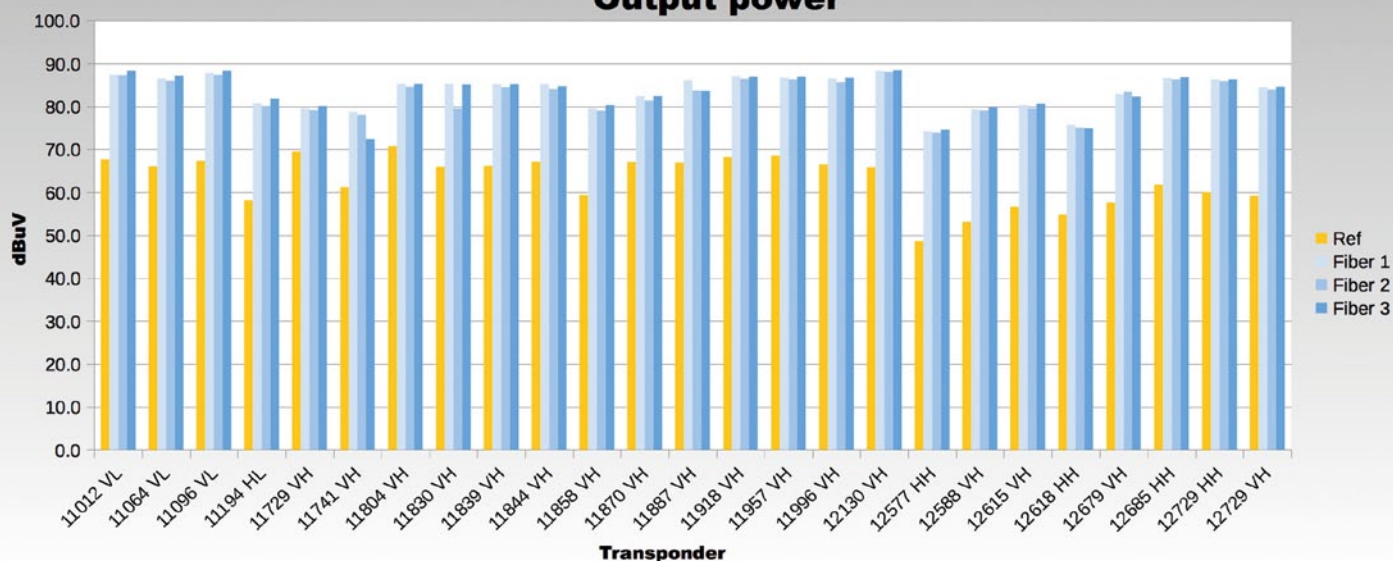

Modulation Error Ratio

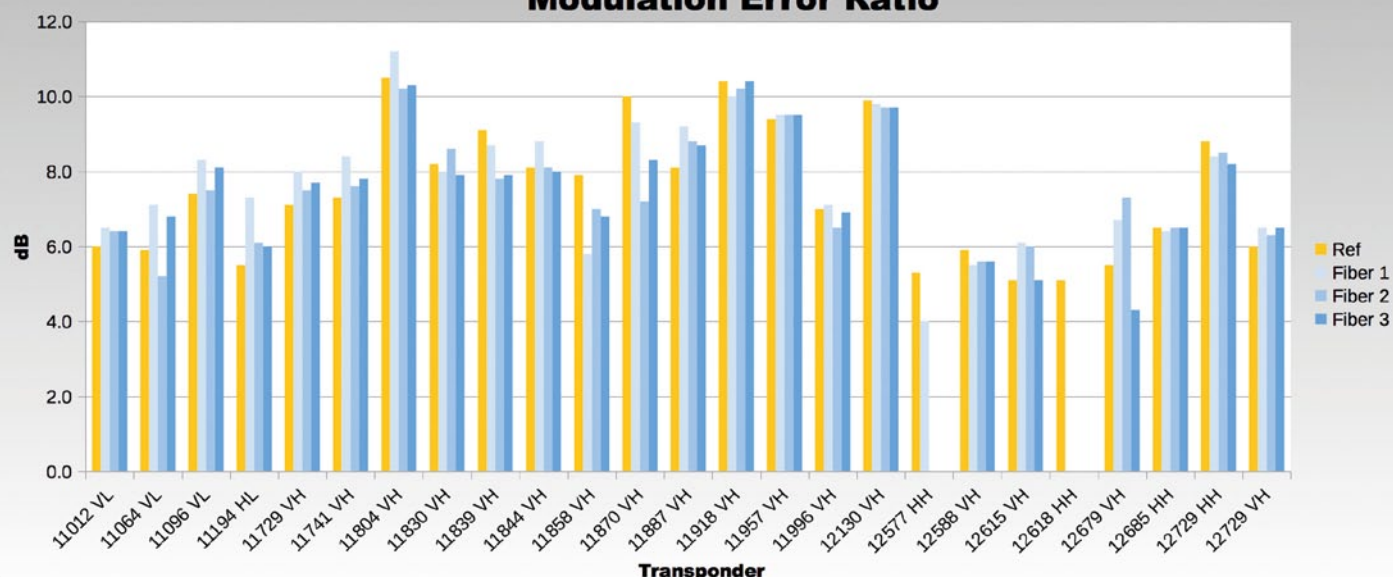

but this is not a problem as the 80-90 dB μ V we achieved in our test setup was a very strong signal. Normally, you have 60-70 dB μ V or so.

So, we can do nothing but heartily recommend the optical system of GlobalInvacom for large distribution systems. You can forget

about signal attenuation or carrier to noise ratio. Using optical components, practically everybody can build a large distribution system without tedious gain margin calculations or interference concerns. No more problems. The battle is over thanks to fibre optics.

Expert Opinion

High signal gain
Very good carrier-to-noise ratio
Solid design and workmanship
Actual performance better than parameter specification
All components available from the same manufacturer

FibreIRS LNBm is larger and heavier than a classical LNB – select a dish with a robust LNB holder



Jacek Pawlowski
TELE-satellite
Test Center
Poland

TECHNICAL

DATA

Manufacturer	Global Invacom Ltd., Great Britain
Web	www.gloablinvacom.com
E-mail	Fibre@globalinvacom.com
Phone	+44-1621-743440
Fax	+44-1621-743676
FibreIRS LNBm	
Function	Wholeband LN with integrated frequency stacker
Input frequency range	10.7 – 12.75 GHz
Output frequency range	0.95 – 5.45 GHz
Noise figure typ.	0.7 dB
FibreIRS ODU32	
Function	RF to fiber optic converter
Satellite input frequency range	0.95 – 5.45 GHz
DAB/DTT input frequency range	217-230 MHz and 470-854 MHz
No. of optical outputs	2
Power supply	20 V DC, < 0.5A incl. wholeband LNB
Spli2-OFpro & Spli4-OFpro	
Function	2 way and 4 way optical splitters
CR typ.	50% and 25 % respectively
Insertion loss typ.	4 dB and 7 dB respectively

Professional Satellite Antenna

WWW.SVEC.CN



*Leading Designer and
Qualified Manufacturer of
Satellite Antenna Dishes*

Made in China



**KU-Band
Satellite Antenna**



**KU-Band
Transparent
Antenna**



**KU-Band
Antenna With
Ground Mount**



**KU-Band
Antenna with
Wall Bracket**



**KU-Band
Antenna with
Plastic Back Mount**



**KU-Band
Satellite Antenna**



**KU-Band
Cone Antenna**



**KU-Band
Satellite Antenna**



CONTACT US:

SICHUAN VIDEO ELECTRONIC CO., LTD.
WWW.SVEC.CN

International Market Department

Tel: +86-28-87838905/8906/8908/8911

Fax: +86-28-87838898

E-mail: svec@china.com

becky@svec.com.cn



**SPAUN
VAM 420
NG PAL**

**High Quality
Analogue
Modulator**



- *easy to create analogue tv signals*
- *extremely good technical specifications*
- *simple and fast programming*
- *also suited for extremely long cables*



■ Ready for the measurements

Generate your own analogue tv channel system

When you need to send an analogue TV signal to a destination far away or when you would like to distribute just a couple of TV channels, it still makes sense to use an analogue modulator and the old good PAL, SECAM or NTSC



color systems. It is quite simple today to create your own analogue TV channel. All you need is a source of analogue signals (TV camera, VCR, or just the output of a satellite receiver) and a VSB modulator. One such modulator

is the VAM 420 NG PAL of SPAUN.



Interestingly, SPAUN recently also launched a similar device, the VAM 420 NG DVB-T. Obviously, this device is doing exactly the same as the VAM 420 NG PAL, only in

DVB-T. But let's get back to the analogue version, which will currently find many more uses than the digital version (there aren't yet so many signal sources with a digital output).

This twin modulator is care-



DVB S2



Installation Meter & Full Measurement for DVB-S2

Real-Time and Multi-Analyzing Spectrum

Constellation Chart

LNB Test MDU & Unicable

BER, S/N(MER),FEC Measurement

Auto Search,Blind Search,NIT Search,Manual Search

Satellite Name & Degree Auto Detective & Display

Auto DiSEqC1.0/DiSEqC1.1/DiSEqC1.2,USALS

Local satellites list showing automatically

Easy upgrading by Ethernet & USB & RS232 Port

Satellite List Editable by Editor via PC

Li-ion Battery(2350mAH), last 6 hours, Fast Charge(2 to 3 hours)

Accessories: Adaptor,Car Charger,upgrading cable,AV cable,

Water-Proof Bag,Compass,User Manual

Size:162x100x42(mm) Weight: 0.45kg

Tiny But Mighty



Xtra-S





Minisat-plus S2/NIT/DSS

Minisat-basic S2/NIT



Worldwide Dealers Are Welcome, And Your Sales Territory Will Be Well-Cared

Milestone DTV Device Creator

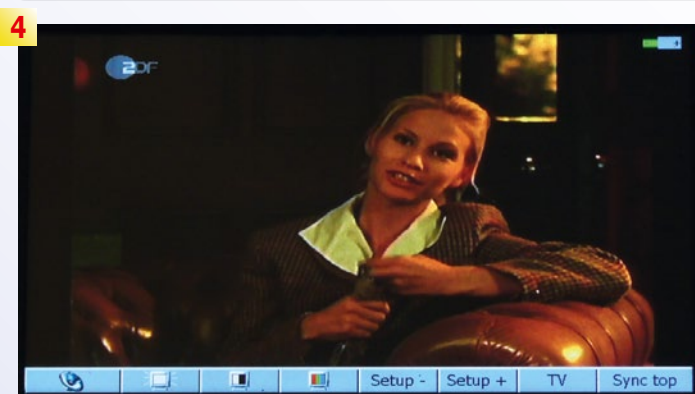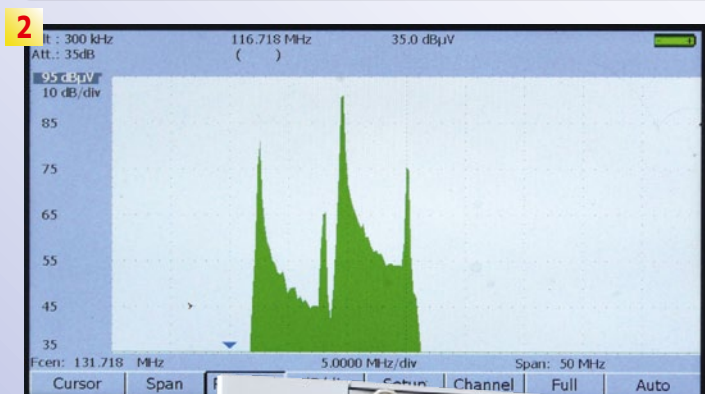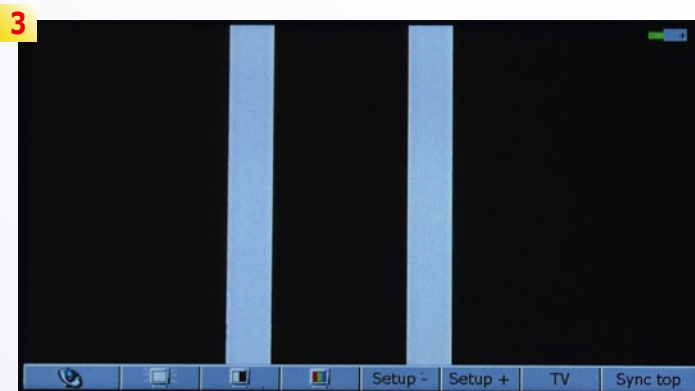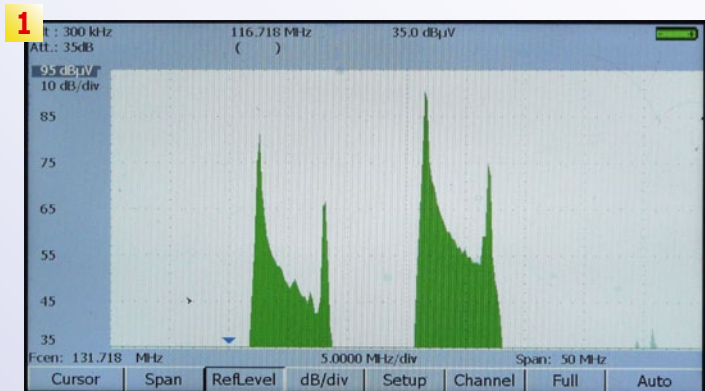

fully finished off as all SPAUN products. It is designed to be mounted either on a DIN rail or on a flat surface, like a wall - either directly or with the help of the included bracket. SPAUN even offers a perfect housing for the VAM 420 NG PAL: it is called SpaceBox and is a 19" rack which can accommodate either up to 5 or up to 10 VAM 420 NG PAL units.

The modulator can be cascaded with three other identical units and in such case you can use a single power supply unit (SPAUN SNG 12/2000) to power all four

modulators. One VAM 420 NG PAL has two sets of inputs (video and stereo audio) and generates two analogue TV channels. As you can easily calculate, four such devices can generate 8 analogue TV channels. SPAUN includes a plastic spacer to be used when mounting the modulators one next to the other on a DIN rail.

Please mind that it is just a modulator - so if the input video signal complies to the PAL color system, it will not be changed and we will get the output in analogue TV in

increase the number of analogue channels. Here you can also feed a coax from a terrestrial antenna to combine the terrestrial signal with your own two channels generated by the VAM 420 NG PAL. Observe the advice SPAUN gives in the included brochure with technical instructions: when connecting a terrestrial antenna make sure you insert an amplifier between the antenna and the modulator that has at least 20 dB input/output isolation.

Programming the modulator is pretty simple. Only three buttons are used: Up, Down and Enter. Frankly saying, we would prefer if SPAUN called the last button L/R or something like that. Its function is just switching between the left and right channel. In the normal mode, you select the left or right channel by pressing the Enter button. The decimal point on the two digit display moves either to the left or to the right digit indicating in this way which channel is currently chosen. You use then the Up and Down buttons to change the channel number from S03 to 69.

When you press and hold the Up and Down buttons simultaneously for one second, VAM 420 NG PAL switches to programming mode. Now you can use the Down button to travel down the "menu" and the Up button to change the value of the present option. The options are as follow: TV system, fine tuning of video carrier frequency, video/audio ratio (16 or 12 dB), test pattern generator (on/off), RF output signal (on/off), RF level adjustment (from 0 through -10 dB), Audio signal level (from -6 dB through +6 dB), Audio processing mode (mono, stereo, dual). When you are through with all the settings, you again press and hold Up and Down buttons simultaneously and leave

the programming mode. And that's all you need to program and operate this device.

To evaluate the performance of the modulator, we drove it with two analogue signals taken from two satellite receivers (video and stereo audio). We connected the SPAUN SPAROS meter to the output of the VAM 420 NG PAL to observe its frequency spectrum. As you can see in our screen shots, the generated signals were extremely

1. The SPAUN VAM 420 NG PAL configured to generated two TV signals: one with maximum level, the other with minimum level (-10 dB). Note that the signals are over 50 dB above the ground noise.
2. As above, but now the adjacent channels are used.
3. Test card picture generated by VAM 420 NG PAL.
4. An analogue TV channel demodulated by the VAM 420 NG PAL and displayed by the SPAUN SPAROS meter



■ The SpaceBox by SPAUN solves any problems, where to mount the VAM modules. It can house up to 5 or up to 10 VAM 420 NG PAL units.

PAL. Should it be SECAM, it will stay as SECAM. However, except for the color system, you should also be aware of the TV standard that specifies how audio is transmitted. And here we have a few possibilities: B, G, D, K, I or L standards. VAM 420 NG PAL is compatible with all of them. It will be perfect for feeding analogue tv sets used in Europe and many other regions of the world where signals like PAL D/K or PAL B/G were used and sometimes are still in regular days. What it does not support are the N and M standards mostly used in the Americas.

The VAM 420 NG PAL has two sets of inputs. You can see the familiar yellow/white/red RCA connectors in two columns located at the top of the front panel. In the bottom part of the panel, there are two F connectors. One of them is the output (where two TV channels appear) and the other in the input. You can connect another VAM 420 NG PAL to the input to



■ A similar device as the VAM 420 NG PAL is the above model VAM 420 NG DVB-T, which has recently been launched by SPAUN. The features are the same as for the VAM 420 NG PAL, but instead of an analogue PAL signal the VAM 420 NG DVB-T has a COFDM output signal.

clear – well over 50 dB above the noise level. We tested both maximum and minimum amplitude settings and performance at the low end and the high end of the ter-

restrial frequency band. We also checked how it worked when two adjacent channels were chosen to output the analogue channels. We are happy to inform that the per-

formance of VAM 420 NG PAL was brilliant for all the settings we tried.

To give you the idea how great the performance was let us provide you with a couple of measurement results. See the table below. C/N significantly exceeded the specification (50 dB) for all

level and frequency settings. Video to audio level ratio was quite close to its nominal value 16 dB. With such superb performance, you can connect the VAM 420 NG PAL even to a very long coax cables without any fear of signal degradation. This modulator is really a top quality device.

Channel	Min. level setting		Max. level setting		
	S03	67	S04	S05	69
Frequency [MHz]	119.25	839.25	126.25	133.25	855.25
Level [dBpV]	80.4	79.1	91.3	91.2	91.2
C/N [dB]	>55.7	>51.4	>57.1	>57.9	>61.8
V/A [dB]	15.1	15.7	17.4	18.1	15.4

Expert Opinion

Excellent C/N ratio exceeding the specified 50 dB.
Very good workmanship.
Versatile mounting options.
Cascadable with other identical units.
Easy programming.



Jacek Pawlowski
TELE-satellite
Test Center
Poland

None

TECHNICAL DATA

Manufacturer	SPAUN electronic GmbH & Co. KG, Germany
Web	www.spaun.com
E-mail	contact@spaun.com
Phone	+49-7731-8673-0
Fax	+49-7731-8673-17
Model	VAM 420 NG PAL
Function	VSF Twin Modulator
Number of analogue A/V inputs	2
Frequency range	110 ... 862 MHz
TV standard	B/G/D/K/I/L
Output level max	90 dBpV
Output level adjustment	0...-10 dB
Spurious level	<-60 dB
C/N ratio	≥ 50 dB
Input level	1 ± 0.1 V p-p
Supply	12 V, 475 mA
Dimensions	196 x 106 x 35 mm



**DESCRIPTION: KU SUPER MINI SINGLE
MODEL :BK5-01**

KU-BAND

Features:

1. Dual Polarity Switchable
2. Super low Noise
3. Digital Ready
4. High Gain Output
5. Easy Installation
6. Waterproof



**DESCRIPTION: C-BAND SINGLE
MODEL :BC-103B**

C-BAND

Features:

1. Dual Polarity Switchable
2. Super low Noise
3. Digital Ready
4. High Gain Output
5. Easy Installation
6. Waterproof



**KU-BAND SINGLE
MODEL: BK-101B**



**KU-BAND TWIN
MODEL: BK-201B**



**KU-BAND QUAD
MODEL: BK-401**



**KU-BAND OCTO
MODEL: BK-801**



**KU BAND DUAL SINGLE
MODEL: BKM-01**



**C-BAND TWIN
MODEL: BCM-12B**



**C-BAND QUAD
MODEL: BCM-14**



**C-BAND ONE CABLE SOLUTION
MODEL: BCS-11**



**C-BAND V./H. OUTPUT
MODEL: BCM-11**



**C+KU-BAND
MODEL: BCK-13**



**DiSEqC 2x1
MODEL: BDS-23**



**DiSEqC 4x1
MODEL: BDS-43**



**DiSEqC 4x1
MODEL: BDS-45**



**DiSEqC 8x1
MODEL: BDS-81**



**DiSEqC 4x1
MODEL: BDS-46**



**DiSEqC 4x1
MODEL: BDS-47**



**MULTISWITCH 2x4
MODEL: BMS-24**



**MULTISWITCH 2x6
MODEL: BMS-26**



**MULTISWITCH 2x8
MODEL: BMS-28**



**MULTISWITCH 4x4
MODEL: BMS-44**



**MULTISWITCH 4x6
MODEL: BMS-46**



**MULTISWITCH 4x8
MODEL: BMS-48**



Jason
INFORMATION



Angela

Marketing Manager : Jason

Mobile: +86-13703006026 MSN: jasonc1127@hotmail.com E-mail: Jason@boiingsat-holding.com

Sales Executive : Angela

Mobile: +86-13823078066 MSN: Wheatfield_wu@hotmail.com E-mail: Angela@boiingsat-holding.com

Marketing Tel: +86-756-8919959 Fax: +86-756-8699312

ADD: NO.5, PingDong 5 Road, Technology Industrial Zone, Nan Ping Town, ZhuHai, Guangdong, China

Postcode: 519060

WWW.BOIINGSAT.COM



Boiingsat[®]



LEXIUM FastAlign 5110Pro Professional Digital Satellite Meter

-
- ***LEXIUM's Newest Satellite Meter Innovation***
 - ***Three-digit azimuth indication***
 - ***Quick Sweep Technology Prevents Missing Target Satellite***
 - ***QuickRecovery Software Restores Meter to Factory Defaults***
 - ***Direct Replacement for the LEXIUM 5100Pro***



■ TELE-satellite Test Editor Ron Roessel aligning a 76cm dish using the new LEXIUM FastAlign 5110Pro Professional Satellite Meter. "It so easy to point the dish with this meter," says Ron Roessel, "and it even makes fun!"

Handheld Powerhouse

LEXIUM is quickly becoming a recognized name when it comes to satellite receivers and test equipment. WS International, a global distributor of the most up to date & current DTH (Direct to home) satellite equipment including MPEG2 & MPEG4, DVB-S & DVB-S2 equipment has distribution branches based out of Atlanta, Georgia, Los Angeles, California and with sales & development offices in Zhuhai and Guangzhou China markets the LEXIUM brand name world-wide. Just a few months ago, in fact, it was in the 12-01/2012 issue of this magazine, TELE-satellite introduced the LEXIUM FastAlign 7100Pro satellite signal analyzer. The 7100Pro boasted the unique capability of identifying the name of a satellite as soon as the meter showed a lock. The LEXIUM line of digital satellite signal meters, up until recently, also included the FastAlign 5100Pro. With all this going for them, did they feel the need to sit back and relax after these success stories? Did they feel that their job was done? No, not at all. Instead, the engineers went straight back to work.

The result of their efforts is the LEXIUM FastAlign 5110Pro. The 5110Pro is actually a direct replacement for their very popular 5100Pro model. Of course, when we

heard about this new meter, we wanted to find out more about it. If it's anything like the 7100Pro, then this new meter should be just as exciting, even more so. Once again our friends at WS International provided us with a sample of the FastAlign 5110Pro so that we could have a little fun with it and see what all the fuss is about.

The 5110Pro signal meter comes packaged in a nice, small box along with all of its accessories including two battery chargers – one for a wall outlet and another one for the car, two female-to-female "F" type adapters, a USB cable and a handy carrying strap. There's also a 24-page English-language user manual.

So, let's look at the meter itself. The 5110Pro is a handheld digital signal analyzer that is small enough to fit in one hand. The internal electronics are enclosed in a sturdy black plastic case that is 142 x 82 x 35mm in size. The case itself is encased in a bright yellow rubberized cover that acts as a shock absorber; it will help protect the analyzer if it should ever fall to the ground. The rubberized cover can easily be removed if you ever need to access the battery compartment. At just a hair over 1.0 pound in weight, the meter is very easy to carry around with you wherever you have to go. So, it's no trouble to climb that ladder to the top of that roof with the 5110Pro hanging on your shoulder; you won't even know it's there.

The meter sports a pair of male "F" type connectors on the top side of the unit. The connector on the right side is



TELE
satellite
AWARD 09-10/2012

LEXIUM FastAlign 5110Pro
Digital Satellite Meter
Helps enormously to install
any satellite dish

www.TELE-satellite.com/12/09/LEXIUM

used to connect to the LNB on the satellite dish. Power to the LNB is supplied by the 5110Pro itself. The manufacturer specifies that the meter should last for about four hours on a single charge

and this should be more than enough time for a typical installation. However, if you find that a little more time is needed at the installation site, the meter can also be powered by the satellite receiver. That's

where the second "F" connector on the left side comes in. Ordinarily, the left connector isn't needed unless supplemental power is needed. The two female-to-female "F" type adapters supplied in the package are used to connect the meter to any existing coax cables.

Oddly enough, though, the two male "F" connectors on the meter are not marked in any way on the casing; we had to refer to the user manual in order to figure out which connector did what. There are also no markings for the ports on the bottom of the 5110Pro but in this case it was easy to figure out what they were

for just by looking at the type of connector that was being used.

On the bottom of the analyzer you'll find the charging port for the two power adapters (home and car), a USB port to link the meter with a PC and a number of slots behind which is located the meter's speaker. The front panel of the meter consists of an LCD display and a keyboard. The display is 6.2 x 4.6mm in size and is divided into five different sections. We'll get more into this a little later. The keyboard is located under the display and is made up of a numerical keypad as well as a number of additional color-



ed function buttons.

According to the manufacturer, the meter should be fully charged before it's used for the first time. The charging process should take about four hours but no more than six hours to complete. An LED on the front panel of the analyzer lights up red indicating that the meter is being charged by the external power supply. This LED turns green when the meter is turned on and the power cord is removed.

To turn on the 5110Pro, momentarily push the red POWER button on the front panel. If the meter has never been used before, the display will not show any data except for

SmartWi wireless Multi Room Solution



New SmartWi ready for Operators

Please let us introduce the new SmartWi. The market leader in wireless multi-room solutions now comes with a range of improved technical features, and we are frankly very proud of the new design. Coming from Denmark it is almost like the fairy tale 'The Ugly Duckling' that turned into a beautiful swan.

The improved qualities make SmartWi the obvious choice of Multiroom Solution for Operators. It is very flexible and may be adopted to the specific preferences of an Operator in terms of technology, design or commercial setup. The final result is increased customer loyalty and a stronger future market presence for the Operator.

Smartwi – The original professional DVB Multiroom Solution since 2004.

Smartwi International A/S

E: info@smartwi.net

W: www.smartwi.net

T: 45 70 26 00 31



smartwi®

www.smartwi.net



zeroes. As mentioned before, the display is divided into five sections: Positioning, Satellite Selection, Channel Number, Latitude and Longitude and Measurement. The Positioning section runs across the top of the display from one side to the other and shows the required azimuth, elevation and polarization angle settings for the target satellite. This section will only display data if you already have entered in your local position and selected the satellite you want to find. The Satellite Selection section on the left side displays information on the currently selected channel (satellite position (L), transponder frequency (F), symbol rate (SR), LNB local oscillator (LO), polarization (LNB) and 22 kHz). The Channel Number section in the lower left hand corner of the display shows the currently

selected channel number either from the "local channel list" or from the "user defined channel list". The Latitude and Longitude section highlights the location where the meter will be used in degrees latitude and longitude. Also found here are a number of additional function indicators such as battery level, PC link, speaker mute and channel list. The Measurement section displays the signal strength (S) and quality (Q) levels in bar graph form. Additionally, the signal strength (S) is also shown in numerical form as is the signal-to-noise level (S/N) and the bit error rate (B).

In order to get the most out of this meter it's clear that the very first step would be to enter in the local latitude and longitude position where the meter will be used. For our location here in Long Island, New York, it is 41°N 073°W.

Only whole numbers can be entered; a more precise location for us would have been 40.7°N 73.3°W but for the purposes of entering in our location in this meter, we had to round to the nearest whole number. Fortunately, this minor limitation should not hamper us in any way when trying to find a specific satellite.


Now that our location has been set up, it's time to see what this meter can do. The 5110Pro comes with a pre-programmed "local channel list" that includes nearly every satellite from around the world. The LEXIUM 5110Pro automatically filters out the satellites that are below the horizon and thus not visible from your location based on the local coordinates that were entered earlier. For our test location the visible satellites (above the horizon) included all those from

1. As the antenna was rotated, the signal quality (Q) bar graph clearly shows that we were closing in on GALAXY 19
2. Turning the antenna a little more and "Locked" lit up telling us that we had a signal lock on GALAXY 19
3. Adjusting the dish a little further increased the S/N level until we reached a peak S/N level of 10.1 dB. The dish was now perfectly aligned with GALAXY 19.
4. Next we tried for the HISPASAT satellite at 30°W using the same antenna. As the dish came within range of the target satellite, the 5110Pro showed that we were getting close; the signal quality bar graph (Q) began to react
5. And then moving the antenna just a little bit more...LOCKED!
6. Fine tuning the antenna...
7. ...until a maximum S/N level was achieved. The antenna was now peaked on HISPASAT.

139.0°W to 4.8°E for a total of 111 channels to choose from. If you change the location coordinates in the meter, the list of visible satellites changes along with it to adapt to the new location. To give you an

THE LASER DISH SYSTEM 500

激光卫星接收天线系统 500

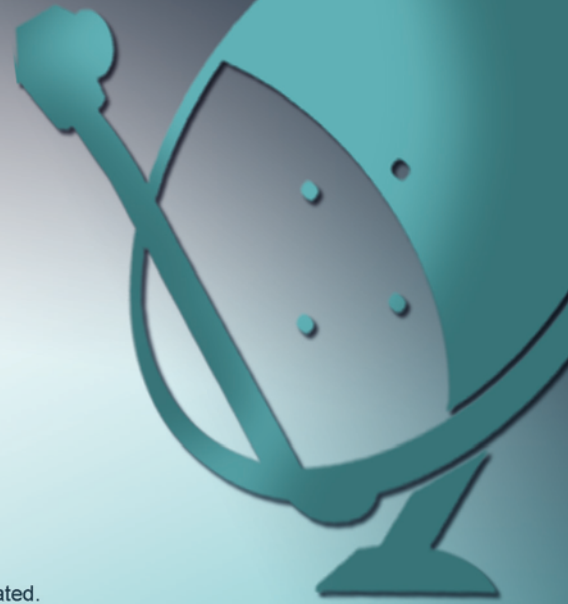

The Laser Dish System allows mounting satellite dish far away from where the satellite receiver is located. Ideal for difficult reception areas, e.g. when a dish installation is not allowed in vicinity to receiver or when obstacles hinder satellite reception. The Laser Dish System is based on the fibre optic system invented by GlobalInvacom and allows the connection of up to 4 satellite receivers. 激光卫星接收天线系统支持卫星接收机和卫星接收天线之间的远距离传输。假想有一些接收比较困难的地方，例如：当卫星接收天线不允许安装在邻近卫星接收机的地方或者有障碍物阻挡卫星接收。激光卫星接收天线系统基于GlobalInvacom公司发明的光纤系统，他允许连接多达4个卫星接收机。

The Laser Dish System 500:

- Fibre Optic LNB, Type Universal, Ku-band, Offset, 40mm
- Power Supply for LNB
- 500m Fibre Optic Cable, ready to connect
- Converter Type Quad for 4 Satellite Receiver or Multiswitch

Guaranteed 100% Signal Quality
thanks to GlobalInvacom
Fibre Optic technology
GlobalInvacom的光纤
技术使信号质量保证100%



powered by
GlobalInvacom



NEW



500 METER 500米

Distance from Dish to Receiver

从卫星接收天线到卫星接收机的距离

ALuoSat
29D, Block B, Nanhai Building, Dongmen Centre Road,
Luohu District, Shenzhen 518001, CHINA

Tel.: +86-755-82175354
Email: sales@ALuo-Sat.com
Website: www.ALuo-Sat.com

ALuoSat

Advanced Technology Division

ALuoSat
深圳市罗湖区东门中
路南海中心B座29D, 518001

电话: +86-755-82175354
邮箱: sales@ALuo-Sat.com
网址: www.ALuo-Sat.com

idea of how this changes, we changed the local coordinates in the analyzer to 37°N 122°W to simulate the use of the 5110Pro in San Francisco, California. The list of visible satellites for this west coast location included everything from 160°E to 43°W. As you can see, the meter automatically adjusts the local channel list based on its operational location. One thing to keep in mind though: this visible list of satellites represents those satellites that can be "seen" from your location and does not necessarily represent a list of those satellites that can actually be received. Only those satellites that have a beam pointing in your direction can be received.

In addition to the "local channel list" there's also a "user defined channel list". This list is customizable by the user so that more popular satellites can be accessed more quickly. The 5110Pro comes shipped from the factory without any data in this list. When setting up the "user defined channel list", the first open channel is selected so that a satellite can be set up. So, let's say, for example, we wanted to add Galaxy 19 at 97°W into the user defined list. The meter has to first be placed into the "user defined channel list" mode by pressing and holding down the Option/Local button for about three seconds.

Once the meter is in the correct mode, you can then enter in all the relevant data for Galaxy 19 (orbital position (L), transponder frequency (F), symbolrate (SR), local oscillator frequency (LO), polarization (LNB) and 22 kHz on/off). For this purpose we chose the 12.177V GHz transponder with a symbolrate of 23000. As soon as the entered data is saved into the meter's memory, the correct alignment information for the antenna (azimuth, elevation

and polarization angle) instantly appears at the top of the display. This data tells you exactly where to point the antenna to receive that satellite.

So, with the meter in hand, we went outside to align the dish. Since Galaxy 19 was just entered into the "user defined channel list", it makes sense to begin by aligning our antenna to this very popular satellite. Keep in mind that you can use either the "user defined channel list" or the "local channel list" to start with since Galaxy 19 also appears in the pre-programmed list. You'll also need a short piece of coax cable to connect the meter to the antenna's LNB. And don't forget the compass so that you know which way to turn the antenna! As it turns out, the 5110Pro is not compatible with any of the DiSEqC protocols so the analyzer needs to be connected directly to the LNB; there cannot be any DiSEqC switches in between the meter and the LNB.

As luck would have it, we had a spare 76cm offset dish lying around so we decided to use this antenna to align to GALAXY 19. We installed a standard Ku-band LNB (LOF = 10.750 GHz) on the dish and connected it to the LEXIUM 5110Pro meter using a short 10-foot piece of coax cable. The meter was turned on and we decided to use the channel data that was just entered into the "user-defined channel list". We could have also used the preprogrammed data in the "local channel list" (channel 38) that was associated with the Ku-band side of GALAXY 19 at 97°W. This channel was set for 11.789 GHz, 28125 SR, LOF 10.750 GHz and LNB 13 (vertical polarization). Either transponder would have worked for this test.

At this point pressing any one of the number buttons (0 to 9) activates the measurement section of the meter. The 5110Pro was set to go; all

we had to do is start moving the antenna into roughly the correct position. According to the 5110Pro, the antenna alignment settings yield an azimuth (A) of 214°, an elevation (E) of 36° and a polarization angle (P) of -25°.

With the help of our compass, we turned the antenna in the general direction of 214° and elevated it roughly 36° above the horizon. Since our 76cm dish was not on a horizon-to-horizon (H-H) mount, the LNB had to be rotated inside its holder so that its horizontal and vertical polarization levels matched the position of the GALAXY 19 satellite. We adjusted the position of the LNB in its mount to reflect the -25° offset suggested by the meter.

Thanks to the 5110Pro's built-in QuickSweep technology you don't have to worry about missing the target satellite if you turn the antenna too quickly. There is no delay from the time the signal is received to when it is displayed on the meter; it reacts almost instantly. This lets you move

the antenna much faster than you might otherwise be able to if you were using a different meter. It's a time saving feature that helps to speed up the alignment process.

So, with the meter connected to our 76cm dish and turned on, we rotated the antenna towards 214° while keeping an eye on the 5110Pro. The analyzer also has an audible tone that changes pitch with the signal level. This lets you take your eyes off the meter and listen to changes in signal level if for any reason the display is out of your view.

As soon as we approached the 214° position as dictated by the 5110Pro, the signal quality bar graph on the display (Q) began to instantly react. We had found GALAXY 19 on the very first pass! As we continued to move the antenna the signal quality (Q) bar graph continued to increase and the "Locked" indicator on the display illuminated. We continued to move the antenna until we reached a maximum point. We then fine



LEXIUM




NDS3975 DVB-S2 HD IRD

New design IRD with video monitor LCD equipped on the front panel



Inner Principle

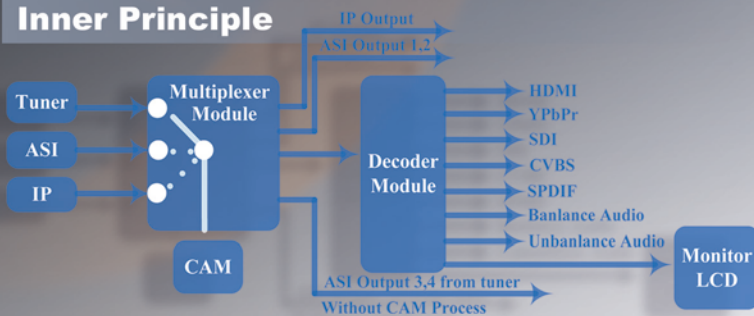

Key Features

- Various tuner available
- MPEG-2 & MPEG-4 decoding
- Re-multiplexer embedded
- Supports Tuner, IP, ASI Input at the same time
- Supports IP, ASI, Decoding output at the same time
- Supports CAM card insert (CI/CI+)
- Supports Front Panel and NMS Operation
- Support 10xSPTS output

NDS3402-C DVB-S2 Modulator

High performance modulator developed according to DVB-S2 (EN302307) standard



Key Features

- Backwards-compatible with DVB-S (EN300421) modulating standard
- Two ASI inputs supporting hot backup
- Supporting local and remote control
- Output level attenuation
- 10MHz outer reference clock input
- Output frequency range: 950~2150MHz
- Coupling output: 24V/4A DC optional
- Coupling output: 10MHz reference clock optional

www.dsdvb.com



Dexin Digital Technology (Chengdu) Co.,Ltd

56# Feizhushi Street, Jiangxi Road, Wuhou District, Chengdu, Sichuan P.R. of CHINA
Tel: +86-28-85558928, +86-28-85550524, +86-13882088846 ■ Fax: +86-28-85585255
<http://www.dsdvb.com/english> ■ E-mail: sunyu@dsdvb.com

tuned the elevation (E) until a maximum S/N level was achieved. The dish was then secured in place; it couldn't get any easier than that.

Was this just beginners luck? We wanted to make sure so we decided to give the HISPASAT satellite at 30°W a try with the same dish. From the "local channel list" we scrolled through the channels until we found the only entry for 30°W located at channel 86. The entry at this location was for 11.466 GHz, 3500 SR, 9750 LOF. As it turns out, this

frequency is not an active frequency for North America.

Luckily, changing the existing entry in the "local channel list" to a workable value is a snap. At present, the cursor arrow indicator should be pointing to the channel number (in this case channel 86). By momentarily pushing the Option/Local button on the front panel once, the cursor arrow should move to the frequency position (F) and the first digit in the current frequency should be blinking. Simply enter in the cor-

rect transponder frequency using the numerical keypad and then momentarily press the Option/Local button once again to move the arrow cursor to the next entry (SR). For our test we used the 12.052H transponder with a symbol-rate of 27500. Continue this procedure until all the remaining parameters are entered and then press the Save/C button to store the data. The LEXIUM 5110Pro is now ready for the HISPASAT satellite.

According to the 5110Pro, the proper antenna settings for HISPASAT are an azimuth (A) of 125°, an elevation (E) of 25° and an LNB polarization adjustment (P) of +38°. We repositioned the LNB in the mount to reflect the new polarization adjustment angle of +38°. Next we loosened the mounting bolts on the antenna so that it could be moved. The antenna was turned towards an azimuth setting of 125° and sure enough as we approached the 125° position the signal quality bar graph (Q) on the meter began to react.

As the antenna was moved a little more, the S/N level increased and the "Locked" indicator on the display illuminated. We had found HISPASAT

and once again we found the target satellite on the first pass!

Clearly, the LEXIUM 5110Pro's QuickSweep technology lives up to its name. The meter reacts instantly when you approach the target satellite as you're turning the antenna. Thanks to this speedy response time, you don't have to sit there waiting for the analyzer to do its job every time the antenna is moved a notch. You can simply rotate the dish on its mount and stop the rotation when the analyzer reacts to the target satellite. It's that simple.

A note to those of you who will be setting up systems that use universal Ku-band LNBs: the LEXIUM 5110Pro will work with these types of LNBs but not exactly in the way that you might expect. When selecting the LOF to be used, you'd undoubtedly expect one of the choices to be "universal" however that is not the case here. With this meter you have to enter the correct universal LOF (9.750 or 10.600 GHz) and set the 22 kHz signal to ON if needed. The correct settings will depend on whether the transponder frequency to be received is in the LNB's low band (10.7 to 11.7 GHz) or high band (11.7 to 12.75 GHz). Of course, the LEXIUM 5110Pro is also C-band compatible.

And as if all of the above wasn't enough, this meter comes with yet another fascinating feature: it has Quick-Recovery Software built in. This software restores the 5110Pro back to its original factory settings should a problem ever occur during a data transfer to the meter. In the past such a data transfer interruption would almost always result in a dead meter. Restoring the meter used to involve opening up the case, locating and then reflashing the memory. It's a process



that's not all that much fun to perform. But thanks to the built-in QuickRecovery software, you don't have to worry about any of this. Simply press the "Recovery" button to reset the meter back to its original factory settings. How great is that?

Earlier we mentioned the USB port located on the bottom of the meter; this port allows you to connect the meter to your PC and gives you the ability to add, delete or modify the satellite list, transponder specifications and 22 kHz settings directly from your PC or laptop. In order to be able to do this, you'd need to download the necessary interface software which can be

obtained free of charge by going to www.LEXIUM-dvb.com.

The LEXIUM FastAlign 5110Pro digital satellite meter is an extremely powerful signal analyzer wrapped up in a nice little package. It's a lightweight handheld device that you can easily hold for longer periods of time without any fatigue. It comes with numerous useful features that help make satellite installations a breeze. It comes with a pre-installed list of satellites from all around the world and yet is smart enough to only show those satellites that are visible from your location. It would make the perfect addition to any satellite installer's toolbox.

Expert Opinion

Lightweight, easy to use handheld digital satellite signal meter for precise alignment of antenna to target satellite. Its QuickSweep technology takes the worry out of accidentally passing the target satellite while moving the antenna in that the meter reacts instantly to any antenna movements. Its three-digit azimuth display allows this meter to be used anywhere in the world.



Ron Roessel
TELE-satellite
Test Center
USA

No DiSEqC protocols; meter must be connected directly to the LNB without any DiSEqC switches in between. There's also no universal setting for the LOF; universal LNBs can be used with this meter but the LOFs need to be set up manually.

TECHNICAL DATA

Manufacturer	LEXIUM California, USA
Home Page	www.LEXIUM-DVB.com
E-mail	sales@lexium-dvb.com
Model	FastAlign 5110Pro Digital Satellite Meter
Input Frequency Range	950 – 2150 MHz
LNB Power	13V, 18V; 400mA
C/Ku-band Compatible	yes
Memory	300 channels (local channel list); 100 channels (user defined list)
Symbolrate	2 – 45 Ms/sec
22 kHz Control	yes
USB Interface	yes
Operating Temperature	0 - 40° C
AC Power Supply	Input 100 – 240VAC, 1.6A, 50-60Hz; Output 18.5VDC, 3.5A
Dimensions	142 x 82 x 35mm
Weight	1.0 LBS (including battery)

MORE ABOUT THIS COMPANY

www.TELE-satellite.com/TELE-satellite-1109/eng/wsinternational.pdf



Using the LEXIUM FastAlign 5110 Pro in Europe

Thomas Haring

Even though the LEXIUM FastAlign 5110 Pro is distributed by US company WS International the device comes with all prerequisites that are needed to use it in other regions as well. This is all the more reason for marketing their latest meter on a

global scale. Due to the fact that the local position has to be entered when the meter is first turned on, it is possible for the device to find out fully automatically which satellites are visible at the current location and which positions are below the ho-

zizon. Obviously, we were more than happy to evaluate the LEXIUM FastAlign 5110 Pro in one of our European test centers in Austria.

First things first, and so we entered our coordinates for Vienna, Austria right after turning on the LEXIUM Fast-

Align 5110 Pro for the first time. Hardly had we keyed in 16° East and 48° North that the FastAlign 5110 Pro called up a list of pre-programmed satellite positions ranging from 58° West to 92.2° East. This means the device truly shows all satellites that can be received at our current location – at least in theory. Why do we say in theory? The fact is that the list of satellites shows visible satellites, as opposed to receivable beams. For example, CHINASAT 9 at 92.2° East is shown as the easternmost visible orbital position, even though its beams are sent to China only and reception in

LEXIUM

Vienna therefore is not possible. We think this makes sense as beams can easily be changed and moved by satellite operators, so that the odd Asian position might in fact be of interest in Europe one day. If or when such changes occur, the new LEXIUM signal meter will already have the relevant parameters stored in its internal memory.

We appreciated the fact that LEXIUM has pre-stored both C band and Ku band transponders: While the Ku band definitely dominates the European market the C band is the preferred frequency range in most other corners of the world.

In total, we found 109 pre-stored satellite entries on our list. You might object at this stage that this is way beyond the number of receivable positions in Europe – and you're right. LEXIUM has chosen to create separate entries for Ku band and C band transponders on satellites that use both bands, such as INTELSAT 14 at 45° West. In terms of usability, they couldn't have made a smarter decision.

Then again, an impressive number of satellite entries is

not everything that counts. The painful truth is that it can quickly become worthless if transponder data are not equally up-to-date and comprehensive. To check the LEXIUM FastAlign 5110 Pro's worth in that field we randomly selected a number of European satellite positions and tried to align our dish to those birds using the LEXIUM meter. We noticed right away that the pre-stored LOF for the high band was correctly set at 10600 for some positions (such as ASTRA 4A at 4.8° East), while other satellites (such as BADR 26° East) came with a wrong frequency of 10750. In addition, none of the pre-stored high band entries came with an activated 22 kHz signal, which is required for the LNB to switch from low band to high band. This means that European users have to make a point of checking all pre-stored transponder settings for the selected satellite and the LNB that is used.


Most European satellites come with correct transponder data, however, so that the LEXIUM FastAlign 5110 Pro turned out to be a useful companion for align-



ing satellite antennas. It worked nicely with weaker signals as well, such as those from BADR 26° East or ASTRA 2D 28.2° East – the built-in tuner boasts a reasonably low threshold and the measurement results turned out to be very precise. We loved how quickly the LEXIUM meter reacts to changes in the incoming signal, which in turn allows for

a swift alignment process without the risk of overlooking a signal while moving the antenna.


To sum up, we truly enjoyed working with the LEXIUM FastAlign 5110 Pro under a European sky. It's a very handy tool and if the manufacturer decides to update the pre-stored transponder list it would leave nothing to be desired.

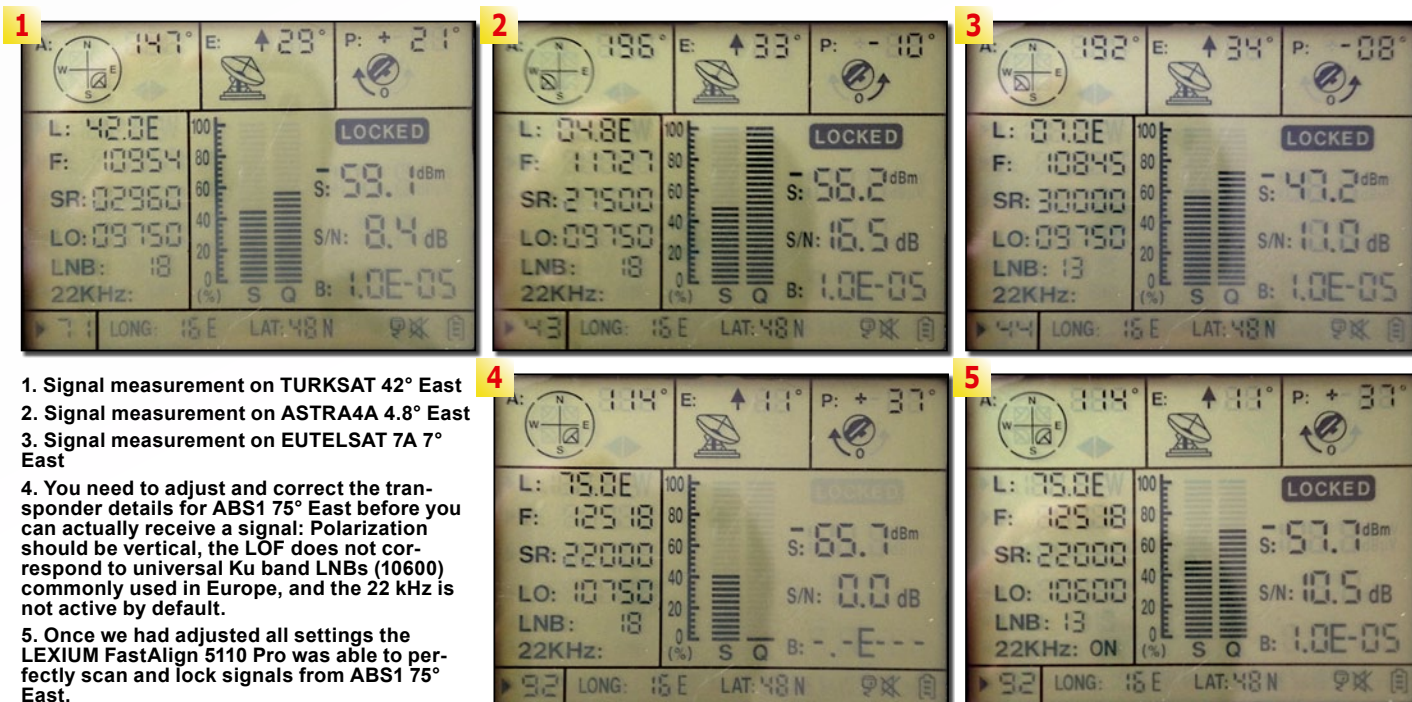



The New Generation Fibre Integrated Reception System

The only cost effective solution for distributing
**Satellite IF, DTT and DAB over a
Single Fibre Optic Network.**

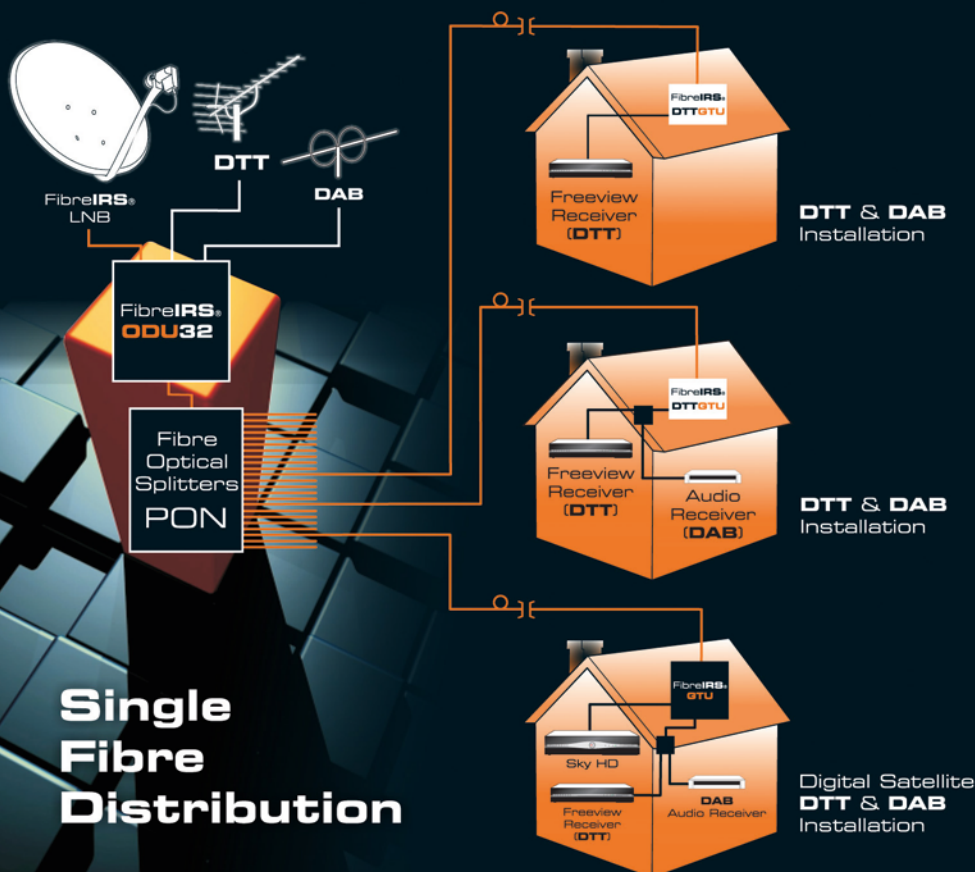

- Compatible with all digital satellite STBs
- Compatible with all DTT/Freeview™ STBs
- Compatible with all DAB Tuners
- Can be easily expanded to **256** points
- Simple installation* via 'Plug & Play' technology
- Ideal for short or long cable runs.

*Compared with existing Fibre Systems

The Wonderful World of Spark



- ***Large selection of freely receivable channels***
- ***Web-TV offers SD, HD and 3D channels***
- ***Simple manual editing of the channel list in Spark***
- ***Spark software shows all of the technical parameters of the Web-TV channel***

Part 4: Web-TV



Unlimited TV via the Internet

Thomas Haring


just software updates or the transfer of recordings.

Fulan takes it quite a few steps further and opens for the user not only the tuner input as a signal source but also the Internet as a way to view hundreds of TV channels. This function can be found on any Spark software equipped receiver under the Web-TV menu in the Networking section of the Main menu. Before we go deeper into the specialties of this feature, we want to quickly get a handle on some of the terms that you might come across.


The International Telecommunication Union (ITU) defines IPTV as TV, video, audio, picture, multimedia and data services that are transmitted via IP based networks with the required amount of quality, security, interactivity and reliability. Clearly, though, the Internet does not satisfy all of the requirements of quality, security and reliability so that it's relatively easy to tell the difference between WebTV and IPTV. If an end-user uses his receiver, whether it's a mobile or stationary device, to make a direct connection with the IPTV network of his provider without the need of an Internet connection, then we're talking about IPTV. If the Internet is required as a transmission medium, then it's WebTV.

While the IPTV end-user, in a provider controlled en-

1

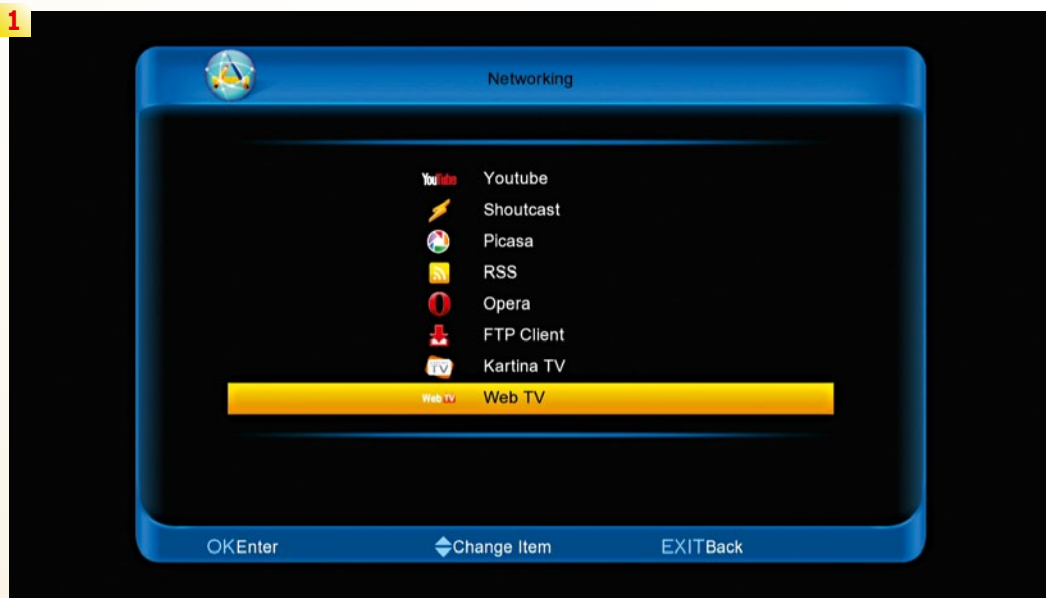


2

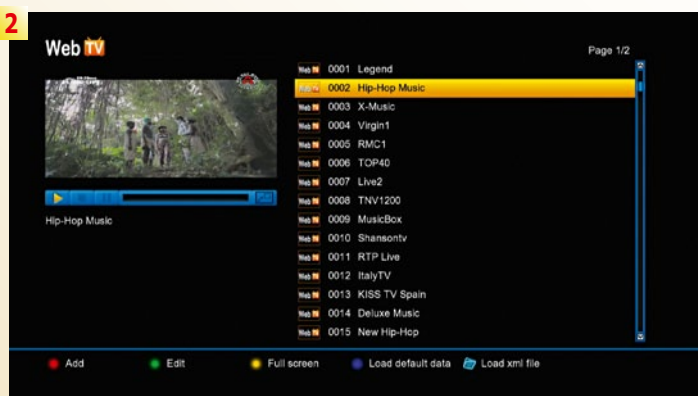

Fulan, with their Spark software platform, has given themselves an ambitious goal: and that is to provide the end user a software package for their digital receiver with the largest possible array of functions. Obviously, with requirements like these, the network/Internet connection of the receiver won't be limited to


3

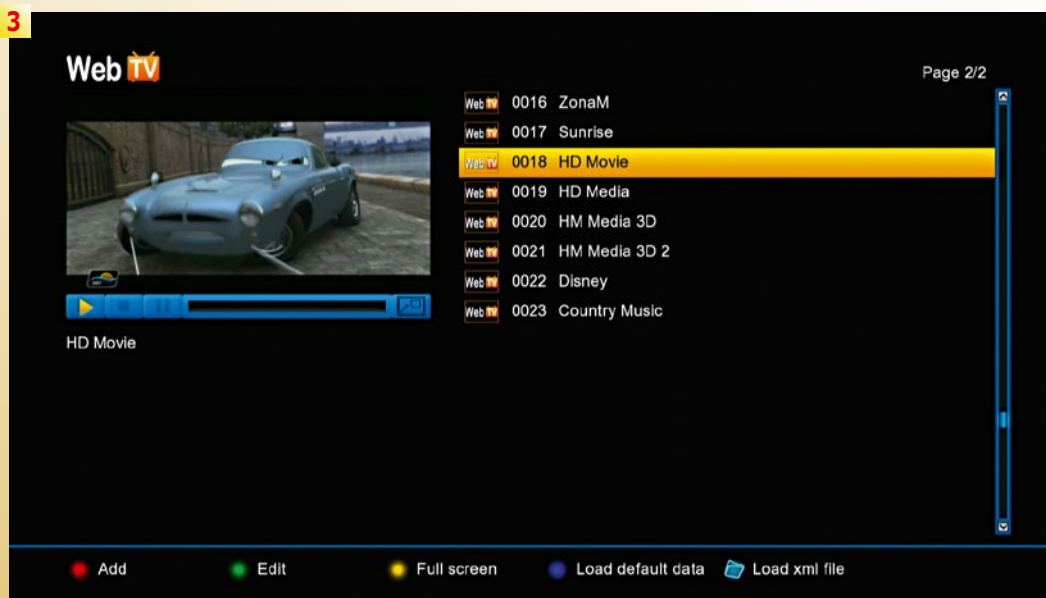

1. The WebTV player can be found in the Networking section of the Spark software

2. While the channel list appears on the right side of the display, the currently selected channel can be seen in a smaller window on the left side

3. Even HD content can be received via WebTV

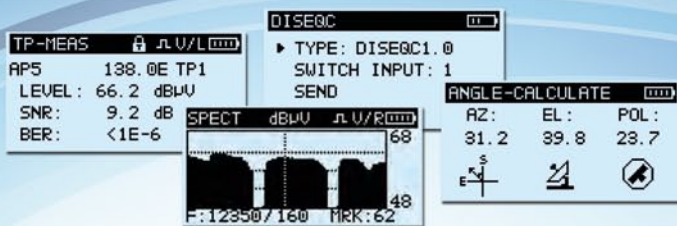



S20/S30 ✓ Satellite Finder



- S20 supports DVB-S
- S30 supports DVB-S2
- C, Ku, Ka or L band
- SNR and BER
- Spectrum function
- Support DiSEqC 1.0/1.1
- Signal level and quality display together
- 128×64 matrix LCD with back-lighted
- Large lithium battery capacity, over 4 hours working time
- Software upgrade and parameter set via USB interface



S7000 ✓ TV Analyzer

- All standards in one: QAM(J.83A/B/C), 8VSB, DVB-T/H/T2, DVB-S/S2
- Digital/Analog TV and Satellite TV analysis
- MPEG2 Transport stream analyzer and monitoring via TS-ASI input & RF input
- Fast spectrum analysis with 5~2150 MHz frequency span
- DSP Technology to support different Video decoding: MPEG-2, MPEG-4 and H.264 for 1080i, 720p and 576i, support PAL/NTSC/SECAM color system
- Support SD&HD Video format
- CI module (Common Interface) for encrypted channels
- TS-ASI input and output
- TS record and TS replay
- IPTV analysis option
- GPS option
- HDMI, LAN and USB interface
- Easy to use
- High resolution 7" TFT LCD with bright display for indoors and outdoors use
- W245×H194×L105, light weight
- Working time >4 hours (battery)

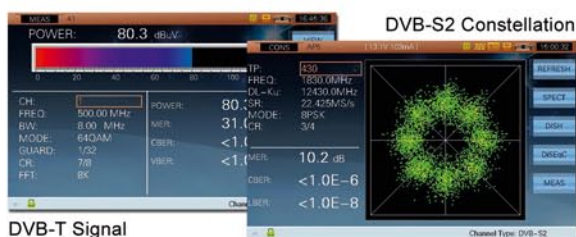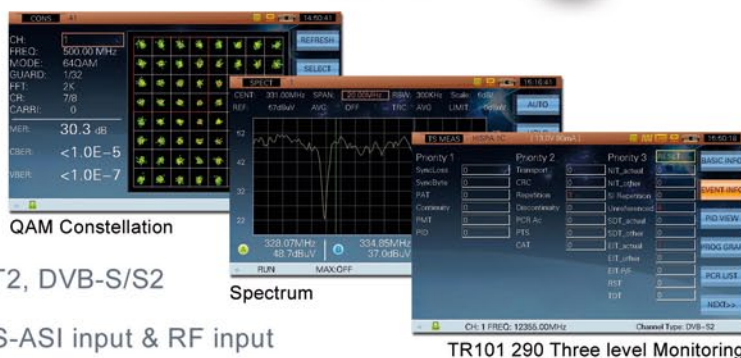

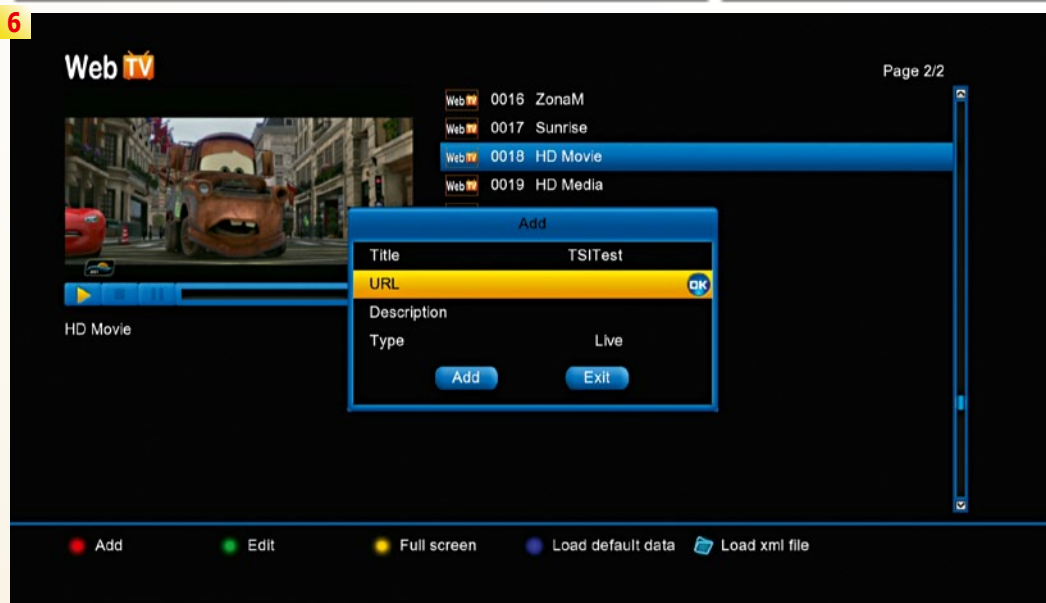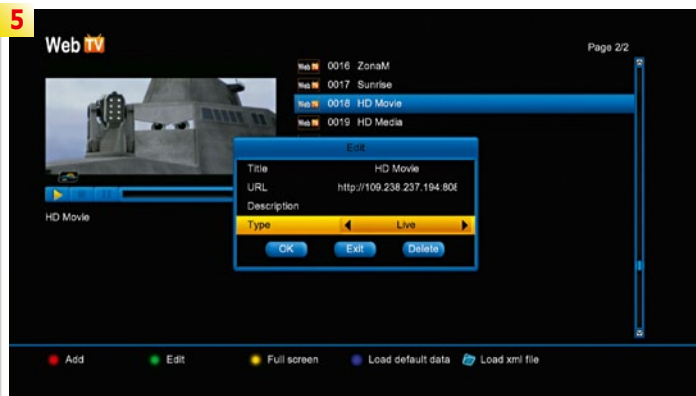


essary reception hardware to the end-user.

The absolute best part about WebTV is that so much content is available free of charge while IPTV is not free because of the costs incurred by the providers for infrastructure maintenance.

Let's get back to the digital receiver with the Spark software: when you turn on the WebTV function for the first time, you'll be greeted with a blank screen without any programming entries. Fulan is planning to offer a standard channel list with a number of interesting entries, but, unfortunately, this feature was not yet available on our test sample. While it is relatively easy with satellite or cable reception to set up a fre-



environment, can expect and demand the proper content quality, WebTV providers are not at risk in this regard. Instead of setting up and using their own IP broadcasting networks, they opt to utilize the freely available Internet and pass on the problems of transmission speed, service availability and in most cases the nec-

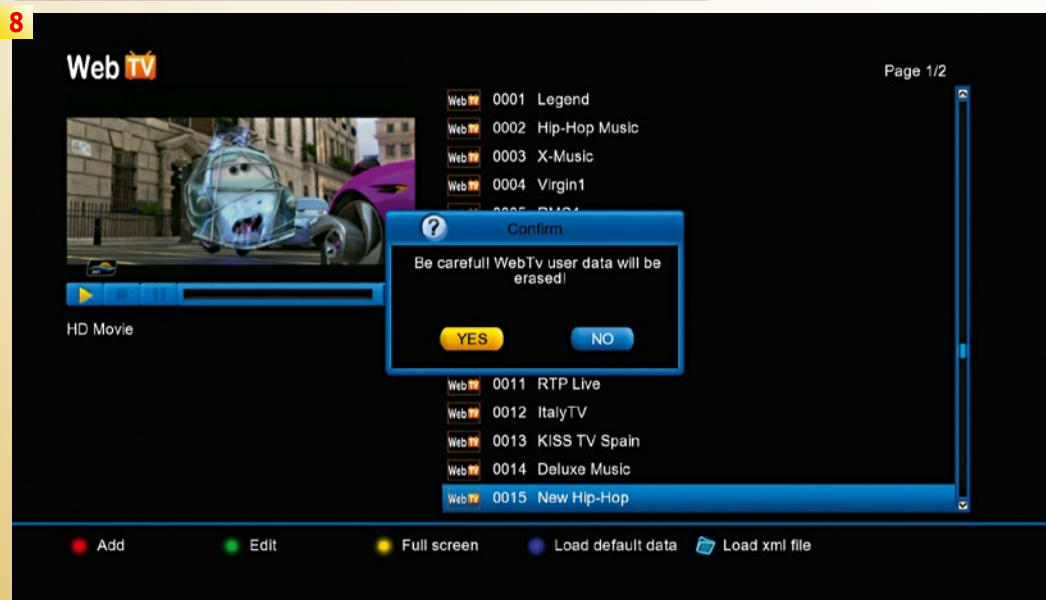

4. Depending on the WebTV broadcaster, the picture quality is average to very good; there's nothing to object to here

5. The individual WebTV stations can be edited directly from the receiver


6. New WebTV stations can be added with the push of just one button

7. Regardless of whether it's music, movies, sports or adult-oriented content, Web-TV has something for everyone

8. Currently, there's no standard channel list for WebTV available from Fulan, this will change in the future

9. Technical details of an HD stream via WebTV. The resolution is 720p while the signal is transmitted in MPEG4/H.264

10. An XML file with about two dozen WebTV channels

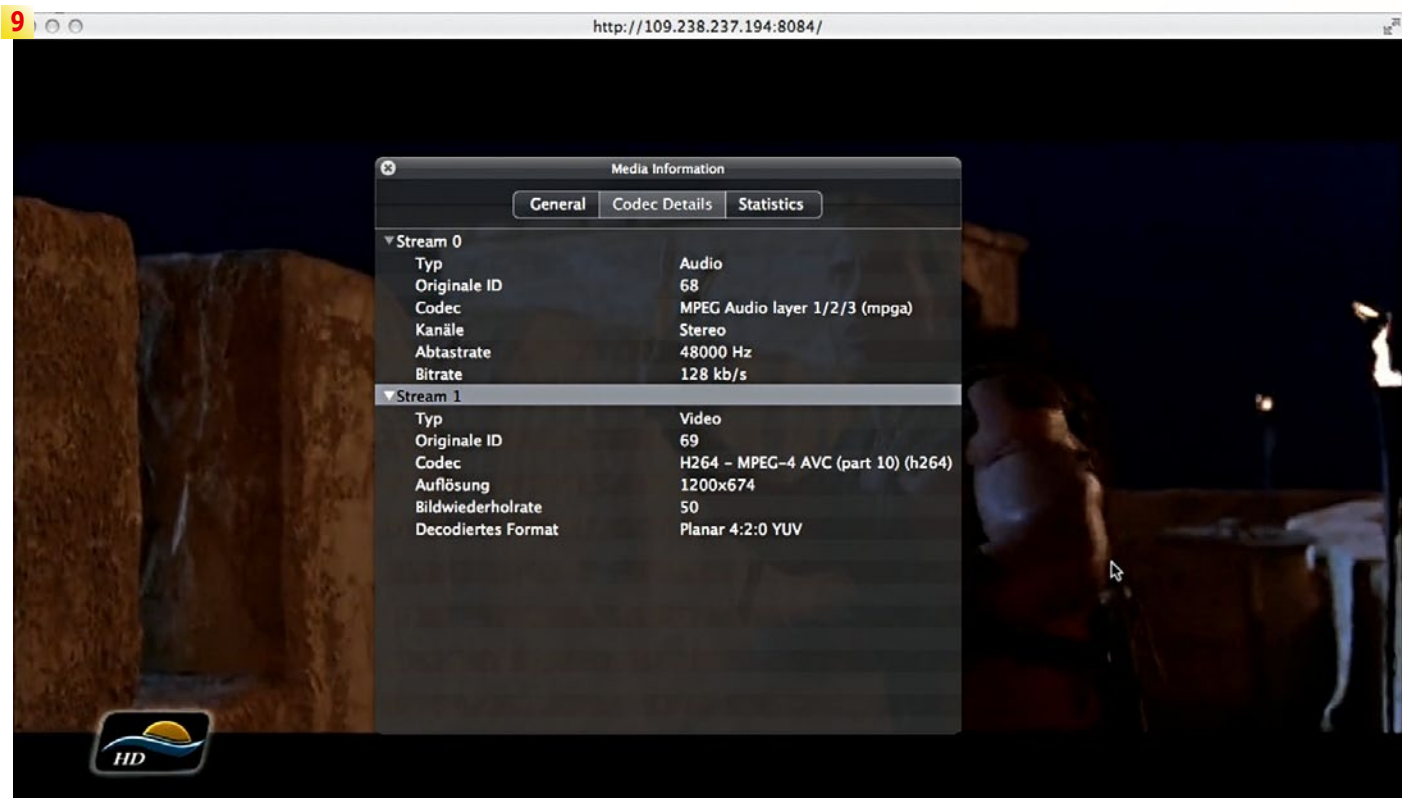

quency/channel list based on the planned marketing area, this task would be more difficult with WebTV. The available content is far too extensive and the wishes of the end-users are also far to individualized.

For our tests the first task was to start an Internet search. In just a few mouse clicks we found a multitude of complete lists with interesting channels. It included news reports, sporting events and music channels as well as sub-channels, HD and 3D movie broadcasters and even adult-oriented content. The URLs from all of these broadcasters are in an XML file; it's a familiar file format from the Inter-


net that allows the representation of hierarchically structured data in a cross-platform text file. Such an XML file can be displayed and edited with most text editors without any problems (Note: text editor programs can only be used if the text itself is not formatted). The pictures in this test report show an example of one of these XML files that contain several dozen interesting WebTV entries. To feed your Spark receiver with this XML file you simply need to save the file to a USB storage device, connect it to your Spark receiver and then press the 'Load' button on the remote control. You can also load the XML file directly from

the Internet using the FTP function in the Spark software.

Of course, you can also edit the channel list directly from the receiver; the green function button will help you get started here or you can add a new WebTV channel using the red function button. The Spark software always blends in the channel list on the right side of the OSD while the desired WebTV channel is shown in a smaller window on the left side. This gives the user a quick overview of what channel or program is of interest at the moment. Once you've found the desired channel, a simple push of the yellow function button

brings the selected WebTV channel to full-screen display.

The picture quality from one channel to another varies greatly, ranging from perfect HDTV to pixilated SDTV. Once again the difference between IPTV and WebTV can clearly be seen. With IPTV, the programming provider makes sure that every channel in the package reaches the end-user in the same quality. With WebTV, factors such as the bandwidth of the Internet connection, the number of viewers and even the budget of the WebTV broadcaster can affect the end-user's picture quality. All in all though, we were able to

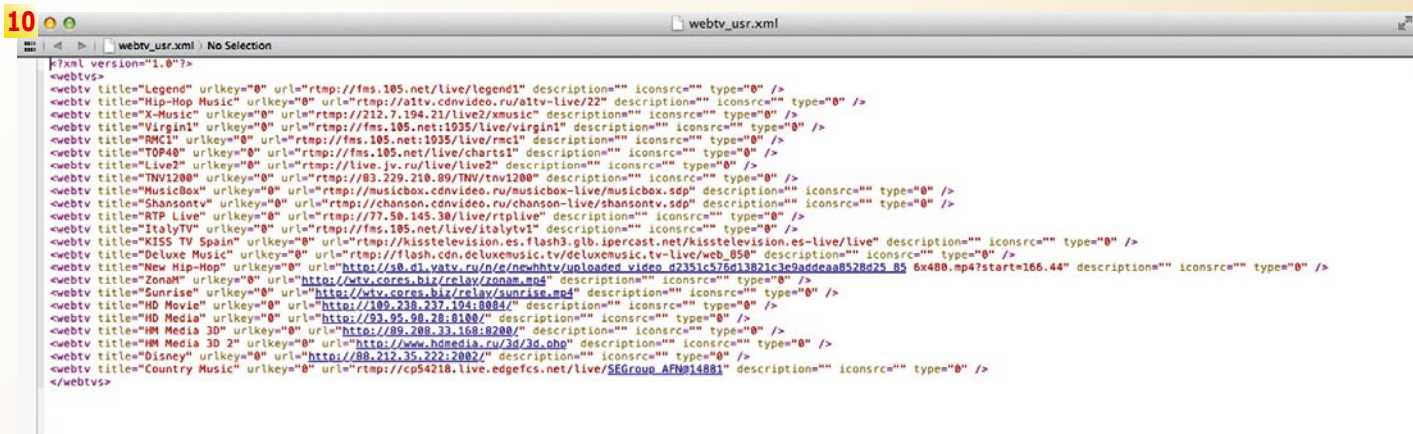

determine that the picture and audio quality of the individual channels ranged from very good to acceptable. To play back SD content, your Internet download connection should be at least 1.0 Mb/sec while for HD content it should be at least 3.0 Mb/sec.

The Spark software's WebTV function supports the Flash format and MPEG4/H.264 in SD and HD. Keep in mind though, that you will need to know the URL of the WebTV stream. Content from the media sites of TV channels or clips from video platforms, even

when they happen to be in Flash format, can only be played back if you know the exact address of the desired stream. Unfortunately, many providers go to great lengths to hide these addresses from the end-users mostly because they don't want to jeopardize any ad

looking for an alternative to TV reception via the three classic methods of satellite, cable or antenna, you'd have to go the IPTV route. WebTV is a practical and, above all, mostly free way to watch TV channels via the Internet but there's no guarantee that the same channel you were watching today will be there tomorrow, and if it is still there, its quality is not guaranteed. Another thing to watch out for is that the channels in some of the WebTV lists are possibly being redistributed illegally. In the course of our testing we discovered one WebTV list with dozens of Russian-language TV channels - all being redistributed over one server - that we managed to localize to the Ukraine. Included in the list of channels, in addition to Russian legal/public and private broadcasters, were other familiar channels such as MTV. It's fairly safe to assume that these streams were being redistributed without the owner's permission. And sure enough, when we tried to access the server just before our deadline, it could no longer be reached.

In the end though, it was for us a lot of fun to dive into the world of WebTV but it still remains just an expansion of all the other reception methods. We also liked that the picture quality of the individual channels was on average quite appealing and thanks to the logical and easy use of the Spark software, WebTV is definitely interesting for professionals and beginners alike.

- 11. 3D channels are also available via WebTV for free
- 12. Music channels of all different styles are also available
- 13. With X-Music, the name says it all

11




12



income that they would receive from their own web site.

So, is WebTV an alternative to TV reception via satellite, cable or antenna? At the end of a test report like this, you'd undoubtedly be asking yourself that very question. Our simple answer to that is 'No'. If you're

13

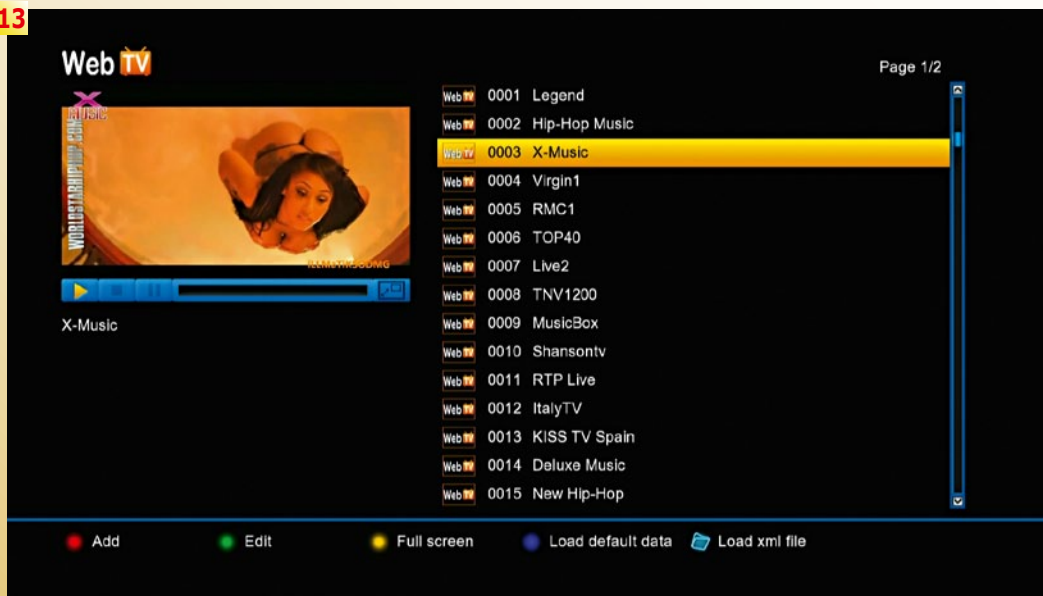

HORIZON

For a reliable solution!

Winners of the Queen's Award for international Trade 2007, Horizon Global Electronics is a UK Company established in 2001 specialising in the design and manufacture of hand held test equipment for the digital satellite and TV sector. Our strength lies in being able to find innovative solutions to leading technology issues.

HORIZON DOES IT AGAIN WITH THE ALL NEW HD-T2!

Horizon's newest product, the HD-T2, combines a collection of impressive qualities to create the world's first stand alone DVB-T2 installer's meter.



- This meter will have the familiar look and feel of the Horizon range with simplicity being the key characteristic. It's easy to use layout feels comfortable from start to finish, giving a broad range of accessibility to all. As with all Horizon meters the end user has the ability to set the menu for a novice, right up to advanced precision with data that can be logged and download into an excel spreadsheet.
- The HD-T2 utilizes an all new hardware and firmware platform with features not found on a meter of this calibre before and at 1.2 kg it won't break your back or bank balance!
- Horizon has strived to build a cost effective solution for installers that offers real time readings on analogue, digital and now high definition digital DVB-T2. In addition the ability to read DAB/FM signals with full spectrum mode and rotating constellation along with all the tools the installer will need as the new DVB-T2 system becomes live, leads to create a product that offers a broad range of technological features.

BBCB Ch.21
No offset SISO
QAM-64 32k Guard 1/8
Network12320 Cell 2945
DVB-T2 Parameters

Ch. 41
658 MHz
DVB-T2
Active PLP
QAM-256R



Phone:
+44 (0)1279 417005

Email:
sales@horizonhge.com



DEALERS AND DISTRIBUTORS WANTED

www.horizonhge.com

The Wonderful World of Spark



Part 1: YouTube

Read Full Report



www.TELE-satellite.com/12/03/spark

FEATURE
頂級數位電視接收工程技術

Spark Receiver Software |

The Wonderful World of Spark

Part 1: YouTube

- Perfect receiver software integration
- Excellent filter function, for example, just HD videos
- Multiple built-in virtual keyboards
- Sophisticated search function
- Easy Saving of video clips

Part 2: KartinaTV

Read Full Report



www.TELE-satellite.com/12/05/spark

FEATURE 功能特点: 无缝集成IPTV在卫星接收器中 | Spark Receiver Software |

The Wonderful World of Spark



Part 2: KartinaTV

- seamless integration of IPTV in satellite receiver
- compatible with HDTV and 3D TV
- automatic PVR integration for IPTV
- user-friendly on-screen menus
- perfectly matched to content provider

82 The Spark Receiver Software - The Wonderful World of Spark - 01-05-2012 - www.TELE-satellite.com 83

Part 3: Spark Apps

Read Full Report



www.TELE-satellite.com/12/07/spark

FEATURE 功能特点: 直接访问附加媒体服务 | Spark Receiver Software |

The Wonderful World of Spark



Part 3: Spark Apps

- Direct access to additional media services
- Own Wikipedia App
- Integrated Twitter service
- Interesting highlight: direct access to delivery services
- Complete Internet access via a browser

74 The Spark Receiver Software - The Wonderful World of Spark - 01-07-2012 - www.TELE-satellite.com 75

Part 4: Web-TV

Read Full Report



www.TELE-satellite.com/12/09/spark

FEATURE 功能特点: 广泛的免费频道 | Spark Receiver Software |

The Wonderful World of Spark



Part 4: Web-TV

- wide range of free channels
- Web TV offers SD, HD and 3D programs
- simple manual edit the services list in Spark
- Spark software displays all the technical parameters of the web TV program


74 The Spark Receiver Software - The Wonderful World of Spark - 01-10-2012 - www.TELE-satellite.com 75



Part 3: Plugin Installation



AZBOX *me*

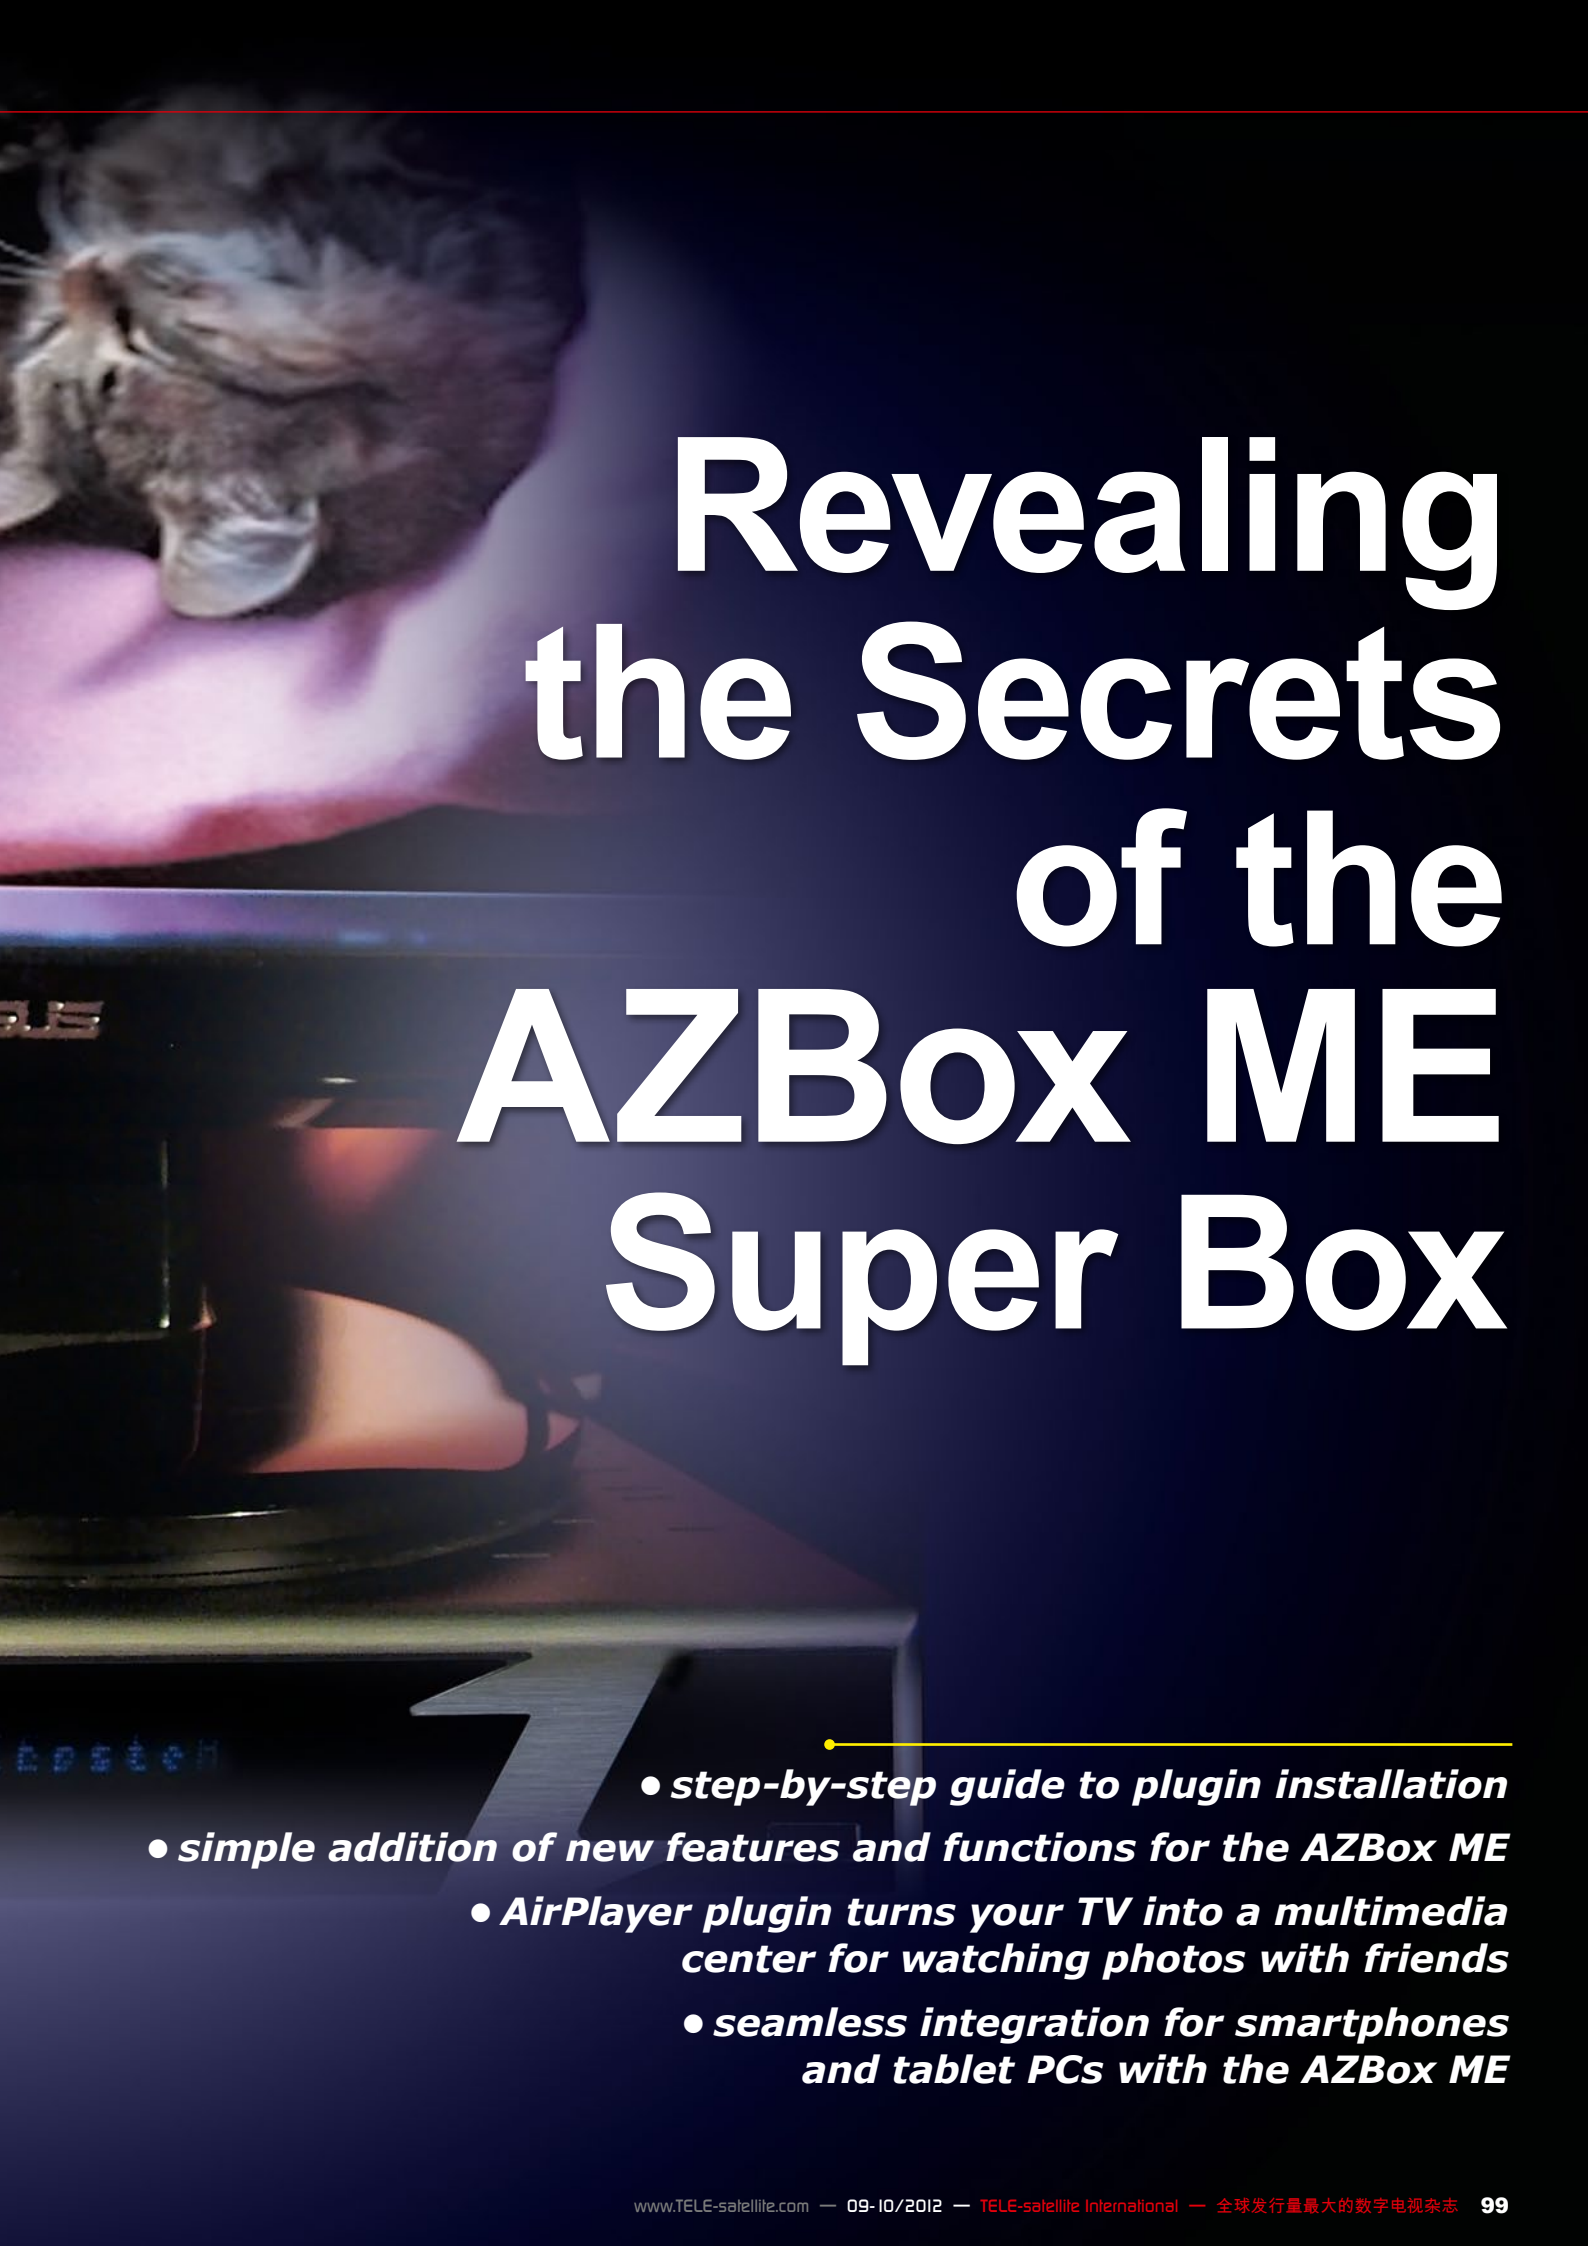

Revealing the Secrets of the AZBox ME Super Box

- *step-by-step guide to plugin installation*
- *simple addition of new features and functions for the AZBox ME*
- *AirPlayer plugin turns your TV into a multimedia center for watching photos with friends*
- *seamless integration for smartphones and tablet PCs with the AZBox ME*

AirPlayer Plugin for the AZBox ME

Vitor Martins Augusto

One of the aces up the sleeve of Linux receivers such as the AZBox ME is the option of installing new plugins and thereby adding new functions and features. Keep reading to find out how.

Many Linux distributions come with an integrated download function which allows installation of a range of plugins at the touch of a button on the remote control. A closer look at those download menus, however, reveals that by default the AZBox ME offers only certain plugins for download.



There's a simple reason for that: A lot of plugin servers for Linux receivers don't only host legal OpenSource plugins, but also illegal offerings. It's only logical that the original firmware does

not provide links to those servers.

What this does not mean, however, is that you can't make use of all the legal plugins hosted on such servers. You only need to know

How to find out the IP Address

1. Need to find out your AZBox ME's IP address? Look it up in the Setup menu.
2. Then select System.
3. From there proceed to the Network sub-menu.
4. And finally choose Adapter Settings to...
5. ...find out the current IP address.

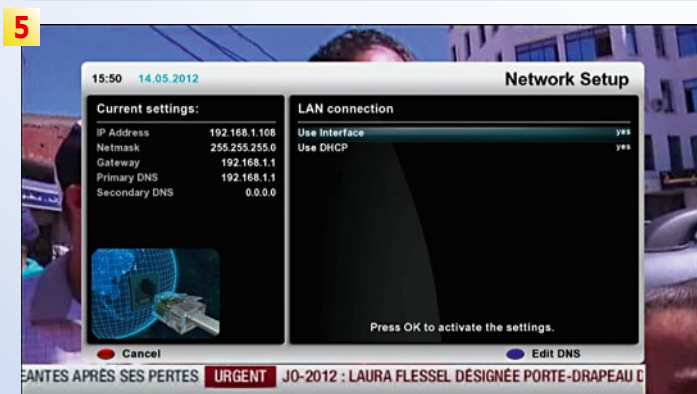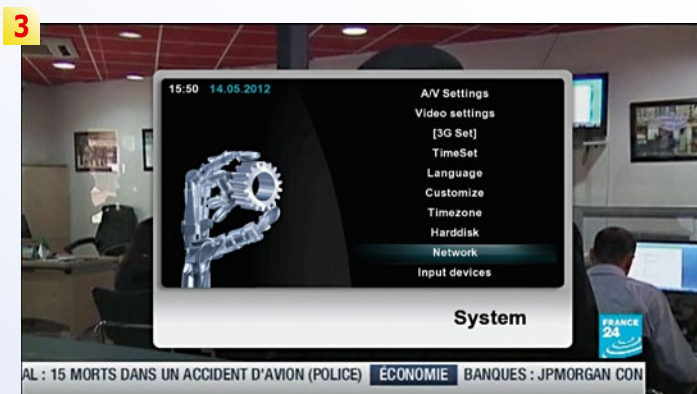

The USB-2 VHF/UHF Modulator that can drive any receiver



DTU-215-GOLD



**Connect to your PC...
and test drive any
cable or terrestrial
digital-TV receiver**

**Fully agile from
36 to 1002MHz**

**Channel simulator
included**

DekTec's USB modulator DTU-215-GOLD is an option-packed compact modulator that can cope with any cable or terrestrial modulation standard used throughout the world, including DVB-T2, DVB-C2 and ISDB-T. The modulator comes with streamer software that can run on a PC or laptop. The RF output of the modulator can be connected directly to the antenna input of a digital-TV receiver. As it is powered from the USB-2 bus, no external power adapter is required. This modulator is the ideal tool for demonstrations, research and development and to test drive setup boxes and decoders. For more information visit our website where you also will find our local resellers worldwide.

DeKtec
www.dektec.com

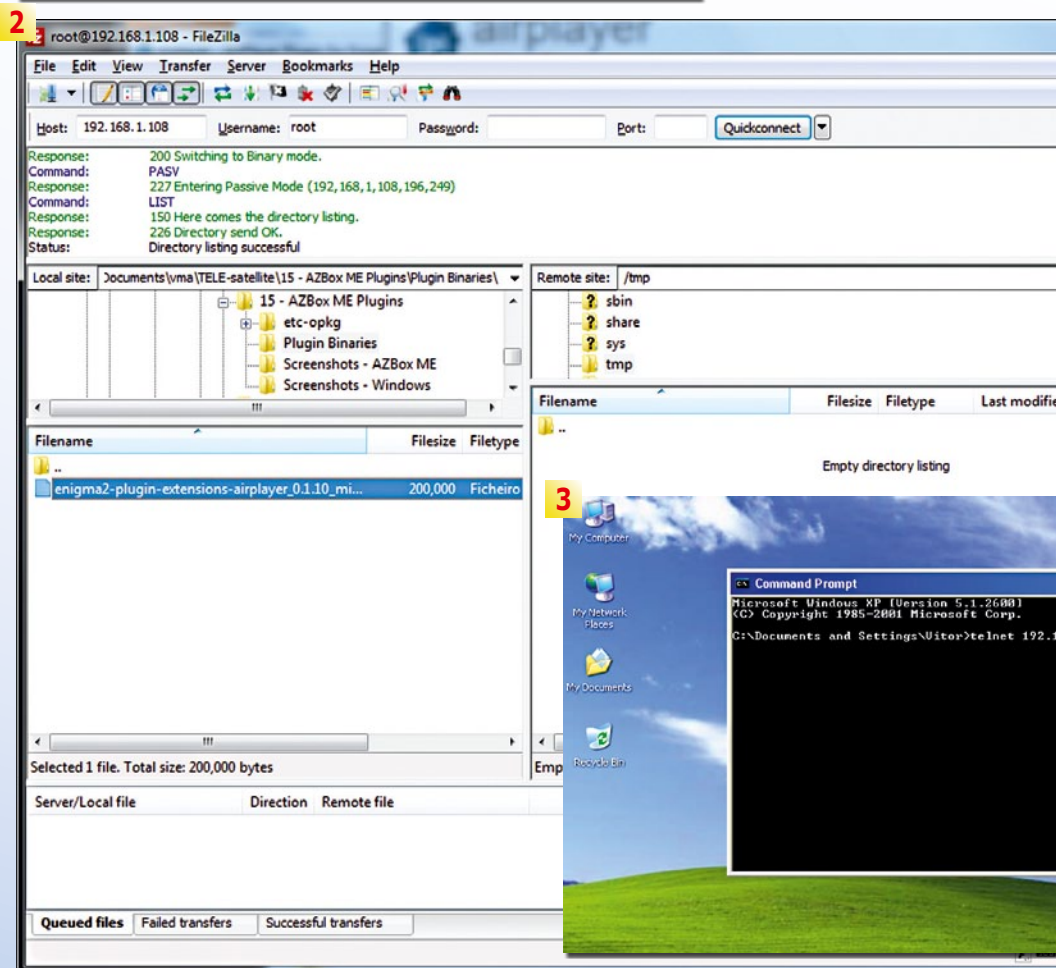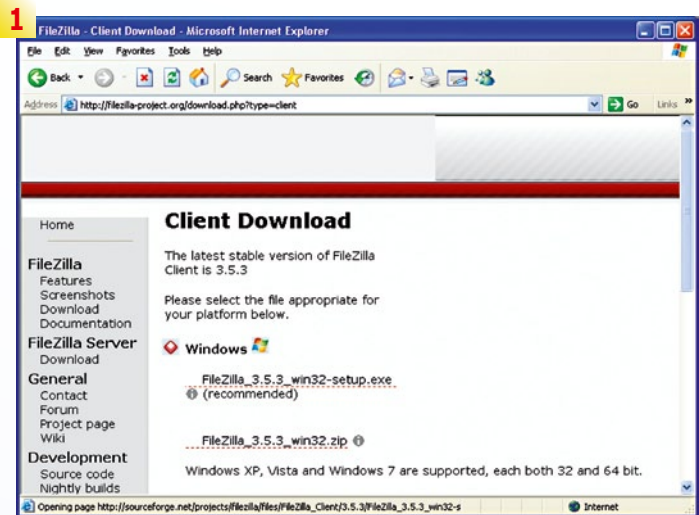

how to do it, and we'll show you exactly that with the example of the AirPlayer plugin.



This is a great plugin for presenting photos directly on the TV panel from an iPhone, iPod Touch or iPad. The first thing you need (apart from all the hardware, that is) is the plugin itself.

As always, a Google search for 'airplayer' is the best starting point and will

yield numerous links to the readily compiled plugin. You should, however, make a point of downloading the 'mipsel' version, since this is supported by the AZBox ME processor. For a current version please go to <http://code.google.com/p/airplayer/>.

In addition to the plugin itself you need an FTP client. At our test centre we use FileZilla, which is a fully-fledged FTP client that is not only totally free but also small in size and very capable. Once again, Google will help you find a download link for that software.

Finally, we have to establish a direct connection to the AZBox ME via Telnet. For those of you not familiar with Telnet, this is a protocol that allows access to the receiver using command lines. Linux is Unix-based, and with Unix it is customary to work with command lines. Telnet is required for exactly that, since

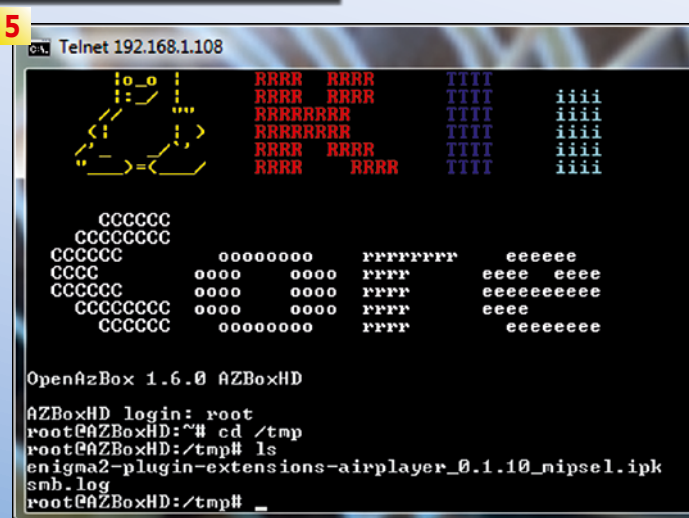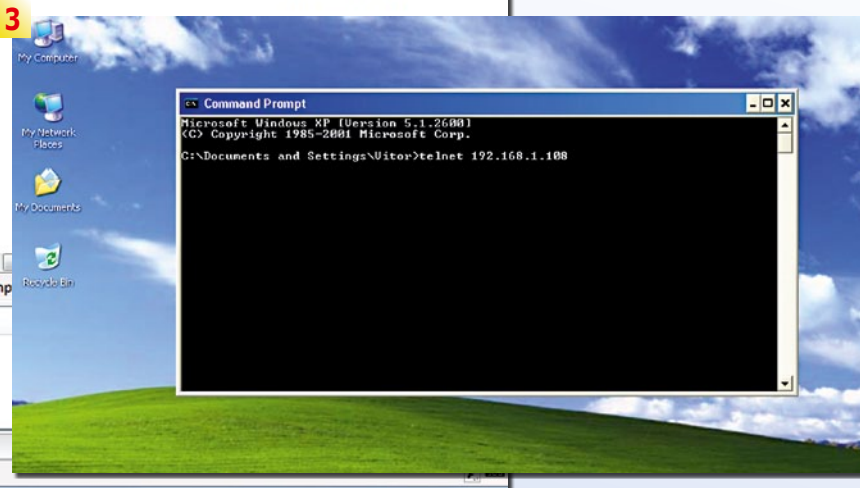

menu of the receiver. Simply go to Setup, then select System, followed by Network and finally Adapter Settings. This will give you the correct IP. If you see 0.0.0.0 this means you first need to go about configuring your local network before you are able to proceed.

Apart from an IP address FileZilla requires a username with corresponding password before it will establish an FTP connection. Connection data can be set up permanently or you may choose to use the upper line to create a 'Quickconnect' session. We use this field to enter the IP address of our AZBox ME, 'root' as the username and we leave the password field empty. This should work, unless a password was specifically set by the user via Telnet.

This set up should allow us to connect to the AZBox ME and the first thing we will see is the base directory. From here, a double click on 'tmp' will lead us to the /tmp directory, which is right where we belong at this stage. The link section of the FileZilla window displays the directory structure of the PC which means it is possible to drag and drop files from any directory of the PC to the /tmp directory of the receiver.

Next, we call up a DOS

What follows next is a request to enter the username (root) and password (press ENTER to leave that field empty) in order to access the home directory. Again, we need to change from there to the /tmp directory, which can easily be done by keying in 'cd/tmp'. To the left of the cursor the currently selected directory is shown and at this stage this should read root@AZBoxHD:/tmp#.

You might ask yourself what the *.ipk file extension stands for. IPK means that files of this type are managed by the so-called Itsy Package Management System which makes sure that all files are automatically copied into the correct directory of the AZBox ME. In case runtime libraries are not available the installation routine is interrupted and

In order to install the IPK file on the AZBox the following `ipkg` command has to be entered:

```
Ipkg -install enigma2-  
plugin-extensions-airplay-  
er_0.1.10 mipsel.ipk
```

Once the plugin has been installed it is necessary to re-start the receiver. In most cases it will even suffice to re-start the user interface only. At last the time has come to try out the new plugin. And what an awesome plugin it is. Simply take your iOS device (no matter whether it's an iPhone, iPod or iPad), open a photo, click on the Airplay icon, select the receiver (Air-Player E2) and as if by magic the photo will appear on the TV. The same also works for videos, even though at this stage the sound is unfortunately missing.

Obviously, your iOS device must use the same WiFi network as your AZBox ME for all this to work, but in most environments this is the case anyway.

Thanks to this plugin the AZBox ME can easily become the centre for a slideshow

```
Telnet 192.168.1.108
```

```
"_)=<_/
RRRR   RRRR   TTTT   iiii
RRRR   RRRR   TTTT   iiii

CCCCC
CCCCCC
CCCCC
CCCC      00000000    rrrrrrrr    eeeee
CCC       0000      0000    rrrr     eee eee
CCCCCC    0000      0000    rrrr     eeeeeeee
CCCCCCCC  0000      0000    rrrr     eee
CCCCC     00000000    rrrr     eeeeeee

OpenAzBox 1.6.0 AZBoxHD

AZBoxHD login: root
root@AZBoxHD:~# cd /tmp
root@AZBoxHD:/tmp# ls
enigma2-plugin-extensions-airplayer_0.1.10_mipsel.ipk
smb.log
root@AZBoxHD:/tmp# ipkg install enigma2-plugin-extensions-airplayer_0.1.10_mipse
l.ipk
Installing enigma2-plugin-extensions-airplayer <0.1.10> to root...
Configuring enigma2-plugin-extensions-airplayer
root@AZBoxHD:/tmp# _
```




1. Website for downloading FileZilla, a top-notch FTP client that is available as freeware.
2. The plugin is copied to the AZBox ME with the help of FileZilla. We have chosen Quickconnect and entered the IP address and username in the top line. A password is not required.
3. Then we start a Telnet session in the DOS window.
4. Once again we need to enter the username. And once again a password is not required – just press ENTER.
5. We now use the cd command to go into the /tmp directory. With the ls command we can call up all files inside that directory.
6. The ipkg command finally installs the plugin. The install option is also entered.

Using iPad and iPhone with AirPlayer Plugin

1. If you tap on the shown photo the AirPlay icon appears in the top right corner. Here you select the required AirPlay server that will receive the photo or video.

2. Of course it works just as nicely with the iPhone.

3. If the plugin is installed correctly the AZBox ME will act as AirPlay server.

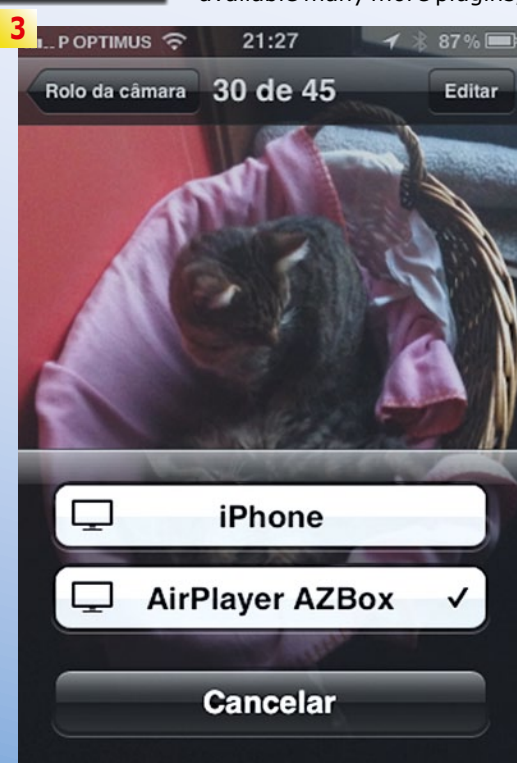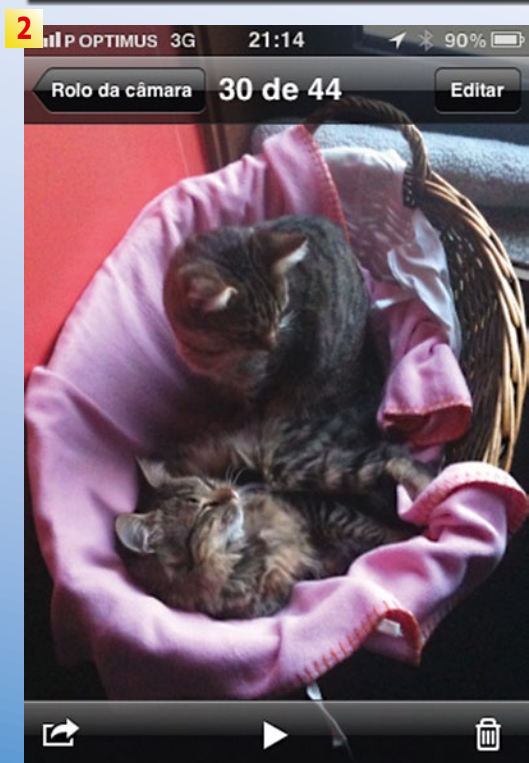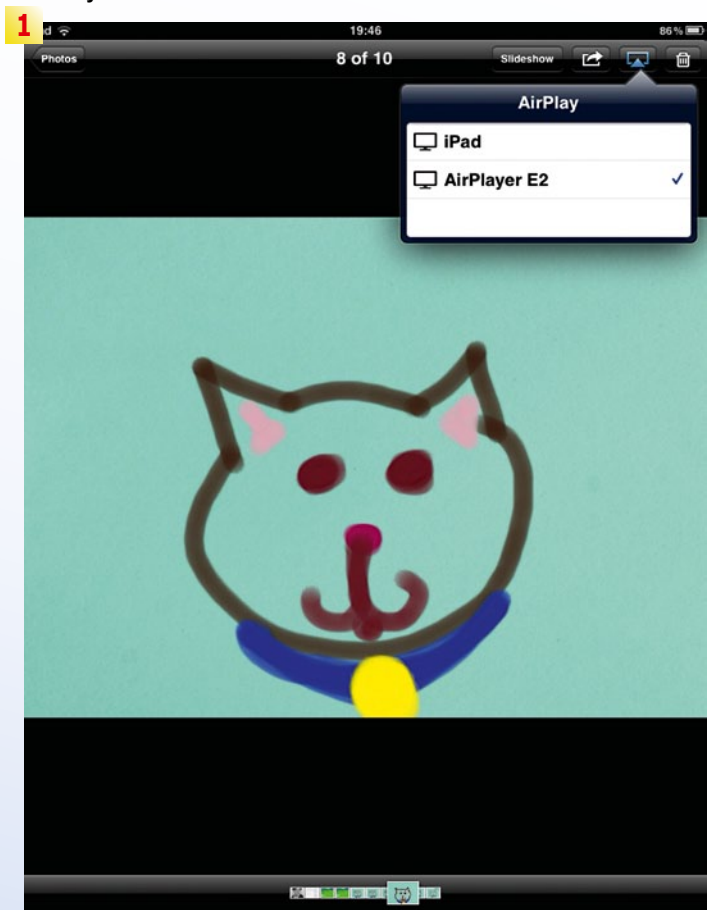

presentation with friends, where anybody with an iOS device or Android mobile/tablet can show their pictures and videos on the TV. In a word: brilliant!

This example goes to show that manual plugin installation is nothing to be afraid of. There is, however, another option that is even more convenient: All you need to do is copy another file with the extension *.conf into the /etc/opkg directory of the AZBox ME. This CONF file contains information as to where the plugin server is located. This way it even becomes possible to tap into plugin servers of other firmware versions.

The *.conf file can be named as you like and consists of a command line with the following format:

```
src/gz openpli-azboxme  
http://downloads.rsi-images.org/feeds/openpli-2.1/azboxme/azboxme
```

If, for example, you create a text file with this line using Notepad on your PC, save it under 'test.conf' and copy it to the /etc/opkg directory of the AZBox ME using FTP. All of a sudden there will be available many more plugins,

skins, system extension etc. when you press Manage Extensions (red button on the remote) in the Plugin menu.

A little bit of patience and some hunting instincts will give you many more plugin and extension servers thanks to Google, and even if a plugin you want to have is not available in any repository you can always decide to install it manually – now that you know how to do it.

A word of caution: We all now from experience that we sometimes go overboard with software experiments, and AZBox ME plugins are no exception. It may happen that the operating system is damaged and the receiver will not re-start.

In such a case renewed flashing of the firmware will quickly get you out of trouble.



Owners of the AZBox ME in particular need not worry too much: Their box comes with a switch on the back panel which can always program a working bootloader into the flash memory. For more details about that handy feature see our AZBox ME test report in TELE-satellite 02-03/2012.

The only thing you have to take very seriously is a backup of all settings, which you should always create before you start experimenting. Now that you know all about FTP it is child's play to copy the entire /etc/tuxbox directory to the PC in order to have a backup of your channels lists. If things go astray on the AZBox ME you only need to copy that directory onto the receiver and all is well and good again.

Conclusion: Even all by itself the AZBox ME is a great device. But if you make use of available plugins and system extensions which can be installed manually or from dedicated plugin servers you enter a whole new world of virtually endless possibilities for your AZBox ME.



Using iPad and iPhone with AirPlayer Plugin

1. As soon as the AZBox ME has been chosen as AirPlay server the photo on the iPad display will also appear on the TV panel.
2. It does of course also work that way with the iPhone.

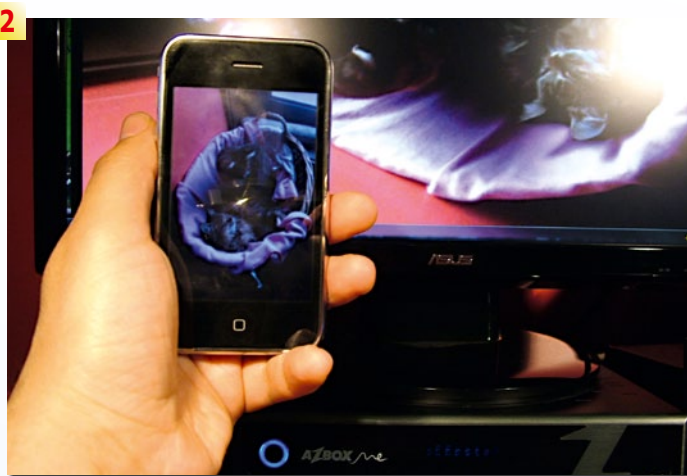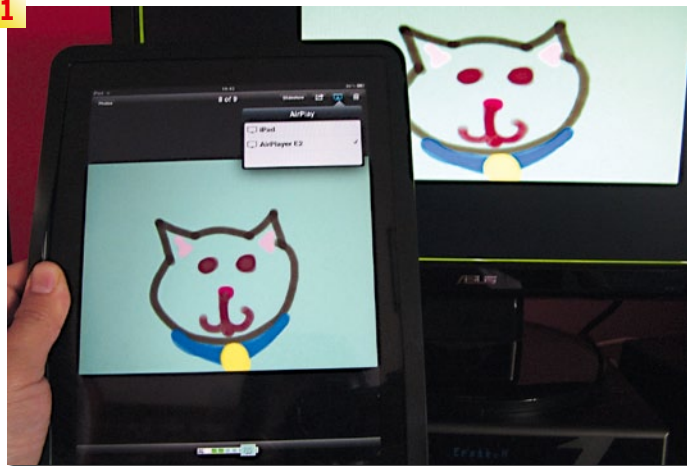


Starting the AirPlayer Plugin

3. After successful installation of the AirPlayer plugin and a re-start of the receiver the AirPlayer plugin will appear on the list of available plugins.
4. If you activate the plugin you can initiate the AirPlayer service and also make changes to its settings, if required.
5. Once the plugin indicates that the service is active you may use your iPad or iPhone to send pictures and videos from your mobile device directly to the AZBox ME via your WiFi network, and from the receiver to your TV.
6. The picture that is currently selected is presented on your panel without further ado!

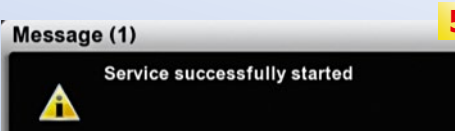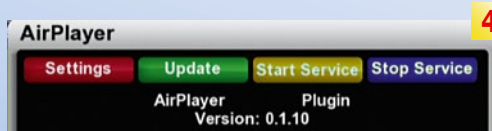

Using Custom Plugin-Server

7. The plugin menu does not only give you access to all installed plugins, but theoretically also allows convenient installation of new plugins that are downloaded from a dedicated plugin server.
8. You need to go to the Manage Extension menu item, which can be called up with the red button on your remote control.
9. Now it is possible to manually set up plugin servers. The receiver then checks all these for available files and creates a list with all plugins, skins, channels lists etc. that can be downloaded from those servers.
10. You can select any number of plugins, all of which will be installed or uninstalled automatically at the end of the routine.

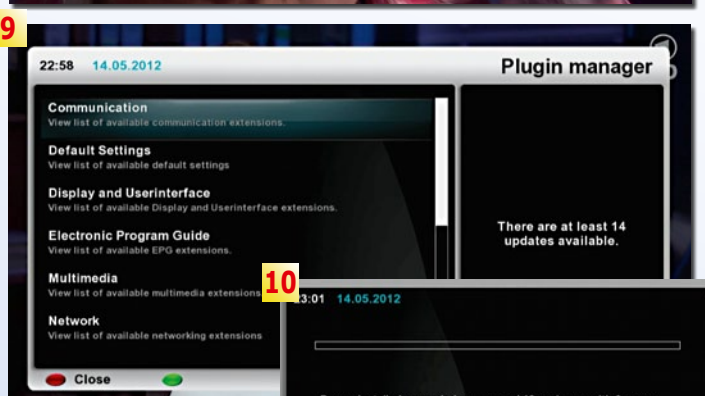

Revealing the Secrets of the AZBox ME Super Box



Part 1: Blindscan

Read Full Report



www.TELE-satellite.com
/12/05/azbox-me

FEATURE 功能强大 不兼容 兼容工 程师 所 需

AZBox ME Receiver Software

Revealing the Secrets of the AZBox ME Super Box

Service Scan Blind

Astra 1H/1KR/1L/1M/2C (19.2E)
DVB-S2 8PSK 10773H / 22000 / 3/4
scan in progress - 66% done! 781 services

EXTREME SPORTS
MOTORS TV
EQUIDIA LIFE
DATA SYSTEM[88]
12581V SID 0x2522
ANIXE HD
NICK/C/C HD
N24 HD
QVC HD
HSE24 HD

Service Scan Blind

Scanning from: 1970 kHz
It may take several minutes
Progress: 100% done! 14 frequencies

4700 Mhz SymbolRate: 21999102
5850 Mhz SymbolRate: 21999852
6000 Mhz SymbolRate: 21999428
6000 Mhz SymbolRate: 21999785
6000 Mhz SymbolRate: 21999640
6000 Mhz SymbolRate: 21999282
6000 Mhz SymbolRate: 21999362
6000 Mhz SymbolRate: 21999800
6000 Mhz SymbolRate: 21998794
6000 Mhz SymbolRate: 21999550

Part 1:
Blindscan

- automatically looks for all active transponders
- also detects channels with very low symbol rate
- makes full use of the AZBox ME tuner's capabilities
- finds all active channels
- blind scan mode currently in beta mode

Part 2: Multimedia

Read Full Report



www.TELE-satellite.com
/12/07/azbox-me

FEATURE 功能强大 不兼容 兼容工 程师 所 需

AZBox ME Receiver Software

Revealing the Secrets of the AZBox ME Super Box

My Videos
My Music
My Pictures
My UPnP

easy integration in media network at home
• receiver shows films, plays music and displays images
• subtitles can be inserted for movies
• playlists can be set up for music

Part 2:
Multimedia

Part 3: Plugin- Installation

Read Full Report



www.TELE-satellite.com
/12/09/azbox-me

FEATURE 功能强大 不兼容 兼容工 程师 所 需

AZBox ME Receiver Software

Revealing the Secrets of the AZBox ME Super Box

Part 3:
Plugin-
Installation

- Step-by-step guide to installing plugin
- simple extension of the functions of the AZBox ME
- AirPlayer plugin transforms the TV set for the photo shows with friends
- Integration with the AZBox smartphones and tablets

AWARD WINNING

**DIGITAL
RECEIVERS OF
21ST CENTURY**

这些是获得最高奖的产品





Manufacturer	AZBox
Website	www.azbox.com
Function	HDTV DVB-S2 Miniature HDTV Linux Receiver with Multimedia Features
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3 / USALS
S-Video/HDMI	— / •
Scart/Digital Audio	— / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/09/azbox-mini-me
Read TELE-satellite Test Report



Manufacturer	Amiko
Website	www.amikostb.com
Function	DVB-S2 / DVB-T & DVB-C Triple Tuner PVR Receiver
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/07/amiko
Read TELE-satellite Test Report



Manufacturer	Panodic
Website	www.panodic.com
Function	Small DVB-T HD PVR Receiver
DVB-S2/LAN	— / —
DiSEqC	—
S-Video/HDMI	— / •
Scart/Digital Audio	• / —



PANODIC



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/07/panodic
Read TELE-satellite Test Report



Manufacturer	Skyworth
Website	www.skyworthdigital.com
Function	Very small DVB-T PVR Receiver with HDMI
DVB-S2/LAN	— / —
DiSEqC	—
S-Video/HDMI	— / •
Scart/Digital Audio	— / —



SKYWORTH



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/07/skyworth
Read TELE-satellite Test Report



Manufacturer	Amiko
Website	www.amikostb.com
Function	DVB-S / DVB-S2 & DVB-T Combo Receiver with PVR
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/12/05/amiko
Read TELE-satellite Test Report



AMIKO



Manufacturer	Skyworth
Website	www.skyworthdigital.com
Function	Very small DVB-S2 PVR Receiver with HDMI
DVB-S2/LAN	• / •
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	— / —



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/12/05/skyworth
Read TELE-satellite Test Report



SKYWORTH



Manufacturer	Panodic
Website	www.panodic.com
Function	DVB-T Mini Receiver with HDMI and PVR
DVB-S2/LAN	— / —
DiSEqC	—
S-Video/HDMI	— / •
Scart/Digital Audio	— / —



PANODIC



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/12/05/panodic
Read TELE-satellite Test Report



Manufacturer	AZBox
Website	www.azbox.com
Function	HDTV DVB-S DVB-S2 Linux Receiver with Multimedia Features and large Flash-memory for 3 Boot Images
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / USALS
S-Video/HDMI	— / •
Scart/Digital Audio	— / •



AZBOX



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/12/03/azbox-me
Read TELE-satellite Test Report



Manufacturer	Jiuzhou
Website	www.jiuzhou.com.cn
Function	DVB-S2, DVB-T PVR Digital Receiver
DVB-S2/LAN	• / •
Channel Memory	4000
PVR	•
S-Video/HDMI	• / •
Scart/Digital Audio	• / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/12/01/jiuzhou
Read TELE-satellite Test Report



JIUZHOU



Manufacturer	Skyworth
Website	www.skyworth.com.hk
Function	ISDB-T Receiver with PVR function
DVB-S2/LAN	— / —
Channel Memory	1000
PVR	•
S-Video/HDMI	— / •
Scart/Digital Audio	— / —



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/11/11/skyworth
Read TELE-satellite Test Report



SKYWORTH



Manufacturer	Jiuzhou
Website	www.jiuzhou.com.cn
Function	DVB-S2, DVB-S, DVB-T, PVR Digital Receiver
DVB-S2/LAN	• / •
Channel Memory	4000
PVR	•
S-Video/HDMI	• / •
Scart/Digital Audio	— / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/11/09/jiuzhou
Read TELE-satellite Test Report



JIUZHOU



Manufacturer	Amiko
Website	www.amikostb.com
Function	Digital HDTV DVB-S2 including dual boot
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/11/05/amiko
Read TELE-satellite Test Report



AMIKO



Manufacturer	Fulan
Website	www.fulansoft.com
Function	Digital HDTV Receiver with Dual-Boot and Spark online-platform
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	— / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/05/fulan
Read TELE-satellite Test Report



FULAN



Manufacturer	AZBox
Website	www.azbox.com
Function	Digital HDTV Receiver with DVB-S2 and DVB-T Tuners and various Multimedia & Internet Features
DVB-S2/LAN	• / •
Channel Memory	15000
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/01/azbox
Read TELE-satellite Test Report



AZBOX



Manufacturer	Jiuzhou
Website	www.jiuzhou.com.cn
Function	Digital PVR DVBT Receiver
DVBT/LAN	— / —
Channel Memory	1000
PVR	•
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/10/07/jiuzhou
Read TELE-satellite Test Report



JIUZHOU



Manufacturer	AZBox
Website	www.azbox.com
Function	HDTV DVBS2 receiver with various Multimedia & Internet Features
DVBS2/LAN	• / •
Channel Memory	15000
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite
Magazine
**Expert
Opinion**

www.TELE-satellite.com/10/05/azbox
Read TELE-satellite Test Report



AZBOX

CHINA



ALuoSat 阿罗卫视
Export Digital TV Products from China

LUO SHIGANG
President

#15, Feringa Str, 2nd Floor, Room D14
85774 Munich-Ufg, GERMANY

Tel: +49-151-40405196

Fax: +49-89-92185023

Email: luo.shigang@ALuoSat.de

Website: www.ALuoSat.de

LOOKING FOR A SET TOP BOX MANUFACTURER?

Contact ALuoSat
luo.shigang@ALuoSat.de

We help you find the manufacturer in China
that matches your needs and requirements

Contact us with your specifications and we
do the rest

ALuoSat 阿罗卫视
Export Digital TV Products from China

AWARD WINNING

21 **HDTV**
PC CARDS OF
21ST CENTURY

这些是获得最高奖的产品






TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/11/tenow

Read TELE-satellite Test Report

Manufacturer	Tenow International
Website	www.tbsdtv.com
Function	DVB-S2 PCI-E card with 4 tuners compatible with Windows and Linux operating systems
Channel Memory	unlimited
Satellite Memory	unlimited
Symbol Rates	1-45 Ms/sec (QPSK), 2-36 Ms/sec (8PSK)
DiSEqC	1.0, 1.1, 1.2, 1.3, 2.x

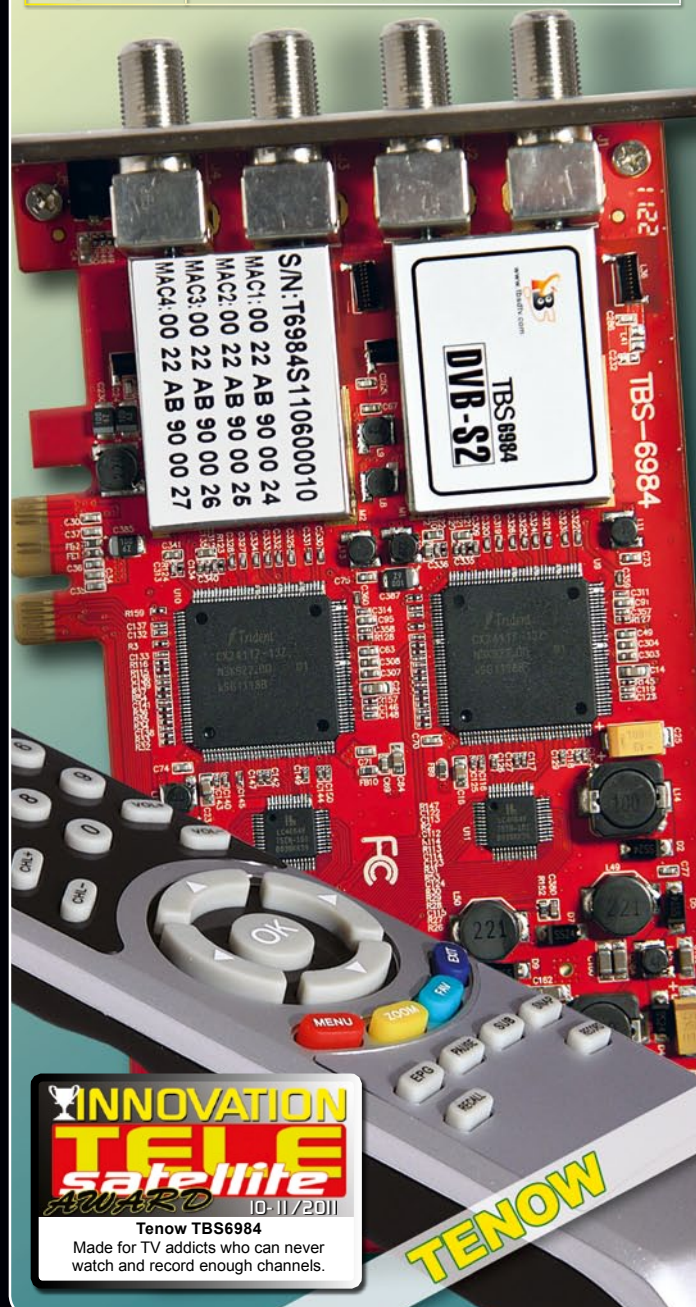



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/11/tenow
Read TELE-satellite Test Report

Manufacturer	Tenow International
Website	www.tbsdtv.com
Function	DVB-S2 PCI-E professional card with Blindscan function
Channel Memory	unlimited
Satellite Memory	unlimited
Symbol Rates	0.2-45 Ms/sec (QPSK), 0.2-45 Ms/sec (8PSK)
DiSEqC	1.0, 1.1, 1.2, 1.3, 2.x



TELE
satellite
AWARD 10-11/2011

Tenow TBS6925

Has every reception feature you could possibly ask for, plus blind scan. The card of choice for true die-hard professionals venturing to the extreme edges of satellite reception.

TENOW



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/11/tenow
Read TELE-satellite Test Report

Manufacturer	Tenow International
Website	www.tbsdtv.com
Function	DVB-T / DVB-T2 PCI-E card with 2 Tuners
Channel Memory	unlimited
Channel Bandwidth	6, 7, 8 MHz
FFT mode	1K, 2K, 4K, 8K, 16K, 32K
Center IF Frequency	3 ~ 5 MHz



TELE
satellite
AWARD 10-11/2011

Tenow TBS6280

Fit for the future thanks to impeccable DVB-T/T2 implementation.

TENOW



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/07/tevii
Read TELE-satellite Test Report


Manufacturer	TeVii Technology
Website	www.tevii.com
Function	PCI-E card for TV & Radio reception on the PC in SDTV and HDTV with two separate Tuners
Channel Memory	unlimited
Satellite Memory	178 preprogrammed - added by user: unlimited
Symbol Rates	2-45 Ms/sec
DiSEqC	1.0, 1.1, 1.2, 1.3



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/09/09/tevii
Read TELE-satellite Test Report

Manufacturer	TeVii Technology
Website	www.tevii.com
Function	PCI-E card for TV reception on the PC in SDTV and HDTV
Channel Memory	unlimited
Satellite Memory	177
Symbol Rates	2-45 Ms/sec
DiSEqC	1.0, 1.1, 1.2, 1.3

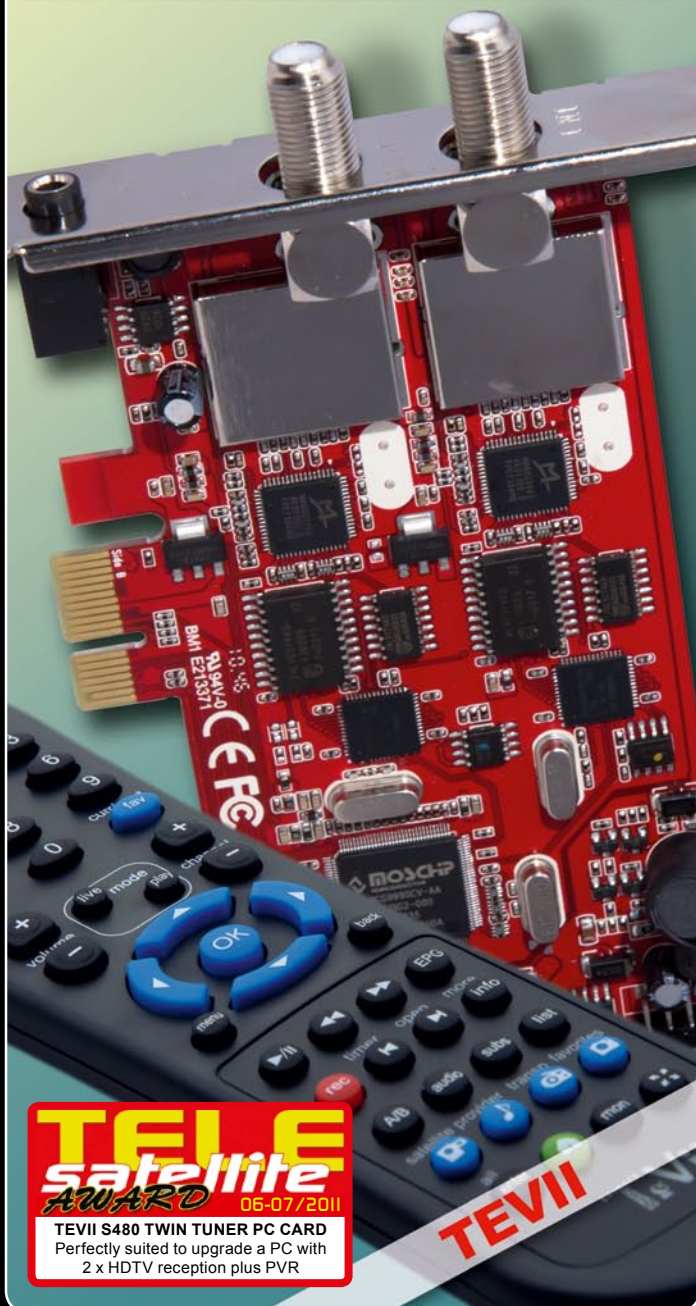

TELE
satellite
AWARD 05-07/2011

TEVII S480 TWIN TUNER PC CARD
Perfectly suited to upgrade a PC with
2 x HDTV reception plus PVR



TELE
satellite
AWARD 08-09/2009

TEVII DVB-S/S2
PCI-E CARD S470
An elegant solution for normal
and HDTV reception on a PC

AWARD WINNING

**SIGNAL
ANALYZERS OF
21ST CENTURY**

这些是获得最高奖的产品





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/09/lexium
Read TELE-satellite Test Report

Manufacturer	LEXIUM
Website	www.lexium-dvb.com
Function	Digital Satellite Meter with QuickSweep Technology
Frequency Range	950~2150 MHz
Video Output	—
Built-in Monitor	LCD display



LEXIUM FastAlign 5110Pro
Digital Satellite Meter
Helps enormously to install
any satellite dish



LEXIUM



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/09/deviser
Read TELE-satellite Test Report

Manufacturer	Tianjin Deviser Electronics Instrument
Website	www.devisertek.com
Function	Professional Meter for DVB-T, DVB-C and CATV (analog TV)
Frequency Range	5 ~ 1000 MHz
Video Output	—
Built-in Monitor	320 × 240 TFT display



DEVISER DS2400T
This is by far the best handheld measuring
instrument for DVB-T, DVB-C and
CATV I have come across. Deviser has
done an excellent job!

DEVISER



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/05/spaun
Read TELE-satellite Test Report

Manufacturer	SPAUN Electronic
Website	www.spaun.com
Function	DVB-S / DVB-S2 and DSS Signal Analyzer
Frequency Range	950-2150 MHz
Video Output	—
Built-in Monitor	4.3" TFT LCD display (16:9)



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/03/satcatcher
Read TELE-satellite Test Report

Manufacturer	SatCatcher
Website	www.satcatcher.com
Function	Digital and analog cable TV meter
Frequency Range	46~862 MHz (for digital TV) and 46~870 MHz (for analog TV)
Video Output	—
Built-in Monitor	120 x 64 3.5" LCD color display





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/01/horizon
Read TELE-satellite Test Report

Manufacturer	Horizon Global Electronics
Website	www.horizonhge.com
Function	Satellite and terrestrial antenna meter
Frequency Range	45~861 MHz (terrestrial) and 950~2150 MHz (satellite)
Video Output	—
Built-in Monitor	LCD display



TELE
satellite
AWARD 12-01/2012
Horizon HD-STM
Perfect choice for an installer who values
a practical instrument.

HORIZON



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/01/lexium
Read TELE-satellite Test Report

Manufacturer	LEXIUM
Website	www.lexium-dvb.com
Function	Digital Satellite Meter with AutoFind and QuickSweep features
Frequency Range	950~2150 MHz
Video Output	—
Built-in Monitor	LCD display



TELE
satellite
AWARD 12-01/2012
LEXIUM FastAlign 7100 Pro
Excellent
Dish Installation Tool

LEXIUM



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/01/deviser
Read TELE-satellite Test Report

Manufacturer	Tianjin Deviser Electronics Instrument
Website	www.devisertek.com
Function	Satellite Antenna Meter
Frequency Range	950-2150 MHz
Video Output	—
Built-in Monitor	LCD display



Deviser S20 Satellite Meter
Ideally suited to fastly install dishes



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/09/8dtek
Read TELE-satellite Test Report

Manufacturer	8dtek Technology
Website	www.8dtek.com
Function	Satellite Meter for Antenna Alignment
Frequency Range	L-Band (950-2150 MHz), DVB-S/S2 and analog signal
Video Output	A/V (composite + mono)
Built-in Monitor	Color graphic 16:9 LCD



8DTEK DSM DESIRED

A HDTV signal meter and receiver all in one with plenty of professional features





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/07/8dtek
Read TELE-satellite Test Report

Manufacturer	8dtek Technology
Website	www.8dtek.com
Function	Satellite Meter for Antenna Alignment
Frequency Range	L-Band (950-2150 MHz), DVB-S/S2 and analog signal
Video Output	Composite
Built-in Monitor	Color graphic LCD



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/07/satcatcher
Read TELE-satellite Test Report

Manufacturer	SatCatcher
Website	www.satcatcher.com
Function	Signal meter for digital signals in DVB-S, DVB-T and DAB. Analogue signals in FM radio.
Frequency Range	46~870 MHz
Video Output	Composite
Built-in Monitor	120 x 64 3.5" LCD color display





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/11/horizon
Read TELE-satellite Test Report

Manufacturer	Horizon Global Electronics
Website	www.horizonhge.com
Function	Antenna Alignment Meter
Frequency Range	950~2150 MHz
Video Output	—
Built-in Monitor	LCD display



HORIZON HD-S2
Extremely easy to use with an amazing
list of features for the pros



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/09/spaun
Read TELE-satellite Test Report

Manufacturer	SPAUN Electronic
Website	www.spaun.com
Function	TV Signal Analyzer with WiFi Receiver
Frequency Range	45~865 MHz (terrestrial) and 950~2150 MHz (satellite)
Video Output	RCA Composite
Built-in Monitor	7 inch 16:9 color LCD display



SPAROS 609 WIFI OPTION
Converts the signal analyzer to a
universally usable tool





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/09/horizon
Read TELE-satellite Test Report

Manufacturer	Horizon Global Electronics
Website	www.horizonhge.com
Function	Digital and analog terrestrial TV meter with spectrum analyzer and USB data output
Frequency Range	49~861 MHz
Video Output	—
Built-in Monitor	LCD display



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/07/satcatcher
Read TELE-satellite Test Report

Manufacturer	SatCatcher
Website	www.satcatcher.com
Function	Signal Meter for DVB-T, analogue TV, digital DAB radio, analogue FM radio
Frequency Range	46~870 MHz
Video Output	—
Built-in Monitor	120 x 64 3.5" LCD color display





TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/05/8dtek
Read TELE-satellite Test Report

Manufacturer	8dtek Technology
Website	www.8dtek.com
Function	DVB Signal Meter with tv monitor for DVB-S and DVB-T
Frequency Range	950~2150 MHz (satellite) and UHF/VHF (terrestrial)
Video In/Output	RCA/RCA
Built-in Monitor	3.5" LCD color display



8DTEK



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/01/horizon
Read TELE-satellite Test Report

Manufacturer	Horizon Global Electronics
Website	www.horizonhge.com
Function	Handheld Satellite Meter for fast and easy Dish Alignment
Frequency Range	950~2150 MHz
Video Output	—
Built-in Monitor	128x64 Pixel LCD



NANOSAT



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/10/01/optiscan
Read TELE-satellite Test Report

Manufacturer	Global Invacom
Website	www.globalinvacom.com
Function	Signal Analyzer with an Optical Input
Frequency Range	950(160)~2150 MHz
Optical Range	+10 to -25 dBm
Video Output	—
Built-in Monitor	Eight-digit LCD display



OPTISCAN



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/09/11/horizon
Read TELE-satellite Test Report

Manufacturer	Horizon Global Electronics
Website	www.horizonhge.com
Function	Satellite Meter optimized for Ka-Band
Frequency Range	950~2150 MHz
Video Output	—
Built-in Monitor	LCD display



HORIZON

Transponder Streams

for testing STB and headends

ATSC

DTMB

DVB-C

DVB-S

DVB-S2

DVB-T

DVB-T2

ISDB-TB

Off-Air Streams From All Major Digital TV Standards Around the World.

Ideal for Remote Testing of STB and Headends.

Available in lengths of 30 seconds and 5 minutes on USB memory sticks or by FTP download.
File format: .ts

Streams available:

ATSC	with HDTV (USA)
ATSC	with 1 Single Channel (USA)
ATSC	with 2 Audio PIDs for 1 Video (USA)
ATSC	with High Null Packets (USA)
ATSC	with Wrong TS ID (USA)
ATSC	Fully Packed (USA)
ATSC	Channel Name Missing (USA)
ATSC	Identical Channel Names (USA)
ATSC	Mechanical Channel Names (USA)
DTMB	with HDTV (China)
DTMB	with false video descriptor (China)
DTMB	with MHEG (Hongkong)
DVB-C	in NagraVision 3 (Portugal)
DVB-S	with 3D (ASTRA)
DVB-S	with MPEG2 and H.264 mix (PALAPA)
DVB-S	in MIS (ATLANTIC BIRD)
DVB-S2	with HDTV (HOTBIRD)
DVB-S2	with MPEG 4:2:2 (EUROBIRD)
DVB-S2	with 3D (TURKSAT)
DVB-S2	with HDTV (AMAZONAS)
DVB-S2	with 3D (THOR)
DVB-S2	with 1Seg mobile TV (AMC 6)
DVB-T	with radio (Netherlands)
DVB-T	with MHEG (UK)
DVB-T	as retransmission off satellite (Qatar)
DVB-T2	with HDTV (Germany, UK)
ISDB-T	with 1Seg mobile TV and HD (Brazil)

and many more according to standard

www.transponderstream.com

THE BIG CHINA MANUFACTURER ADDRESS LIST

Contact ALuoSat
luo.shigang@ALuoSat.de

ALuoSat 阿罗卫视
Export Digital TV Products from China

LUO SHIGANG
President

#15, Feringa Str, 2nd Floor, Room D14
85774 Munich-Ufg, GERMANY

Tel: +49-151-40405196
Fax: +49-89-92185023
Email: luo.shigang@ALuoSat.de
Website: www.ALuoSat.de



China Manufacturer Database*: 1500 Manufacturers
in mainland China complete with address in Chinese
and contact details of Production Manager

*regularly updated

ALuoSat 阿罗卫视
Export Digital TV Products from China

AWARD WINNING

21 IPTV/WebTV
RECEIVERS OF
ST CENTURY

这些是获得最高奖的产品





Manufacturer	AZBox
Website	www.azbox.com
Function	HDTV DVBS2 Miniature HDTV Linux Receiver with Multimedia Features
DVBS2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3 / USALS
S-Video/HDMI	— / •
Scart/Digital Audio	— / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/09/azbox-mini-me
Read TELE-satellite Test Report



Manufacturer	Amiko
Website	www.amikostb.com
Function	DVBS2 / DVBT & DVBC Triple Tuner PVR Receiver
DVBS2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / 1.3
S-Video/HDMI	— / •
Scart/Digital Audio	• / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/07/amiko
Read TELE-satellite Test Report



Manufacturer	AZBOX
Website	www.azbox.com
Function	HDTV DVB-S/DVB-S2 Linux Receiver with Multimedia Features and large Flash-memory for 3 Boot Images
DVB-S2/LAN	• / •
Channel Memory	unlimited
DiSEqC	1.0 / 1.1 / 1.2 / USALS
S-Video/HDMI	— / •
Scart/Digital Audio	— / •



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/03/azbox-me
Read TELE-satellite Test Report

Manufacturer	Logitech
Website	www.logitech.com
Function	IPTV Receiver



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/03/googletv
Read TELE-satellite Test Report



LOGITECH



Manufacturer	Amiko
Website	www.amikostb.com
Function	DVB-S / DVB-S2 & DVB-T Combo Receiver with PVR
IPTV	KartinaTV



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/12/05/amiko
Read TELE-satellite Test Report



AMIKO



Manufacturer	Amino
Website	www.aminocom.com
Function	IPTV Set-top-Box
Stream Protocol	UDP
Menu Standards	NetUP Middleware
WLAN	—



TELE-satellite Magazine Expert Opinion

www.TELE-satellite.com/11/03/amino
Read TELE-satellite Test Report



AMINO

Manufacturer	Jiuzhou
Website	www.jiuzhou.com.cn
Function	IPTV Set-Top-Box
Stream Protocol	UDP
Menu Standards	HTML4, Javascript 1.5, Java Virtual Machine
WLAN	• (via USB stick)

JIUZHOU DTP8300
IPTV Receiver Equipped with Top-Notch Technology

TELE-satellite Magazine
Expert Opinion

www.TELE-satellite.com/11/01/jiuzhou
Read TELE-satellite Test Report

Manufacturer	AZBox
Website	www.azbox.com
Function	HDTV DVB-S2 and IPTV receiver with various Multimedia&Internet Features
Stream Protocol	UDP
Menu Standards	html
WLAN	—

AZBOX ULTRA HD
Fully Equipped Satellite and Internet HDTV Receiver

TELE-satellite Magazine
Expert Opinion

www.TELE-satellite.com/10/09/azbox
Read TELE-satellite Test Report

CHINA



LOOKING FOR A SET TOP BOX MANUFACTURER?

Contact ALuoSat
luo.shigang@ALuoSat.de

We help you find the manufacturer in China
that matches your needs and requirements

Contact us with your specifications and we
do the rest

ALuoSat 阿罗卫视
Export Digital TV Products from China

ALuoSat 阿罗卫视
Export Digital TV Products from China

LUO SHIGANG
President

#15, Feringa Str, 2nd Floor, Room D14
85774 Munich-Ufg, GERMANY

Tel: +49-151-40405196
Fax: +49-89-92185023
Email: luo.shigang@ALuoSat.de
Website: www.ALuoSat.de





■ Satellite reception system
made from Legos and
aluminum foil.

Lego Antenna



-
- *Even five-year-old kids can build a satellite system (if Dad helps)*
 - *You can make your own parabolic dish out of aluminum foil*
 - *Installation on a balcony is only good on those days when the wind is calm*
 - *Lego Antenna lifespan? No more than an hour since by then your daughter will want to build something else with the Lego bricks*
 - *An interesting way to spend the afternoon with your kids*

A passionate satellite DXer plays with his daughter and uses Legos to build a satellite antenna!

Vitor Martins Augusto

Today, in an industry that consistently offers LNBs with lower and lower noise figures and where satellite receivers are getting more and more sensitive, you tend to forget how powerful DTH satellites have become. In Europe those satellites would be ASTRA and HOTBIRD. To demonstrate how simple it really is to receive a satellite signal and since I had already committed to spending some time with my daughter in the afternoon, I decided to make the best of things and use her Lego blocks to build a Lego satellite antenna with my daughter. The reflector was made out of aluminum foil that I "borrowed" from my wife in the kitchen. For the reflector three layers of aluminum foil were folded together resulting in a fairly stable square.

The still flat aluminum foil had to be molded into a parabolic form. Since a simple imprint from another antenna was out of the question – that would have been cheating – the following technique was used: you take the flat aluminum foil and lay it on a couch or mattress or on some other soft surface. Then you take a smooth ball and roll it on the aluminum foil in a spiral fashion from the center to the outside. Repeat this procedure several times without exerting too much pressure.

The result is a parabolic



■ The materials needed for the Lego antenna: building blocks from my daughter and a roll of aluminum foil from the kitchen.

form. For best results, test the aluminum foil several times. If it hasn't quite reached its parabolic shape, simply roll the ball in a spiral fashion across the foil again. By testing the shape several times, you avoid accidentally over shaping the foil in which case you'd have to start over from the beginning. To secure the foil, a mount is built using the Lego blocks. This serves two purposes: first of all the mount has to support

the aluminum foil (i.e. satellite dish) so that it can be set to the proper angle and doesn't fly away or become deformed with the slightest breeze. Second, it serves as a mount for the LNB. Of course, it has to be placed at the proper offset so that it sits in the focal point of the antenna.

It was surprising how close the LNB was placed to the aluminum foil. Since the foil was shaped by hand

using a ball, it has a larger curvature to it compared to a standard antenna. This changes the f/D relationship. Don't be fooled by this; it's better at first to have the LNB too close to the foil instead of too far away!

Through trial and error and with the help of a signal analyzer it shouldn't take long to find the first transponders. By repositioning the LNB, you'll find the best



► DVB-S2 MPEG-4 HD/SD Receiver:

- Fully DVB-S/DVB-S2 MPEG-4 HD compliant
- Support customized OSD language
- PVR, time shift
- CA optional with Topreal embedded, silicon security
- Fully support to 7 days EPG
- 2* USB 2.0 port: PVR function, MP3 & JPEG playback & software transfer
- Record one channel & watch another at the same time
- Support subtitle, teletext
- HDMI out with HDCP
- Other models available(DVB-C/S/T, MPEG-2/MPEG-4, HD/SD)

► Topreal CAS+SMS(Billing System):

- | | |
|--------------------------------|----------------------------------|
| • Subscriber Management System | • Advance/Silicon Safety |
| • Supporting simulcrypt | • Entitlement management |
| • IPPV(Impulse Pay per View) | • IPPT(Impulse Pay per Time) |
| • Fingerprint | • Mail/Announcement/Notification |
| • Paired function | • Regional Control |
| • Parent Control | • Card or Embedded CA available |



Beijing Topreal Technologies Co.,Ltd is a professional designer and manufacturer of digital TV head-end system. We have developed products with our own brand,which cover from DVB-S receiver,encoder(MPEG-4 HD/SD encoder,MPEG-2 SD encoder),multiplexer,scrambler,modulator to Set-top-box.

We also offer value-add products like subtitle insertion system,EPG,STB advertisement service system,browser,channel tracing table.All the products fully comply with DVB standard.


possible position so that the construction of the Lego mount can be completed. Manual formation of the aluminum foil was always necessary in order to obtain the best possible results.

During the alignment of the Lego antenna, you'll notice a huge disadvantage when analog satellite transmissions are turned off: while an analog receiver allowed you to align an antenna in real time, a digital receiver brings with it a relatively large delay. It's no wonder that more and more satellite signal analyzers are appearing on the market! The real-time spectrum display on an analyzer identifies signals before the tuner in the receiver has a chance to process the signals. Unfortunately, most low-end signal analyzers don't have a spectrum display or it's extremely slow and therefore not quite suitable for such an experiment. Of course it would be nice to have a professional analyzer at hand.

The further fine-tuning of the antennas alignment along with the manually shaped aluminum foil reflector provide sufficient gain in the antenna so that both analog and digital transponders can be received. There were no problems receiving ASTRA although it needs to be mentioned that this small antenna has no bad weather reserve and also that it shouldn't be mounted on a balcony or terrace if it's a windy day outside.


This experiment clearly shows how powerful modern DTH satellites really are and how LNBs and tuners have become such high-quality items. The time went by very fast that afternoon and my daughter got a small peak into the fascination of satellite reception!



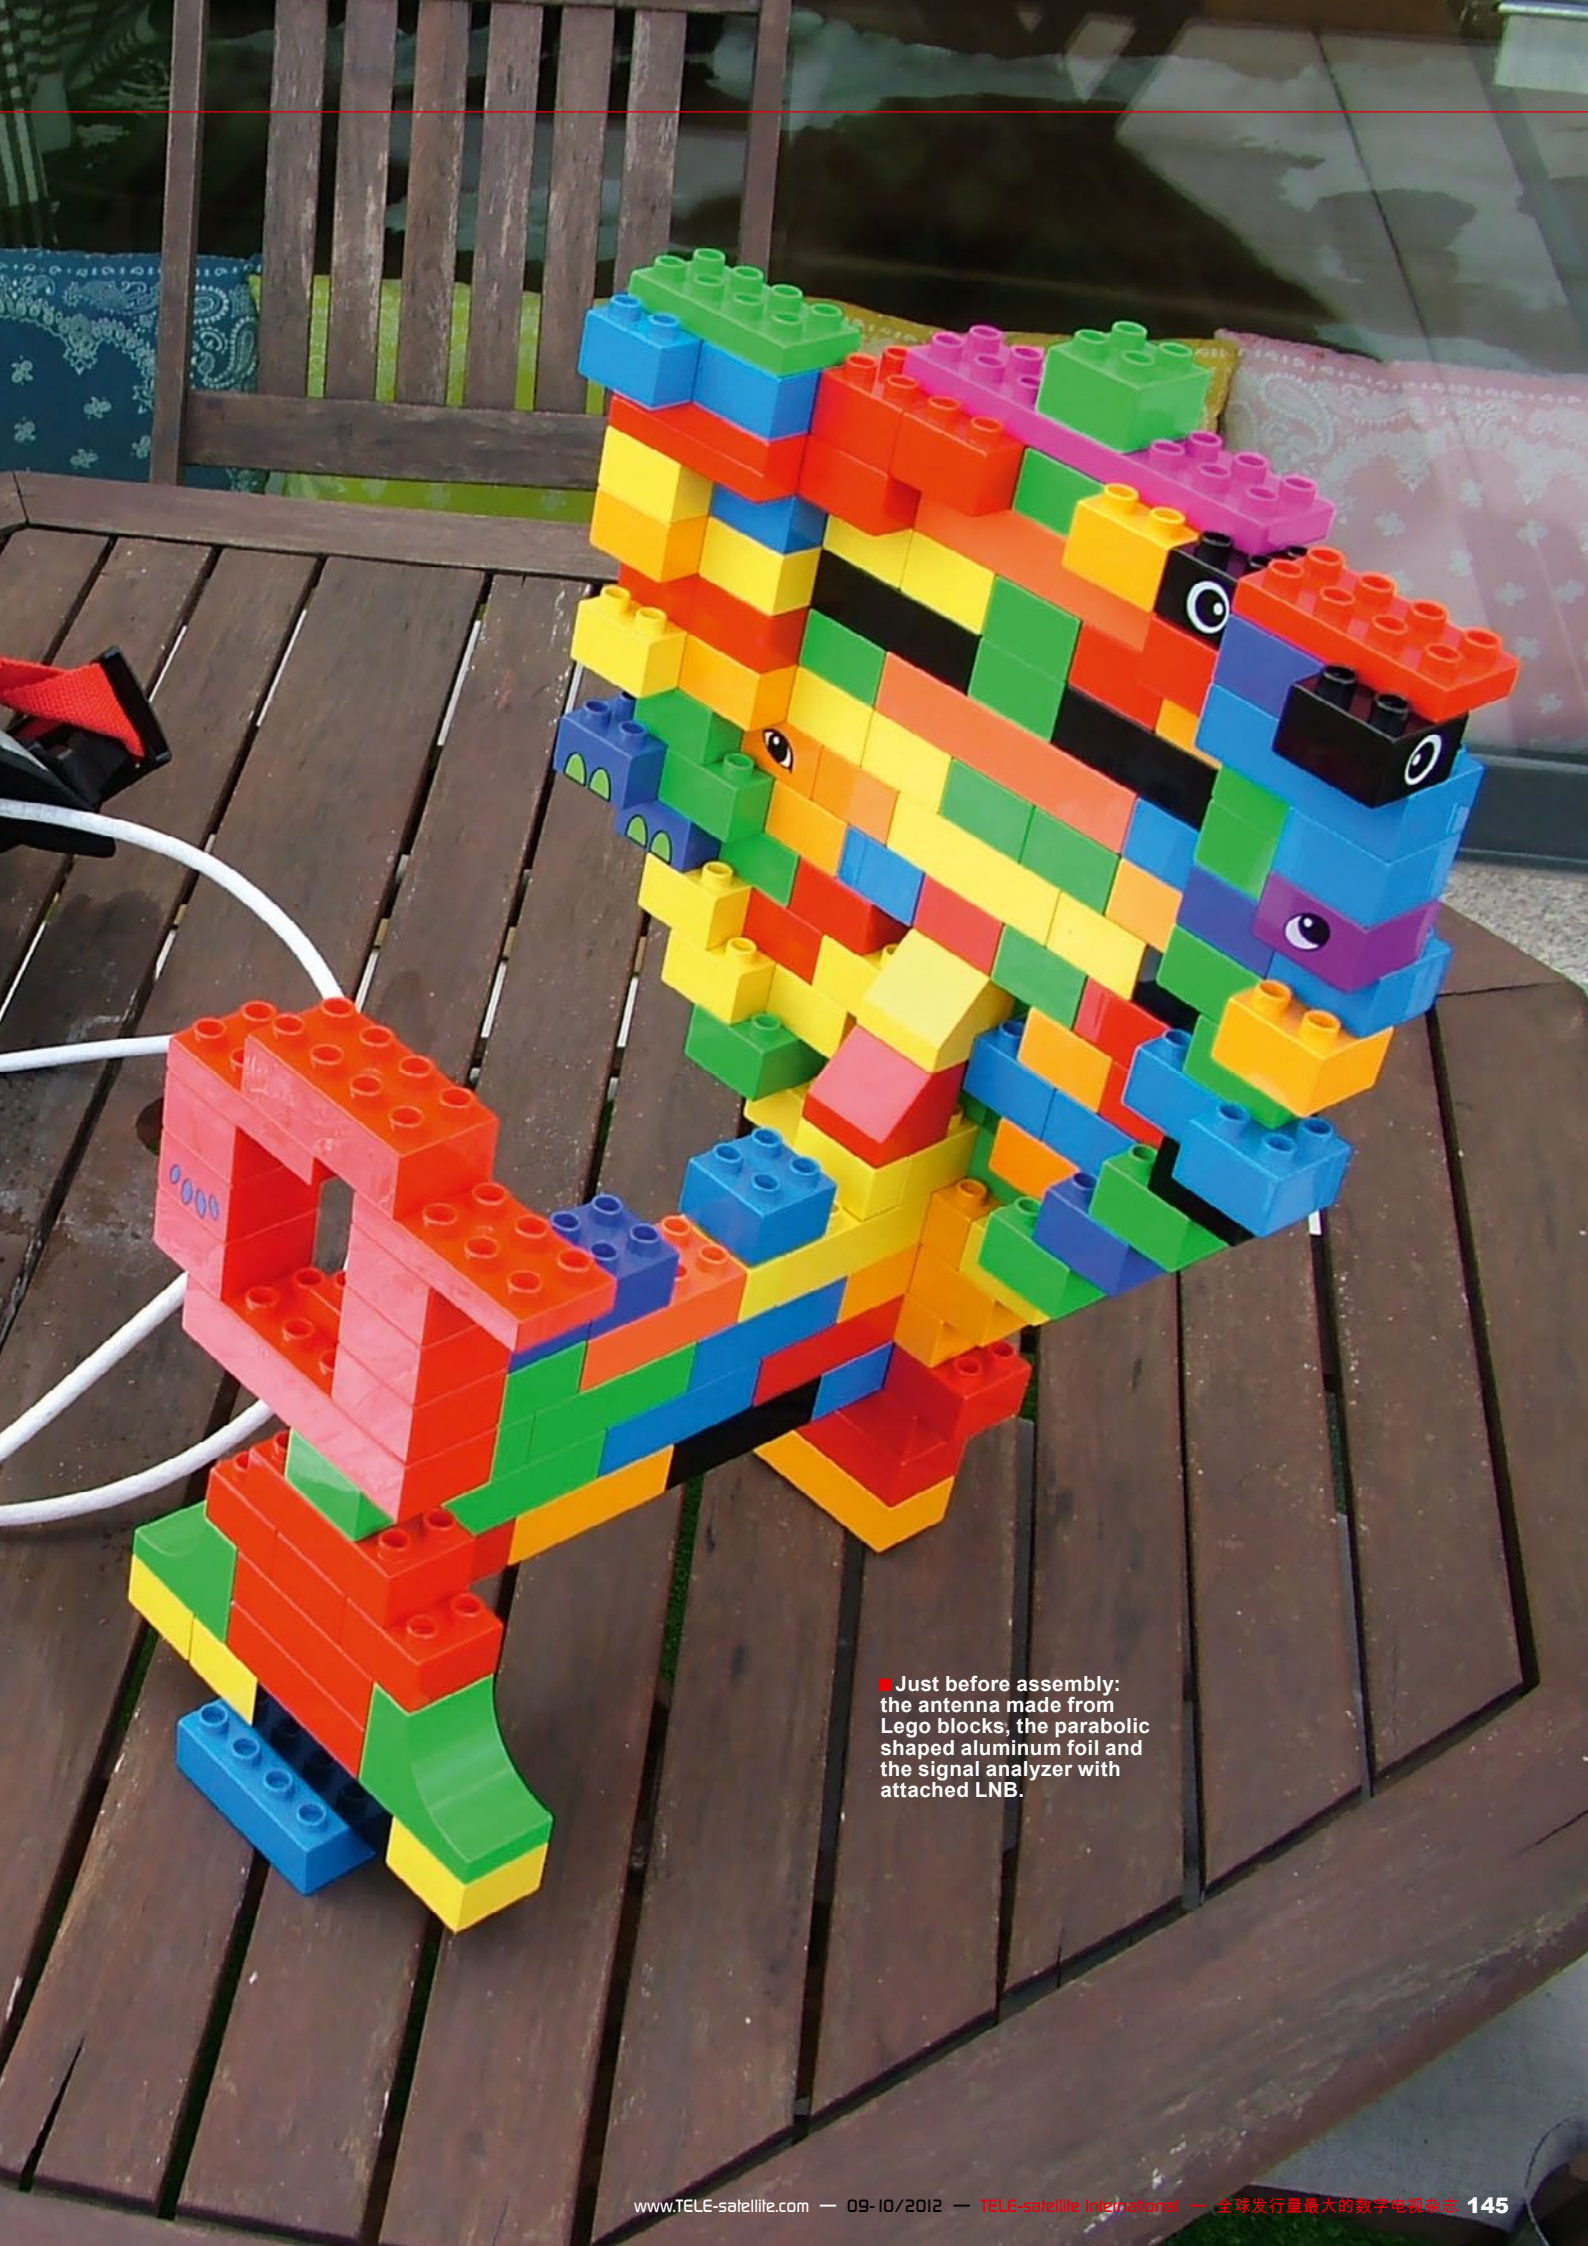

■ Just before assembly:
the antenna made from
Lego blocks, the parabolic
shaped aluminum foil and
the signal analyzer with
attached LNB.

Making a Parabolic Dish out of Aluminum Foil

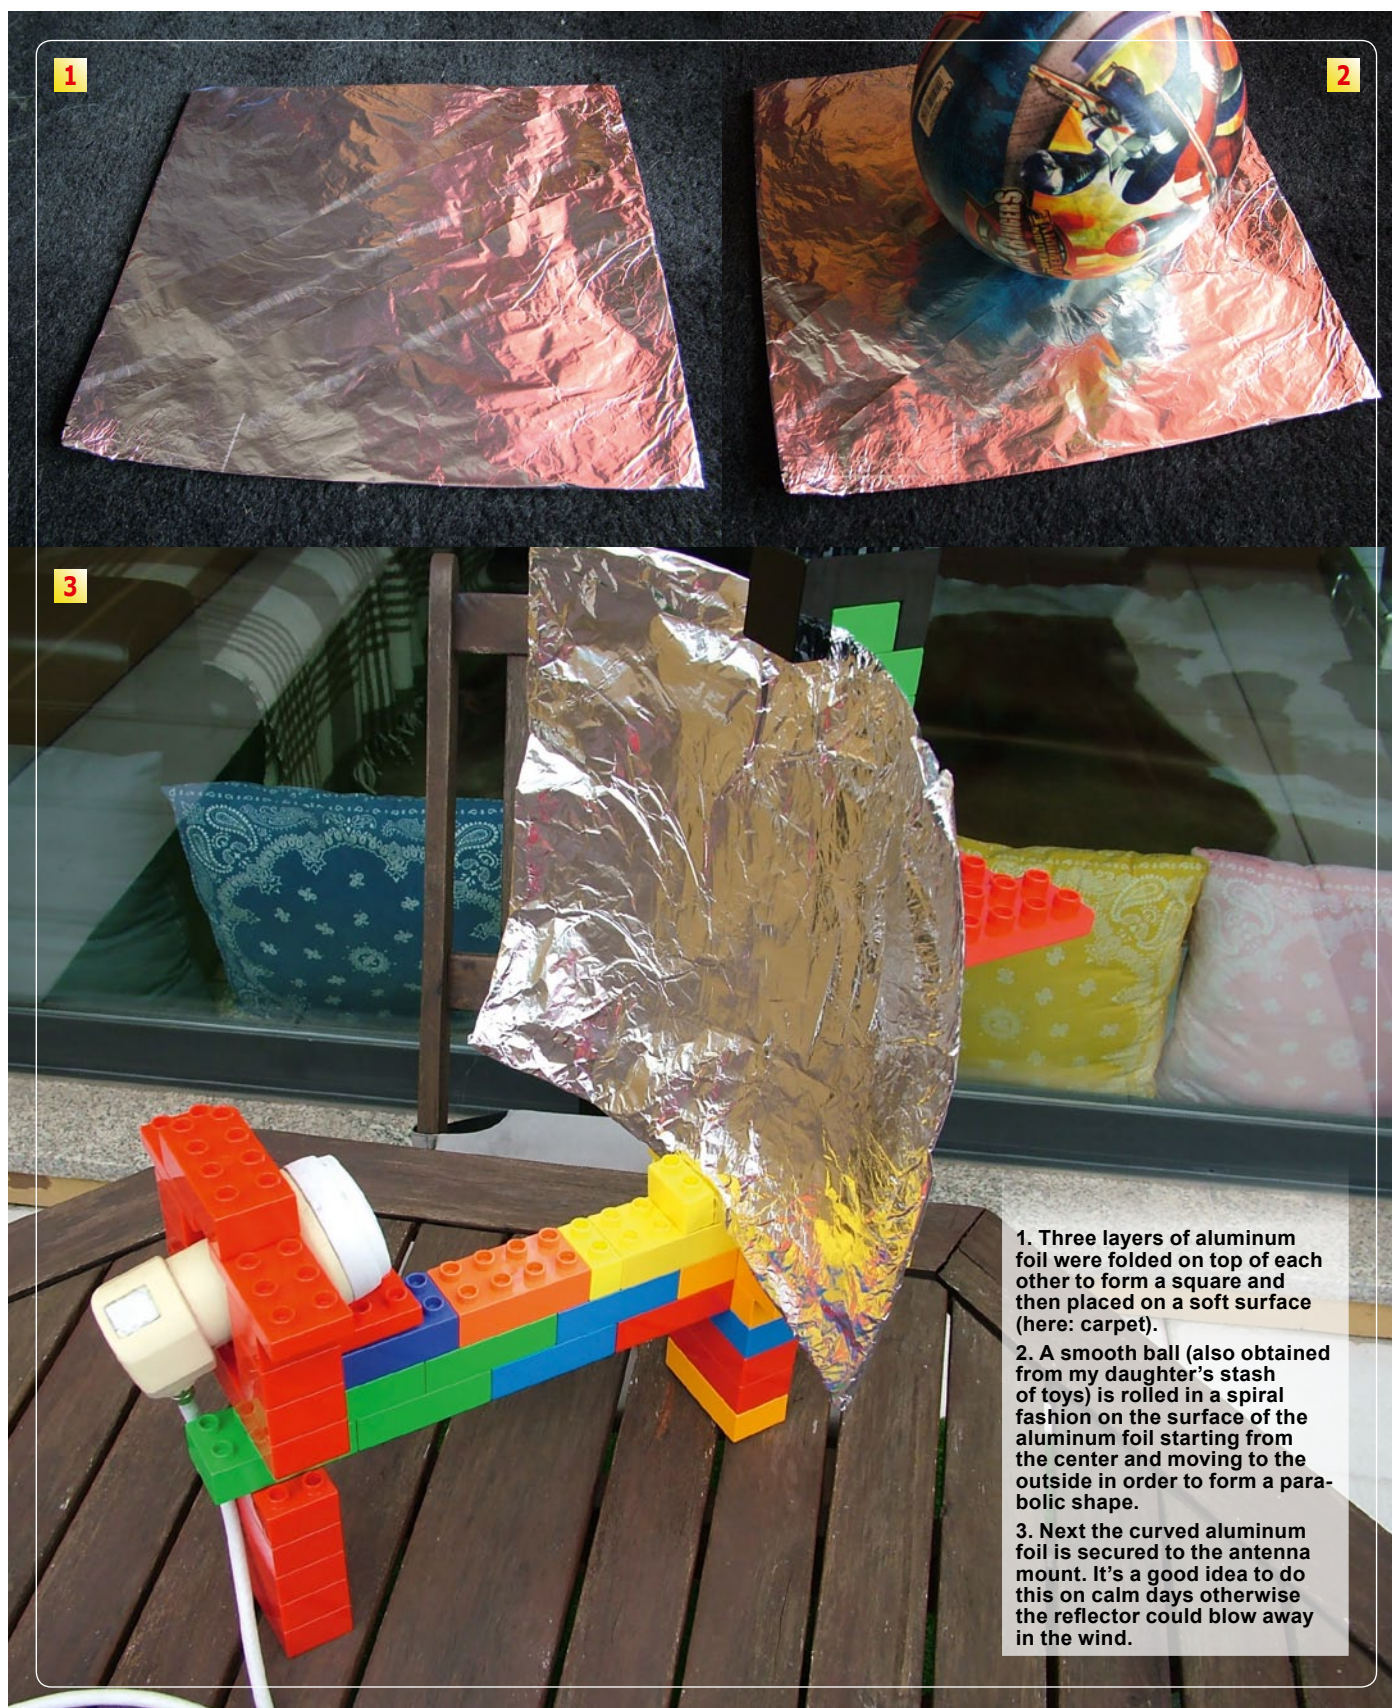

1. Three layers of aluminum foil were folded on top of each other to form a square and then placed on a soft surface (here: carpet).
2. A smooth ball (also obtained from my daughter's stash of toys) is rolled in a spiral fashion on the surface of the aluminum foil starting from the center and moving to the outside in order to form a parabolic shape.
3. Next the curved aluminum foil is secured to the antenna mount. It's a good idea to do this on calm days otherwise the reflector could blow away in the wind.

Inter BEE

International Broadcast Equipment Exhibition

2012.11.14 Wed. >>> 16 Fri. at Makuhari Messe, TOKYO



Inter BEE is recognized by industry professionals as Japan's largest broadcasting equipment exhibition.

What is Inter BEE?

- A venue where everyone can experience the latest trends and developments in audio, video, and communications, as well as related leading-edge technologies.
- An excellent opportunity to witness firsthand the burgeoning businesses related to the complete transition to digital broadcasting that took place in Japan ahead of other Asian countries.
- A venue where technical engineers, sales staff, and industry experts will be waiting at exhibitor booths to welcome participants.
- An excellent opportunity to gain knowledge and acquire the latest information at symposiums featuring invited guest speakers who are actively involved in the industry.

Exhibition Categories



Professional Audio Equipment Zone:

- High-end products such as consoles, mixers, audio equipment for facilities, etc. that are designed to satisfy professional needs.
- Efficient workflow systems from recording to mastering.

Professional Lighting Equipment Zone:

- Energy saving and super-luminosity LED spotlights.
- Stage-lighting equipment such as lasers and mobile lights that work together with a variety of audio and video configurations.

Video and Broadcast Equipment Zone:

- File-based workflow systems that facilitate comprehensive media management.
- HD-, 4K-, and 2K-related products as well as the latest in non-linear systems.
- Power-source equipment, batteries, measuring equipment, and converters that increase broadcasting equipment performance.
- Cranes, steadycams and other special/peripheral products that enhance the operation of broadcasting equipment.

Cross-media Zone:

- Digital signage and digital cinema products/technologies.
- 3D technology and content for filming, editing, relaying, and screening.
- IPTVs, mobile TVs, H.264 encoders, decoding-related technologies, FPU products, etc.

Visitor Registration

- Online Member Registration ⇒ <http://www.inter-bee.com>
- ※ Sign up first as an online member to enable visitor pre-registration that starts at the end of September 2012.

Find the Latest Information at:

Inter BEE online
www.inter-bee.com



Inter BEE 2011 Results

- Number of exhibitors: **800**
- Number of overseas exhibitors: **466**
- Number of visitors: **30,752**



Organizer: **JEITA** Japan Electronics and Information Technology Industries Association

Global partners:



Management/Contact : Japan Electronics Show Association

12F Ote Center Bldg., 1-1-3 Otemachi, Chiyoda-ku, Tokyo 100-0004 TEL:+81-3-6212-5231 FAX:+81-3-6212-5225 E-mail: contact2012@inter-bee.com




*Be the first to see
what tomorrow
will be
talking about.*

TUESDAY, JANUARY 8—FRIDAY, JANUARY 11, 2013 * LAS VEGAS, NEVADA * REGISTER AT CESWEB.ORG




REGISTER NOW

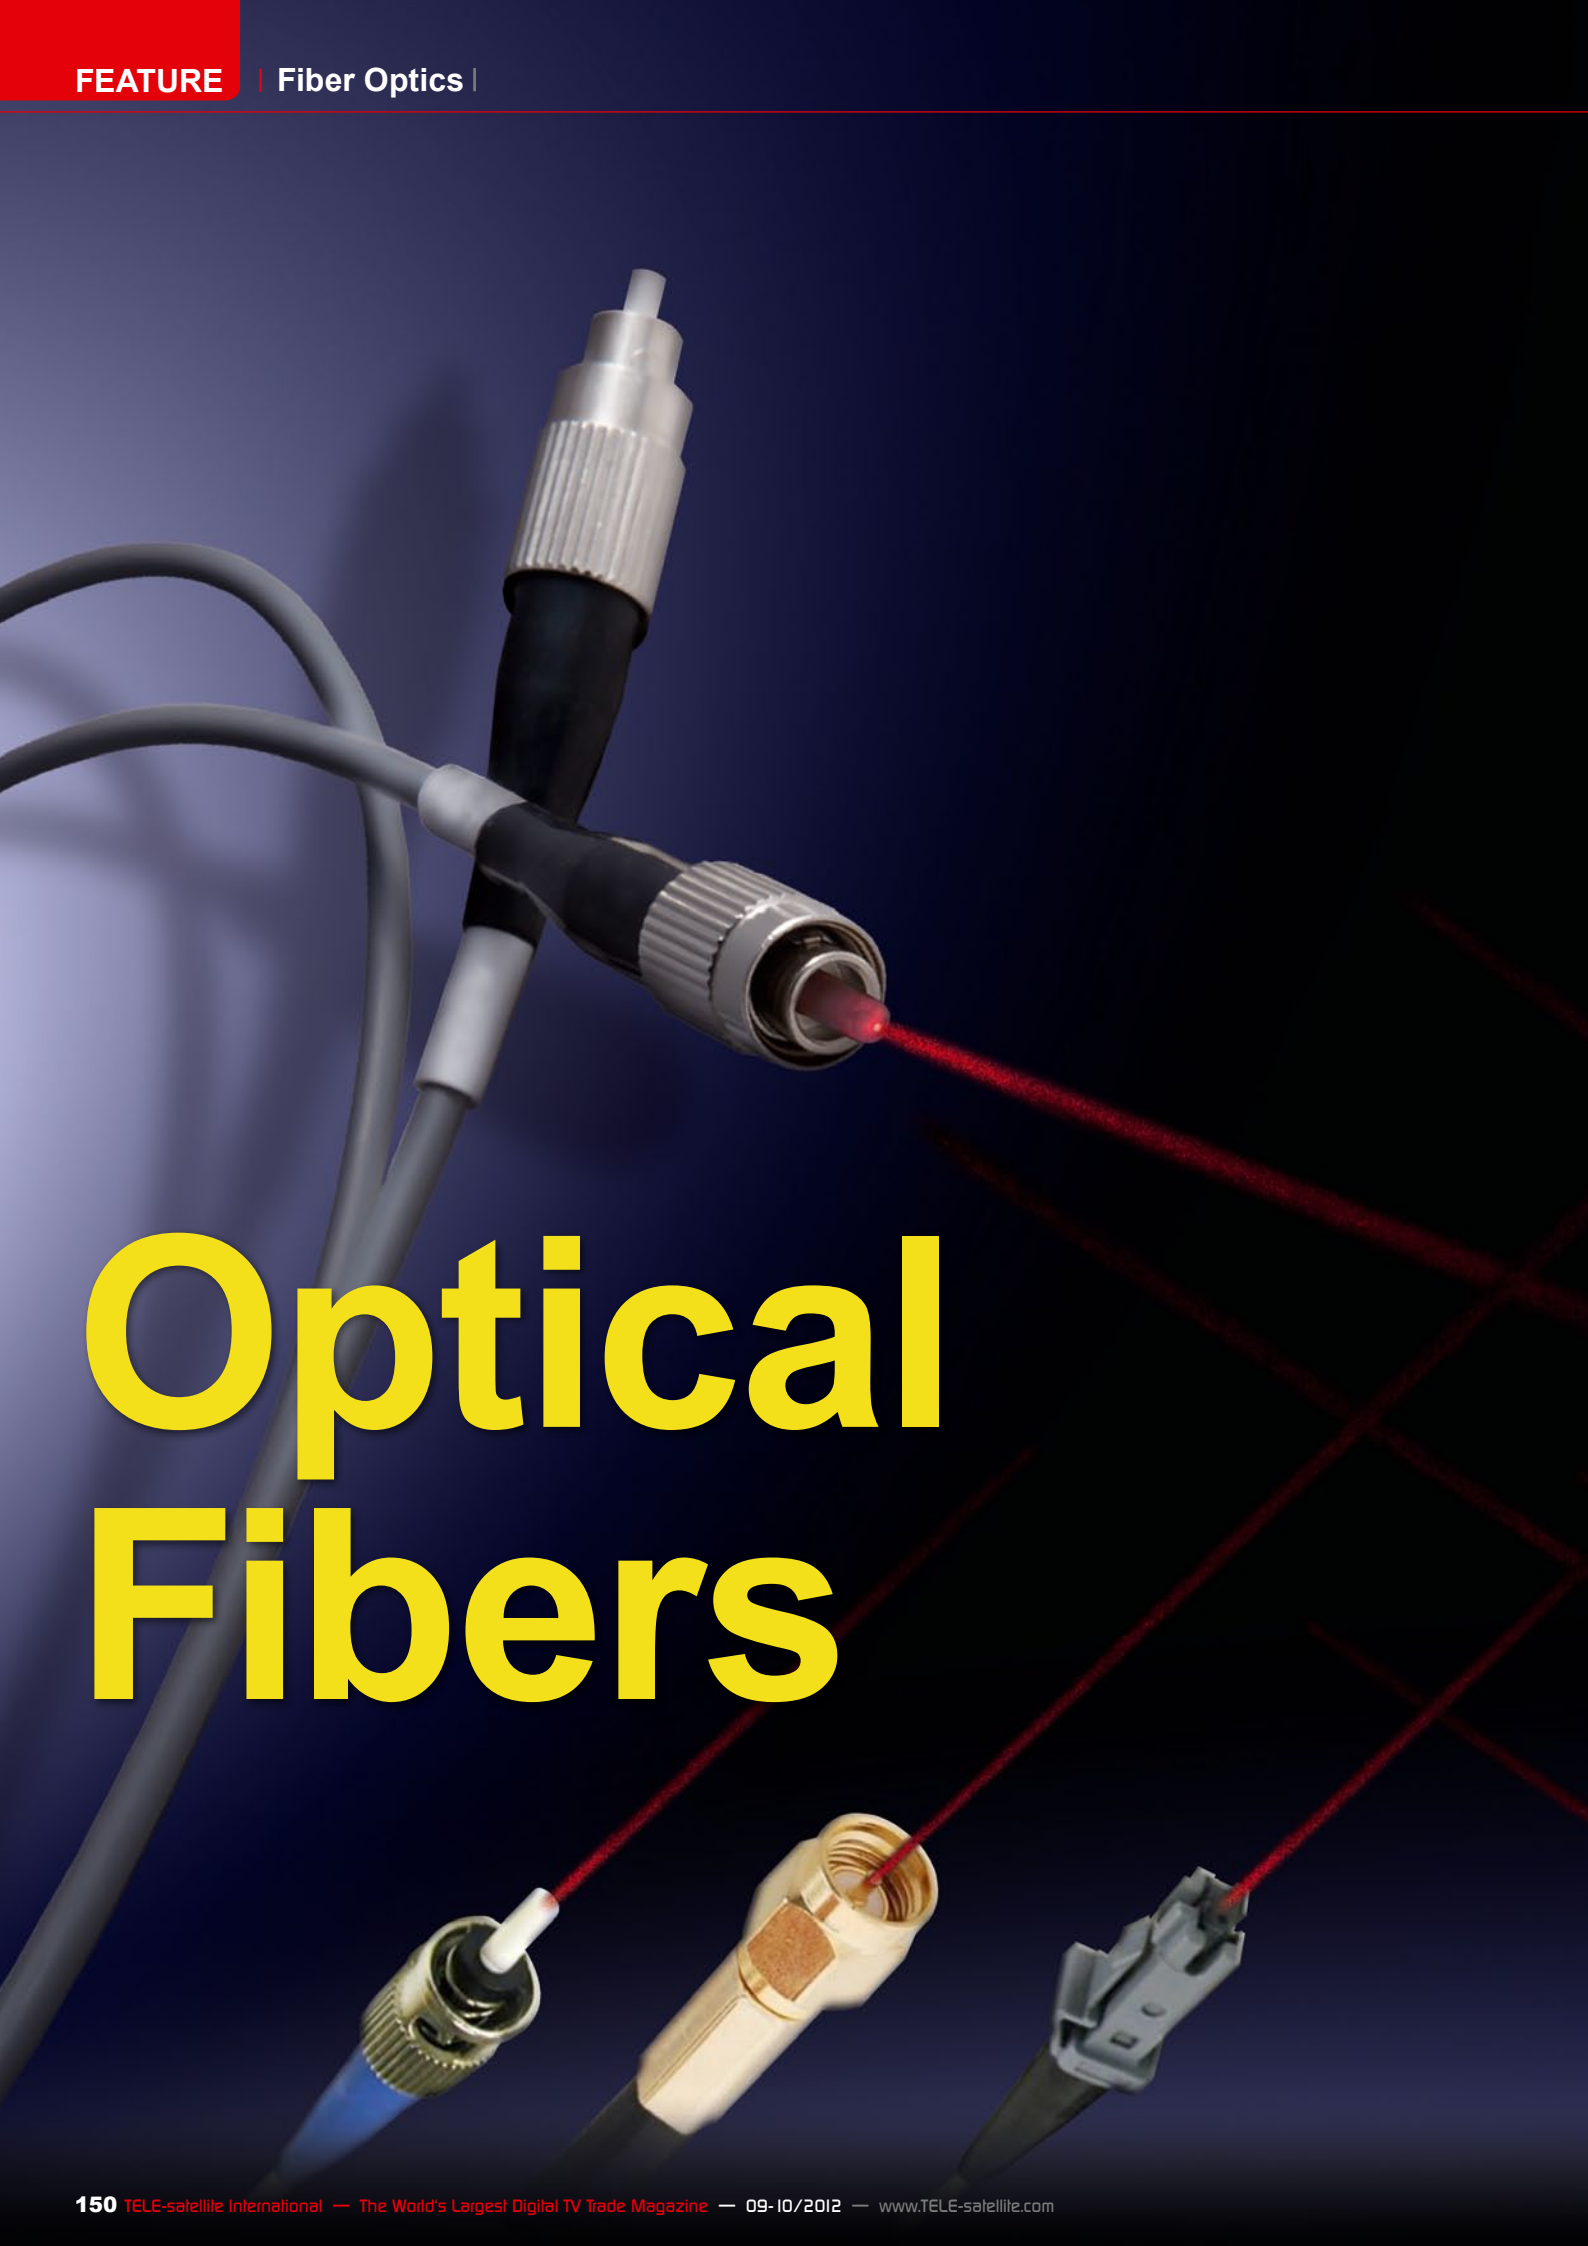

Optical Fibers

Wavelengths & Connector Types

-
- *6 different wavelength bands*
 - *what dispersion is doing to a signal*
 - *the advantages of Laser diodes*
 - *finding the lowest attenuation*

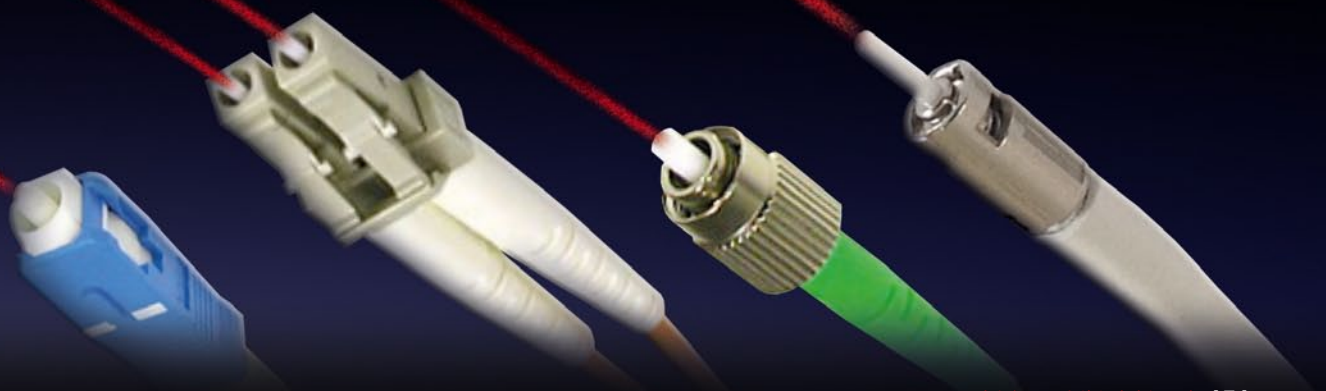

Connecting the Light

Jacek Pawlowski

Optical fibers introduced enormous improvement in data transmission. Anybody who is even moderately interested in technology knows that the most important reason for that was the very low signal attenuation of fiber optic cables. The first cables manufactured in 1970 had an attenuation of 20 dB/km. Today, we can achieve even 0.16 dB per kilometer. It is almost nothing when compared to the classical electrical cables.

However, there is yet another factor influencing the maximum useful length of a fiber optic cable. This is chromatic dispersion. To explain it in simple terms – various light rays in a fiber have a different propagation time what distorts the shape of the impulses carrying digital data. Dispersion puts a limit on the maximum useful bit rate that can be transmitted in a given cable. Dispersion is less painful in single mode fiber optic cable (i.e. those with a diameter less than 12 µm) but even such cables are not quite free from this phenomenon due to material structure non-homogeneity.

Attenuation and dispersion depend on the light wavelength and optical fiber material. The first generation of optical fiber worked with wavelengths of around 850 nm, the second generation with 1300 nm and the third one with 1550 nm. Theoretically, the lowest attenuation is achievable for 1550 nm while the lowest dispersion (= the highest bit rate) for 1300 nm.

The wavelength used in optical fiber based systems have been standardized. There are six transmission windows named: O, E, S, C, L and U-band. The corresponding wavelength ranges are listed in the table 1.


For your comparison, the visible range for humans is: 380-780 nm. So, the light used in fiber optics, no matter what band, lies in the deep infrared and you cannot see it.

The optical transmitter generates (usually) modulated light in one of the bands specified above. The transmitter designs are based either on LEDs (Light Emitting Diodes) or laser diodes. LEDs

made from gallium arsenide phosphide (GaAsP) generate light at about 1300 nm while older types made from GaAs worked at 810-870 nm. That's why we still sometimes meet installations using these wavelengths. LEDs produce incoherent light – the signal peak is about

Band	Wavelength Range
O band	1260 to 1360 nm
E band	1360 to 1460 nm
S band	1460 to 1530 nm
C band	1530 to 1565 nm
L band	1565 to 1625 nm
U band	1625 to 1675 nm

■ Table 1.

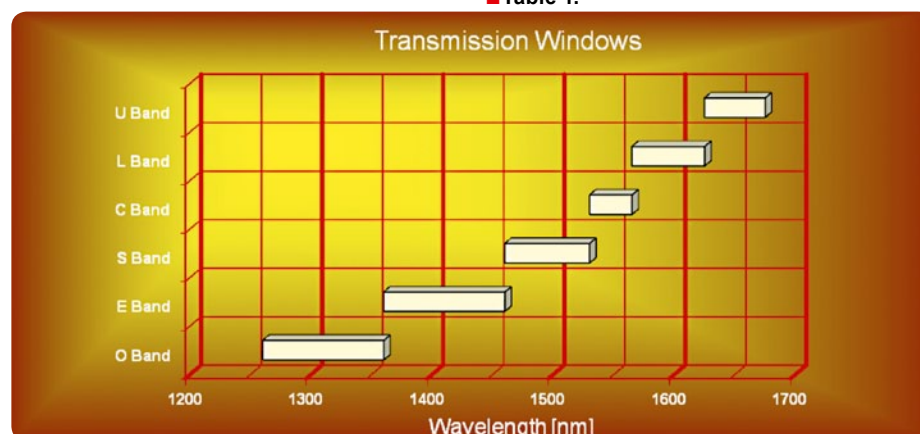


30-60 nm wide. Laser diodes that produce coherent light are not only much sharper in spectral view but also more efficient (50% vs. 1%) and ensuring higher bit rates. Modern laser diodes are not that much expensive anymore and they started superseding LEDs in many applications.

To receive a signal at the other end of a fiber optic cable, one needs an optical receiver. Its main component is a photo detector converting light into electri-

cal current. It is usually a photodiode. Depending on the elements and compounds used to create a p-n junction, we achieve maximum sensitivity for a different wavelength. For example, to build a receiver for 1300 nm, one needs either germanium (Ge), indium phosphide (InP), or indium gallium arsenide (InGaAs) photodiode.

Detailed information on standardized optical connectors can be found in IEC 61754 norm.

A number of connectors for fiber optic cables have been developed and standardized over the years. Here are the most popular connectors:

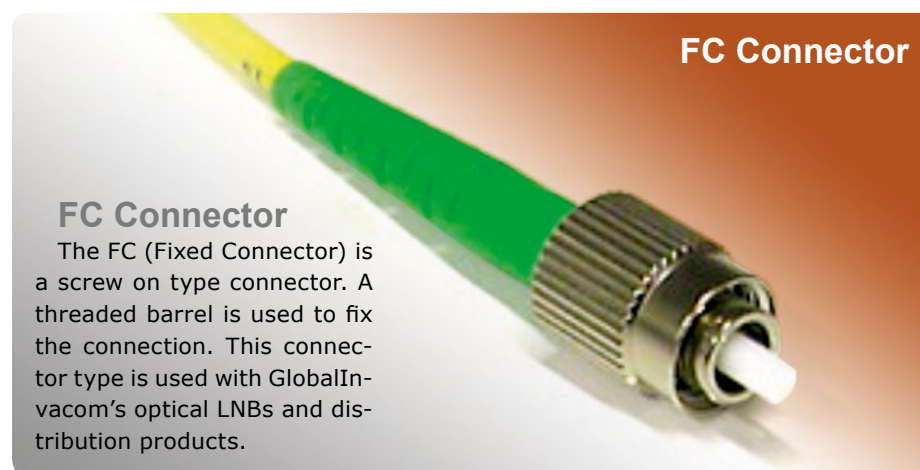


The 21st




**Compulsory Digitisation Declared by The Government
Opens Up A Huge Market For Digital CATV Product Sales
*Be There To Maximise Your Market Share***

**Halls A, B & C Sold Out Few Good Stalls Available in Hall D
We Have Opened Hall F In The Adjacent Tower Block**

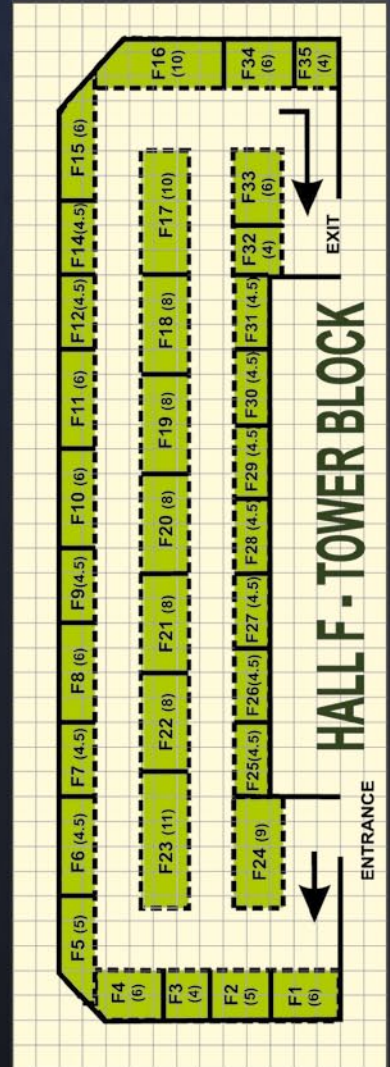


HALL LAYOUT 2012

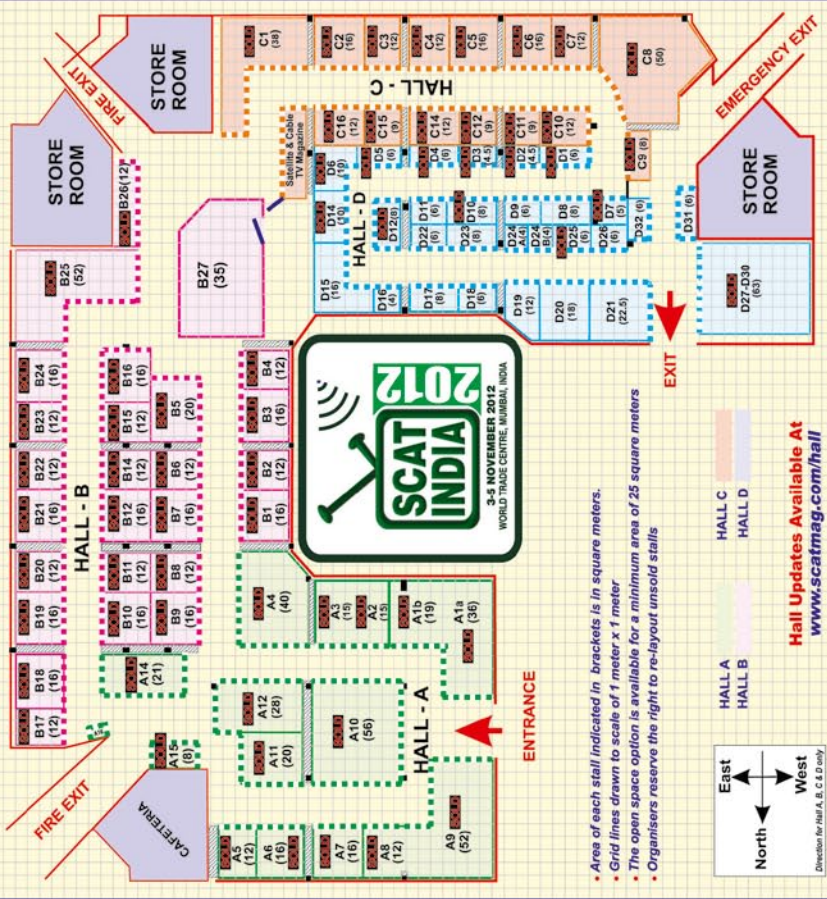

- Area of each stall indicated in brackets is in square meters.
- Grid lines drawn to scale of 1 meter x 1 meter
- The open space option is available for a minimum area of 25 square meters
- Organisers reserve the right to re-layout unsold stalls

Hall Updates Available At
www.scatmag.com/hall

CRUSH HALL

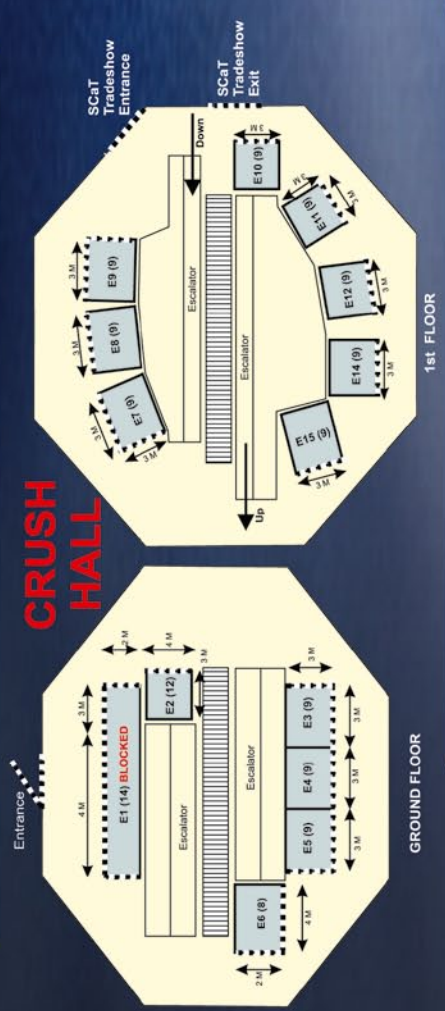

Contact

SCaT MEDIA & CONSULTANCY PVT. LTD.

27, Madhu Industrial Estate, 1st Floor, P.B. Marg, Worli, Mumbai - 400013, India
Tel.: +91-22-2494 8280 / 6660 4029 Mob.: +91-932300 6927 Fax : +91-22-2496 3465
Email: scatmag@scatmag.com Website : <http://www.scatmag.com/scatindia>

Organised By :




www.scatmag.com



SC Connector




ST Connector

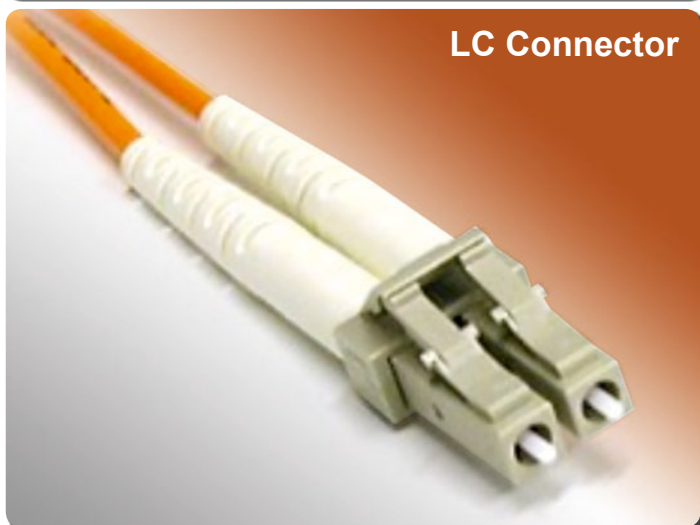

LC Connector



MT-RJ Connector

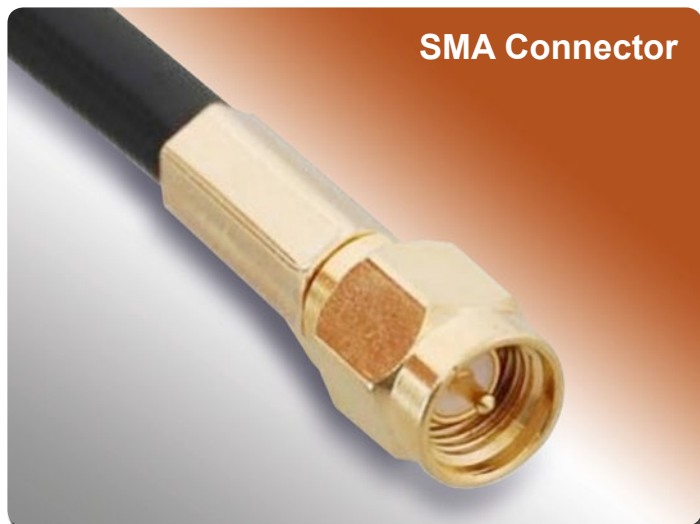

SMA Connector



CLICK!

SC Connector

SC (Subscriber Connector) is a snap-in connector. It is frequently used for newer network installations.

ST Connector

ST (Straight Tip) is a slotted bayonet style connector very popular in late 80s and early 90s.

LC Connector

LC (Lucent Connector) is a smaller version of SC connector (the ferrule is half the size).

MT-RJ Connector

MT-RJ (Mechanical Transfer Registered Jack) is a small size connector commonly used for networking applications.

SMA Connector

SMA (SubMiniature version A) was the first standardized connector for optical fibers. It uses a threaded connection to keep the plug intact in the socket.

CLICK!

This is a proprietary design – a push-pull low profile connector dedicated for the miniature H+S fiber optic distribution system.

China Satellite

China Satellite 2012

Hotel Nikko New Century Beijing, China
CONFERENCE: September 20-21, 2012
EXHIBITION: September 19-21, 2012

-----Your Portal to China Satellite Intelligence and Market

Supporting Organizations:

National Development and Reform Commission (NDRC)
Ministry of Science and Technology
China National Space Administration
The State Administration of Radio, Film and Television System
Ministry of Industry and Information Technology
China Aerospace Science and Technology Corporation
China Aerospace Science and Industry Corporation

China Academy of Space Technology
China Satellite Communications Corporation
China Education Television
China Transport Telecommunications & Information Center
National Remote Sensing Center of China
Information Center, China Securities Regulatory Commission
China Center for Resource Satellite Data and Applications

China Satellite 2012
中国卫星应用大会

Huang Xu Secretary-General Email: huangxu@china-satellite.org
Gloria Wong Email: gloria@china-satellite.org
Tel: +86-10-58494900 Fax: +86-10-62218122

We proudly announce CHINA SATELLITE CONFERENCE was supported by the followings...



<http://www.china-satellite.org>


Making life hard for DXers – or: TV stations' little tricks to avoid viewers

Thomas Haring

Transmissions that are broadcast via satellite usually can be received by anyone within a particular satellite's footprint. In the case of DTH (direct to home) TV and radio reception this is a welcome scenario, because providers are trying to max out on potential audiences. On the other hand, programs also need to be distributed within and between different providers without any viewers being able to receive them. In satellite speak these transmissions are called feeds. Feeds can be used to transmit a baseball game from the US, for example, or a live report from a news event.



■ A motorised antenna is required for feed reception

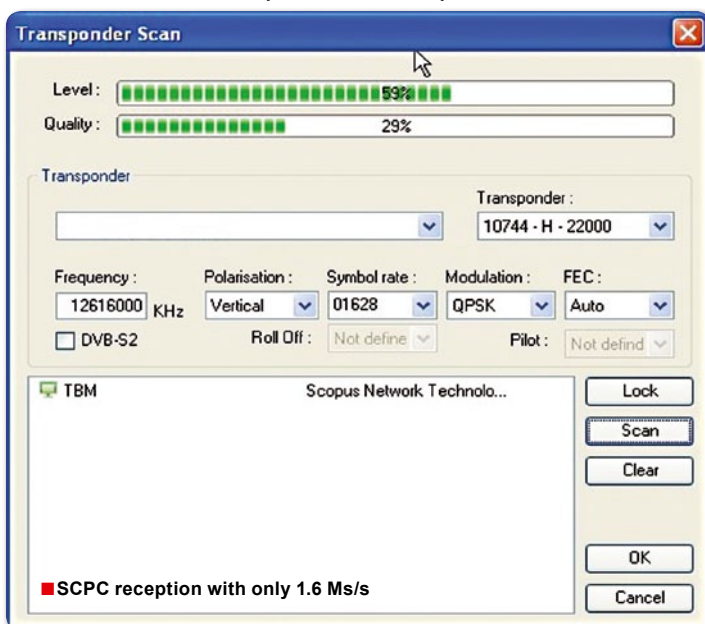

■ In Europe the most popular multi-feed reception system is aligned towards ASTRA 19.2° East and HOTBIRD 13° East. Feeds cannot be received with such a set-up.



EUROVISION NEWS			
08 SEPTEMBER 2009		08:38 GMT PEN	
08:00	NLFCCE	Film and Stars Feed	WFE
08:50	DEARD	Bundestag Afg debate	NE
09:25	PLTVP	Birkenau Memorial	NEC
13:25	USNYSE	NYSE Opening Bell	NE
14:00	NLFCCE	Film and Stars Feed	WFE
16:30	PLTVP	Peace Congress end	NE

Page 1/1 - 6 items from 02:38 to 20:38 GMT (360' in the past - 720' in the future)

■ List of today's feed transmissions

In both cases, TV stations do not want any unwelcome viewers for their feeds, because they only want the final product to reach households, including commercial breaks. This is why transmissions between studios or TV stations frequently use fibre optic cables to make sure only the two transmission partners can access material.

Luckily for satellite DXers, in today's world a cable cannot always be used, for example if the distance is too large or if no cable is available on site to send a live report to station headquarters. In these cases, satellites have to be used for feeds.

Of course all sorts of technical tricks are used to limit the number of onlookers and the following account lists major strategies TV stations rely on:

Encryption


This is the most effective protection against unwanted viewers and for studio-to-studio transmissions this in most cases does not pose a challenge from a technical point of view. With outside broadcast (OB) vans it's a different story altogether.

While most OB vans are equipped with encryption hardware, time is of the essence in live reports so that setting up the required encryption is frequently not possible as it takes some time until all parameters are set and checked. Generally, feed transmissions fall back on directly addressable encryption systems such as PowerVu or BISS. The latter, in particular, is protected by a password that is defined by the TV station.


Even if you try as hard as you can with the help of BruteForce luck will probably not be on your side in finding the correct password during the short time most feeds last. After all, the BISS password consists of 16 hexadecimal digits.



■ Counting down to the beginning of a feed transmission

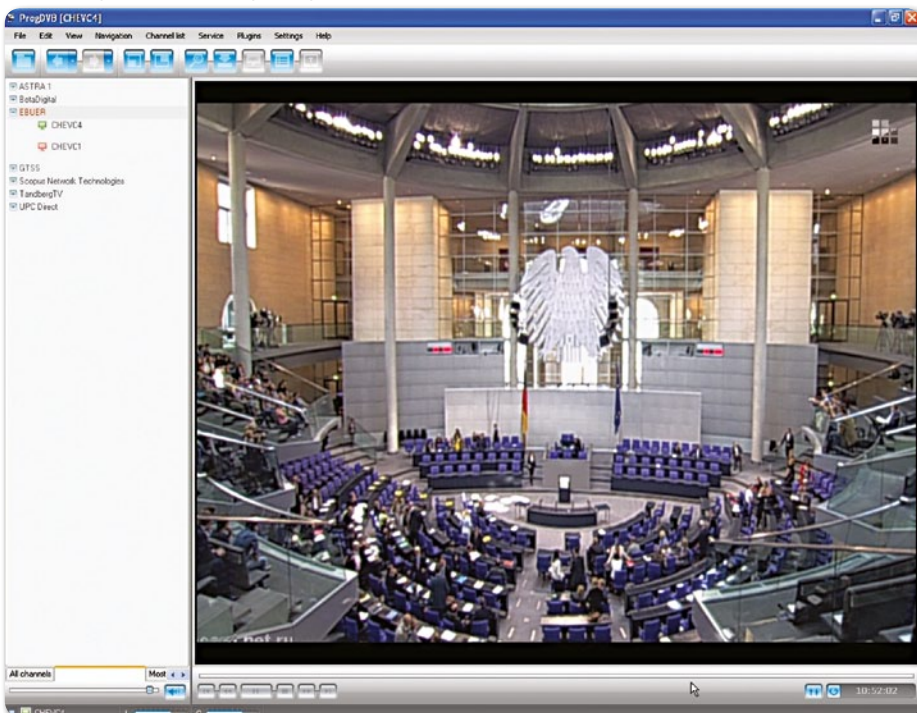

■ MPEG 4:2:2 feed from the German parliament. A standard receiver would not be able to process this signal. With a PC and appropriate software the signal turns into nice video on the PC monitor.

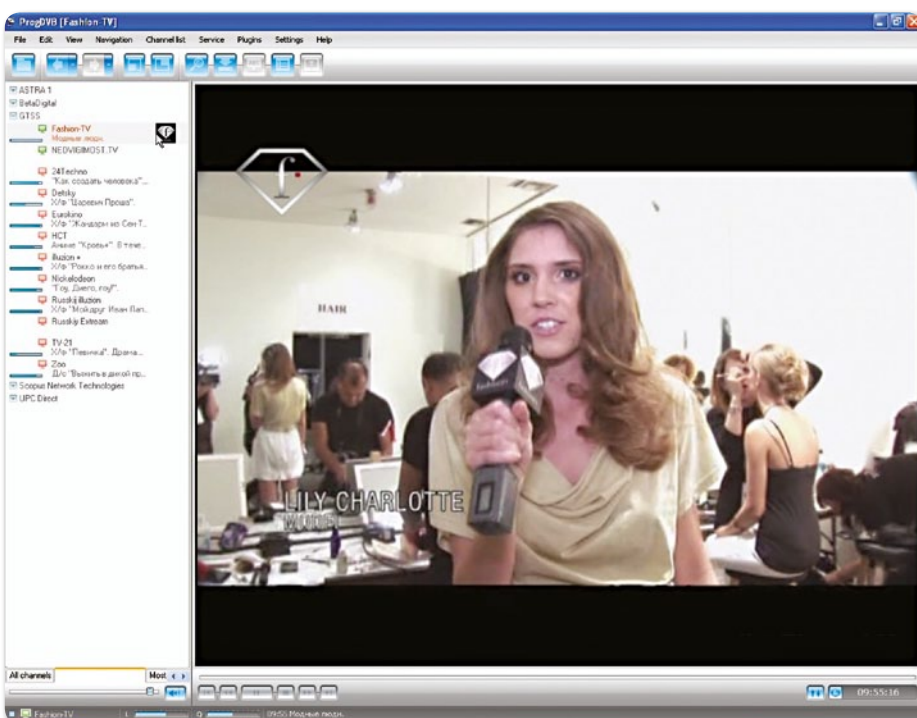

■ Fashion TV on ABS1 75° East with an FEC of 7/8.

From creation to consumption, across multiple platforms and countless nationalities, NAB Show® is home to the solutions that transcend traditional broadcasting and embrace content delivery to new screens in new ways.

SAVE THE DATE

2013

CONFERENCES April 6–11 EXHIBITS April 8–11
Las Vegas Convention Center, Las Vegas, Nevada USA



www.nabshow.com

Well-known feed hunters from all over the world:

■ Applesat from Beijing, China



■ Feed hunter Rini from Amsterdam, Netherlands



■ Roy Carman from London, England



If a feed is used to transmit content that is protected by copyright laws (for example a rock concert with clearly specified exploitation rights) TV stations will go out of their way to make sure the feed is fully encrypted. If the content is in the public domain anyway the measures used by TV stations generally are less stringent but at the same time lock out as many potential viewers as possible.

Selection of satellite

Using a popular DTH satellite for feeds always results in a comparably high number of unintended viewers. In addition, the cost for using hugely popular positions such as ASTRA 19.2° East or HOTBIRD 13° East is enormous, so why would a provider select these birds for feeds in the first place? Dozens of less known satellites are available for that very same purpose and apart from being considerably less expensive they cannot be received by 99% of satellite antenna owners.

In Europe, the most frequently used satellites for feeds are EUTELSAT W2 at 16° East, EUTELSAT W3A at 7° East, EUTELSAT W1 at 10° East or TELSTAR 12 at 15° West for feeds to and from North America, ATLANTIC BIRD 1 at 12.5° West and PAS3R at 43° West as the westernmost option. Unless you own a motorised dish or top-notch multi-feed antenna you'll be left without a chance to receive signals from these positions.

MPEG 4:2:2

For many years, TV stations have tried to lock out viewers from feeds using modified colour sub-sampling. Digital TV reception via satellite generally uses the 4:2:0 standard which is characterised by identical colour sampling in both spatial directions, similar to the system used for compressed JPEG images.

MPEG 4:2:2, on the other hand, features a slightly different colour sampling process which distinguishes between horizontal and vertical colour sampling. Colour sub-sampling has its origin in the analog NTSC colour system and is used for digital video signals based on the ITU-R BT 601 norm.

With MPEG 4:2:2 horizontal colour sampling has only half the size of vertical colour sampling, yet this differ-

ence does not result in different colour resolutions for the two spatial directions because of interlacing that is inherent in the analog PAL and NTSC standards. Special receivers are required to correctly process and display such signals and because these receivers are designed for professionals only they carry a rather hefty price tag and thus are unaffordable for most amateurs.

However, most new Linux-based receivers allow real-time streaming of satellite signals to the PC using the built-in network interface. On the PC software decoders (which are available from the Internet at little or no cost) can take over decoding MPEG 4:2:2 signals and display feeds for DX enthusiasts.

Low symbol rate

This is a clever trick used to make sure transmissions cannot be received by just about anyone. Almost all DVB-S receivers available today are able to process symbol rates between 2 and 45 Ms/s, with the symbol rate denoting the number of changes of state per second of the carrier signal. This is not to be confused with the bit rate which specifies the number of bits transmitted per second and thus is an indication of the video quality of a specific channel. However, the two values are in fact interdependent as a low symbol rate automatically means that less information can be transmitted and as a consequence the bit rate used must also be lower.

This means that using a low symbol rate for feeds is a delicate balancing act for TV stations. On the one hand they want to lock out as many unwanted viewers as possible by using a low symbol rate, but on the other hand too low a symbol rate automatically reduces video quality, which of course is an absolute no-go in the professional world.

In the end, mainly symbol rates between 5000 and 6000 Ks/s are used, which does in fact leave out a substantial proportion of DTH viewers, but still allows transmitting a high-quality signal.

Naturally, there are some examples for extremely low values, such as signal feeds of some Italian channels on NSS7 at 22° West which use symbol rates of way below 2000 Ks/s and therefore cannot be received on most digital boxes.



CABSAT

www.cabsat.com

The Middle East &
Africa's Largest

BROADCAST, DIGITAL MEDIA & SATELLITE EXPO

12-14 MARCH 2013

Dubai International Convention & Exhibition Centre



■ Juan Carlos Duarte from Santiago, Chile



■ Ingo Salomon from Johannesburg, South Africa



■ Vincent Witjhun from Pontianak, Indonesia



Now you might wonder what it is that so many receivers encounter troubles with low symbol rates, while a few brave boxes seem to be unaffected at all. The root problem lies in the quality of the tuner as well as in software fine-tuning. If a transponder with extremely low symbol rates comes in, the bandwidth has to be reduced exactly in line with the symbol rate in order to arrive at a low noise level and achieve an optimum carrier-to-noise (C/N) ratio.

In turn, the frequency has to be maintained even more precisely for a stable and reliable signal. Many manufacturers are trying to cut costs both in the hardware and the software fine-tuning fields, which consequently creates problems with ultra low symbol rates. Yet, manufacturers are hardly to blame as their specifications in most cases explicitly state that only symbol rates of 2 MS/s and above are supported.

Low FEC

If a high-capacity transponder is required for a feed and the symbol rate cannot be reduced TV stations have the additional option of reducing the Forward Error Correction (FEC). FEC is a mathematic correction process to set off signal errors that occur during satellite transmission. If it weren't for this process, most of us would never be able to enjoy reliable satellite reception with reasonably small antennas.

The FEC N/M value specifies how many M (gross) bits need to be transmitted for each N (net) bit. An FEC of 1/2 therefore means that two gross bits are required for each net bit, with 3/4 it is four gross bits for 3 net bits and so on. The higher the FEC value, the lower the possibilities of mathematically correcting a faulty signal. If, for example, an FEC of 7/8 is in place you will need a very large antenna for reliable reception.

So basically, the FEC defines the size of the required antenna and this way the FEC of a transponder can be modified to allow for either easy reception with an FEC of 1/2 or very difficult reception with an FEC of 7/8. As a matter of fact, the new DVB-S2 standard brought about even more FEC modes such as 2/3, 3/5, 4/5, 8/9 or 9/10.

RAI Amsterdam

Conference 6-11 September : Exhibition 7-11 September



Get Connected at IBC

The lightspeed penetration of internet connected devices and the services that run on them are making content available on demand anywhere and with an unprecedented degree of personalisation.

The IBC Connected World is a special area of IBC which encapsulates the very latest developments in mobile TV, 3G and 4G services with the pioneering applications and technologies that are driving content over-the-top into the home and into our future. Meet the application developers, content providers and new technology companies revolutionising tomorrow's media industry.

You can also take advantage of the **FREE Demonstration Area** which will be showcasing innovation and providing a platform for discussing how emerging and potentially disruptive technologies can find their place within the overall broadcast industry value chain.

Visit the IBC Connected World in Hall 14 to find out more.



Scan for more
information

www.ibc.org/ibcconnectedworld

IBC Fifth Floor International Press Centre 76 Shoe Lane London EC4A 3JB UK
T + 44 (0) 20 7832 4100 F +44 (0) 20 7832 4130 E info@ibc.org

**Register now at
www.ibc.org/register**

■ Diego Rosende from Tenerife, Spain



■ Satheesan Puzhakkara from Thiruvananthapuram, India



■ Ron Roessl from New York, USA

Transponders lying close to each other

The reception parameters required by standard users for their satellite receivers are average values. In other words, a transponder with a specified frequency of 12,600 MHz in general is not received at precisely this frequency but rather at an optimum frequency of, say, 12,598 MHz.

This deviation between nominal and optimum frequency is caused by the LNB converter and cables, among others. Digital satellite receivers are designed to detect the optimum frequency and adjust their internal reception parameters accordingly.

Strong transponders with sufficient spacing between each other therefore hardly cause any problems due to this impreciseness, but SCPC transponders with identical or similar symbol rates, which are close to each other and of which one transponder is significantly stronger than the other will cause receivers to lock the stronger transponder and ignore the weaker transponder.

The situation is aggravated by the fact that only very few receivers for private users still have the option of limiting the reception bandwidth, which can be used to force the receiver to select its frequency from a very limited range.

The result of all this is that TV stations can easily hide individual transponders behind others. If you're eager to find out how your receiver at home copes with this, you can try to receive horizontal channels between 11,619 MHz and 11,645 MHz on NSS7 at 22° West. The same is true for channels between 12,507 MHz and 12,655 MHz on EUTELSAT SEASAT 36° East – here too many receivers will try in vain to lock in a signal.

As you can see there are many ways for TV stations to restrict feed reception for Joe Average even without resorting to encryption. However, if you're in the know you can react accordingly and use suitable hardware to have your way in the end. In all TELE-satellite reports you will find some reference to a receiver's SCPC capabilities and an account of how sensitively its tuner deals with weak signals.

15th INTERNATIONAL EXHIBITION AND FORUM **CSTB' 2013**

29-31 January, Moscow, Crocus Expo



**DIGITAL CABLE, SATELLITE AND FREE-TO-AIR TV
MOBILE TV • IPTV • OTT TV • HDTV • TV CONTENT
MULTISERVICE NETWORKS • SATELLITE COMMUNICATIONS**

www.cstb.ru

Organizer:

MIDexpo

General partner:



**МИНКОМСВЯЗЬ
РОССИИ**

Supported by:



General information partner:

ТЕЛЕСПУТНИК
ЖУРНАЛ О ЦИФРОВОМ ТЕЛЕВИДЕНИИ

General internet-partner:

COMNEWS

Take Advantage

A young woman with long, wavy red hair and blue eyes is smiling at the camera. She is wearing a red, short-sleeved top with ruffled shoulders. She is holding a black tablet computer with both hands. The tablet screen displays a white rectangular box containing text.

**Read TELE-satellite's Technical
Feature Stories to Know All About
the Digital Developments and
New Technical Breakthroughs
Enjoy Reading TELE-satellite
FREE on Your
Tablet Computer
www.TELE-satellite.com**

Channel Capacity of a Transponder

FEATURE


Audio Transmission

How many SD/HD channels can we get from one transponder?

Jack Pawlowski

Everybody who ever studied satellite charts with transponder data knows that the symbol size of a transponder is one of its most important parameters. And it's not only because you need to know it to get the data in a particular channel, but also because the symbol size directly affects the amount of useful data that can be transmitted via a transponder. The higher it is, the more data can be sent. Now data means more TV and radio channels.

But in our monthly feature, we don't just look at the symbol size of a transponder. We also look at the number of channels that can be transmitted via a transponder. This is a very important parameter, and it's one that is often overlooked. In this article, we will look at the channel capacity of a transponder and how it is affected by various factors. We will also look at the different types of transponders and how they are used. Finally, we will look at the future of transponder technology and how it will affect the channel capacity of a transponder.

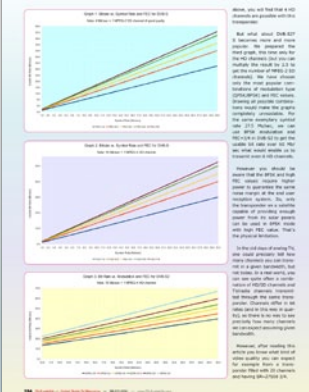

How HbbTV Works

FEATURE

TV Transmission Standard

HbbTV Hybrid broadcast broadband TV Get organized for the inevitable

This will be a surprise for HbbTV satellite viewers. A new standardization initiative has been started to integrate the digital TV world with the Internet. The basic idea is quite clear: make it as seamless as possible for the user. HbbTV satellite viewers often mentioned the obvious truth: the average user is rarely interested through what transmission medium data is coming to their TV sets or monitors. Is it via satellite, via cable or via the air? Or perhaps via Ethernet cable rather than the coaxial one used in CCTV and modems via optical fiber?

This is a logical solution to today's problems. Changing industry mindsets, changing the way we think about TV, and changing the way we think about the Internet, are all part of the HbbTV initiative. The HbbTV initiative is a joint effort between the European Broadcasting Union (EBU) and the European Telecommunications Standards Institute (ETSI). The HbbTV initiative is a joint effort between the European Broadcasting Union (EBU) and the European Telecommunications Standards Institute (ETSI).

And one more thing: the HbbTV initiative is a joint effort between the European Broadcasting Union (EBU) and the European Telecommunications Standards Institute (ETSI). The HbbTV initiative is a joint effort between the European Broadcasting Union (EBU) and the European Telecommunications Standards Institute (ETSI).



www.TELE-satellite.com/TELE-satellite-1101/eng/hbbtv.pdf

CI+ and HD+Encryption

FEATURE

HDTV Copyright Management

How DVB-C2 Works

FEATURE

DVB in its best

Ultimate Spectral Efficiency DVB-C2 is around the corner

Jack Pawlowski

The old DVB-C standard has been in use since 1994. The time for a second generation standard came in 2004. When European cable operators expressed their big concerns about the limited bandwidth they have for the distribution of their services, the major goal was the more efficient use of the available bandwidth in cable networks. The DVB-C2 standard was developed by experts from 20 different companies and countries from various countries. Katalin Douchkova, one of Europe's major cable operators, provided the chairmanship for this effort. The standard was finalized last year and supplements the DVB-S2 and DVB-T2 standards developed earlier.

The new DVB-C2 standard is a significant improvement over the old DVB-C standard. It allows for a much higher data rate and a much higher spectral efficiency. This means that more channels can be transmitted via a cable network. The DVB-C2 standard is a significant improvement over the old DVB-C standard.



www.TELE-satellite.com/TELE-satellite-1009/eng/dvb-c2.pdf

How MPEG Surround Works


FEATURE

Audio Transmission

The New Audio: MPEG Surround Are we to forget the old good audio codecs? Not exactly!

Jack Pawlowski

When we think about digital TV we usually focus on the video performance. The audio is often overlooked. In this article, we will look at the MPEG Surround audio codec and how it works. We will also look at the different types of audio codecs and how they are used. Finally, we will look at the future of audio technology and how it will affect the audio performance of a digital TV.



The MPEG Surround audio codec is a significant improvement over the old audio codecs. It allows for a much higher data rate and a much higher spectral efficiency. This means that more audio channels can be transmitted via a digital TV. The MPEG Surround audio codec is a significant improvement over the old audio codecs.

Streaming TV via the Internet

FEATURE

TV via Internet

Streaming TV via the Internet - Quick Setup and Free!

This wouldn't be the first time that we reported in TELE satellite on streaming solutions that would let you receive TV and radio content via the Internet. In this way you could be on vacation in your hotel on the other side of the world and playback your favorite programs from your living room via an Internet stream or simply watch your favorite TV channels while on vacation.

The TELE satellite streaming solutions are a significant improvement over the old streaming solutions. They allow for a much higher data rate and a much higher spectral efficiency. This means that more channels can be transmitted via the Internet. The TELE satellite streaming solutions are a significant improvement over the old streaming solutions.

www.TELE-satellite.com/TELE-satellite-1007/eng/streaming.pdf

How the SFN Modulation Works

FEATURE

Transmission Technology

Single- and Multi Frequency Networks in Digital Terrestrial Television

Jack Pawlowski

DVB-T2 and DVB-H standards for digital terrestrial TV use COFDM modulation. COFDM stands for Coded Orthogonal Frequency Division Multiplexing and is a quite complex set of digital modulation developed to ensure high bit rate capacity along with interference immunity. The latter feature is what makes single frequency networks (SFN) practically possible.



The SFN modulation is a significant improvement over the old modulation. It allows for a much higher data rate and a much higher spectral efficiency. This means that more channels can be transmitted via a digital terrestrial TV. The SFN modulation is a significant improvement over the old modulation.

Testing Horizon to Horizon Actuator

FEATURE

Horizon-to-Horizon Antenna Actuators

How Can You Test H-H Antenna Actuators?

Heinz Koppitz

H-H antenna actuators are sophisticated components that can turn any mono-feed antenna into a reception system for all locally available satellites. As H-H antenna actuators are capable of receiving all locally available satellites, they are a very important component for any satellite receiver. In this article, we will look at the different types of H-H antenna actuators and how they are used. Finally, we will look at the future of H-H antenna actuator technology and how it will affect the H-H antenna actuator performance of a satellite receiver.



The H-H antenna actuator is a significant improvement over the old antenna actuators. It allows for a much higher data rate and a much higher spectral efficiency. This means that more channels can be transmitted via a satellite receiver. The H-H antenna actuator is a significant improvement over the old antenna actuators.

www.TELE-satellite.com/TELE-satellite-1005/eng/h-h-actuator.pdf

How SCR Works

FEATURE SCR LNB

Thanks to SCR: One single cable for up to eight receivers

Thomas Haring

SCR is short for Satellite Channel Receiver and is a specification defined in the EN 50464 standard, which applies worldwide and which is the result of joint efforts between several companies under the guidance of SES Astra. So what's in it for you?

The standard defines a common interface between the LNB and the receiver. This means that the LNB can be connected to the receiver via a single cable. This is a significant improvement over the current situation where each receiver needs its own cable. The standard also defines the LNB's output power and the receiver's input power. This ensures that the LNB can drive up to eight receivers without any loss of signal.

So, the new SCR LNB is a significant improvement over the current situation. It allows you to connect up to eight receivers to a single LNB. This is a significant improvement over the current situation where each receiver needs its own cable. The standard also defines the LNB's output power and the receiver's input power. This ensures that the LNB can drive up to eight receivers without any loss of signal.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0911/eng/scr.pdf

How Decoding Works

FEATURE Pay TV

Decoding of Encrypted Content

Thomas Haring

The currently used DVB standard provides for encrypted channels to be decoded according to the following procedure: A subscriber receives a smart card. This smart card is equipped with a key that is required to decode encrypted channels and/or programs. The relevant key is sent to the card via satellite. As each card features a unique serial number card providers are in a position to activate or deactivate each individual smart card as necessary. In order to decode the encrypted transport stream transmitted by the satellite a code is required which is generated every few seconds. This code is calculated directly by the LNB or - in case a proprietary receiver with built-in card reader is used - by the internal chipset of the box, using a number of different parameters which include - among others - the key that is stored on the smart card.



© 2008 www.Thai-D.com/sat-art

That might offer all the features there are, but it's not a simple task. In order to decode encrypted content, a subscriber needs a smart card. This smart card is equipped with a key that is required to decode encrypted channels and/or programs. The relevant key is sent to the card via satellite. As each card features a unique serial number card providers are in a position to activate or deactivate each individual smart card as necessary. In order to decode the encrypted transport stream transmitted by the satellite a code is required which is generated every few seconds. This code is calculated directly by the LNB or - in case a proprietary receiver with built-in card reader is used - by the internal chipset of the box, using a number of different parameters which include - among others - the key that is stored on the smart card.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0909/eng/decoding.pdf

How ABS-S Works

FEATURE New Digital Standard

ABS-S: a competition for DVB-S/S2?

Jack Pawlowski

When we were reading a press release about the launch of Zhongxing 9 (ChinaSat 9), it seemed like something quite routine. It was nothing out of the ordinary that China had another DVB satellite in service. It was the coding and modulation the satellite was supposed to use that surprised us. It was neither DVB-S nor DVB-S2. It was something brand new: ABS-S (Advanced Broadcast System-Satellite).

We all know that the introduction of a new digital standard is a very difficult task. It requires a lot of effort and resources. The ABS-S standard is no exception. It is a new digital standard that is designed to be a competition for DVB-S/S2. It is a new digital standard that is designed to be a competition for DVB-S/S2.



© 2008 www.Thai-D.com/sat-art

ABS-S is a new digital standard that is designed to be a competition for DVB-S/S2. It is a new digital standard that is designed to be a competition for DVB-S/S2. It is a new digital standard that is designed to be a competition for DVB-S/S2.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0903/eng/abs-s.pdf

Matching LNB with Dish


FEATURE LNB Types

Matching LNB and Dish Type


Jack Pawlowski

When selecting an LNB for your dish, it is important to match the LNB to the dish. This is because different dishes have different focal lengths and different LNBs are designed for different focal lengths. If you select an LNB that is not matched to your dish, you will experience a loss of signal.

There are two main types of LNBs: offset and center feed. Offset LNBs are designed for offset dishes, which are the most common type of dish. Center feed LNBs are designed for center feed dishes, which are less common. It is important to select the correct LNB for your dish to ensure the best possible signal.



© 2008 www.Thai-D.com/sat-art

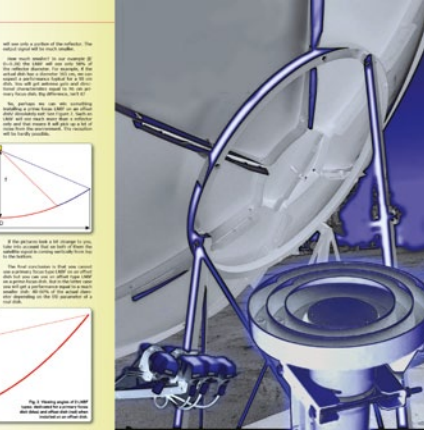

© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0811/eng/lnb+dish.pdf

How to Calculate the Power Factor



FEATURE Energy Saving

Power Factor

Jack Pawlowski

All our satellite power need electrical energy to operate. Obviously, all of us like to have the device that consumes as little energy as possible. And only our bills are lower than that we can protect our environment. In TELE-satellite we usually provide information on power consumption of the tested products. The power is generally expressed in Watts (W) but sometimes also in Volt-Amperes (VA). What is the difference?

The power consumption of a device is expressed in Watts (W). This is the actual power that the device consumes. The power consumption of a device is also expressed in Volt-Amperes (VA). This is the apparent power that the device consumes. The difference between Watts and Volt-Amperes is the power factor. The power factor is a measure of how efficiently a device uses electrical energy.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0809/eng/powerfactor.pdf

How to Solve Problems with DiSEqC

FEATURE DiSEqC

Why DiSEqC Isn't Always Reliable

Heinz Koppitz

The DiSEqC control system, developed jointly by EUTELSAT and Philips, that uses the existing control cable in a two-wire system, is a significant improvement over the current situation where each receiver needs its own cable. The DiSEqC system allows you to connect up to eight receivers to a single LNB. This is a significant improvement over the current situation where each receiver needs its own cable.

There are several reasons why DiSEqC is not always reliable. One reason is that the DiSEqC system is not standardized. This means that different manufacturers use different DiSEqC protocols. Another reason is that the DiSEqC system is not always implemented correctly. This means that some receivers may not be able to communicate with the LNB.

There are several ways to solve problems with DiSEqC. One way is to use a DiSEqC switch. This switch allows you to connect multiple receivers to a single LNB. Another way is to use a DiSEqC adapter. This adapter allows you to connect a receiver to a DiSEqC LNB.

www.TELE-satellite.com/TELE-satellite-0807/eng/diseqc.pdf

How the 3D Diffractive Antenna Works

FEATURE Antenna Design

Development and Application of 3D Diffractive Antennas

V.V. Vukobratovic, O.V. Vukobratovic
Novosibirsk State Technical University, Russia

Parabolic antennas (PPA) have been used for many years. They are a type of antenna that is designed to focus electromagnetic waves. They are used in a wide range of applications, including satellite communication and radar. The development of 3D diffractive antennas is a new area of research that is designed to improve the performance of parabolic antennas.

3D diffractive antennas are designed to focus electromagnetic waves in a different way than parabolic antennas. They are designed to focus the waves in a way that is more efficient and more accurate. This makes them a promising technology for future satellite communication and radar systems.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0805/eng/3ddiffractive.pdf



Relation between Dish Size and EIRP

FEATURE Dish Sizes

Dish Size versus EIRP

Jack Pawlowski

The relationship between dish size and EIRP is a complex one. It depends on many factors, including the frequency of the signal, the gain of the dish, and the power of the transmitter. In general, a larger dish will result in a higher EIRP. This is because a larger dish has a higher gain and can therefore focus the signal more effectively.



© 2008 www.Thai-D.com/sat-art

www.TELE-satellite.com/TELE-satellite-0803/eng/dishsize.pdf

Secrets of the Aspect Ratio

FEATURE Aspect Ratio

Aspect Ratio – Isn't This Simple?

Jack Perlowitz

Aspect ratio is the ratio of image width to image height. Although you may think it's simple, it's not. It's a complex subject that involves a lot of technical details. In this article, we'll explore the various aspect ratios used in digital video and how they affect the way we view content on different screens.

The most common aspect ratios are 4:3 and 16:9. 4:3 is the standard for older CRT monitors and some DVD players. 16:9 is the standard for modern LCD monitors and Blu-ray players. Understanding the difference between these two ratios is crucial for ensuring that your content is displayed correctly on the intended screen.

For example, if you have a 16:9 screen and you play a 4:3 video, the video will be letterboxed, meaning there will be black bars at the top and bottom. Conversely, if you have a 4:3 screen and you play a 16:9 video, the video will be cropped, meaning you won't see the full image.

There are also other aspect ratios, such as 2:1 and 3:1, which are used in some professional video applications. These ratios allow for a wider field of view, which can be useful in certain types of cinematography.

In conclusion, aspect ratio is a technical detail that can have a significant impact on the way your content is viewed. By understanding the different ratios and how they affect the viewing experience, you can ensure that your content is displayed as intended.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0801/eng/aspectratio.pdf

How the Network Connection Works

FEATURE Receiver + Network

The Network Connection – a jack with multiple uses

Thomas Hering

The network connection is a versatile tool that can be used in many different ways. In this article, we'll explore the various applications of the network connection and how it can be used to improve your network performance.

One of the most common uses of the network connection is for connecting to the internet. This allows you to access online content, such as websites, streaming services, and email. The network connection is also used for connecting to other devices on the same network, such as printers and scanners.

Another use of the network connection is for connecting to a remote server. This is often used in cloud computing applications, where data is stored on a remote server and accessed over the network. The network connection is also used for connecting to a remote database, which allows you to retrieve and update data from a central location.

In conclusion, the network connection is a versatile tool that can be used in many different ways. By understanding the various applications of the network connection, you can ensure that you are getting the most out of your network.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0711/eng/networkconnections.pdf

How the Ka Band Works

FEATURE Technology Background (Ka Band)

Ka-Band – the future of satellite communication?

Peter Miller

The Ka-Band is a new frequency band that is being developed for satellite communication. It is located in the 26.5 to 30 GHz range and is expected to be used for high-speed data transmission. This band is expected to revolutionize satellite communication by providing much higher data rates than the current Ku-Band and Ka-Band.

The Ka-Band is expected to be used for a variety of applications, including high-speed internet, video streaming, and data backup. It is also expected to be used for military and government communication. The Ka-Band is expected to be a key component of the next generation of satellite communication systems.

There are several challenges associated with the Ka-Band, including the need for more powerful transmitters and receivers, and the need for more advanced antenna technology. However, these challenges are being addressed by researchers and engineers, and the Ka-Band is expected to be a major breakthrough in satellite communication.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0709/eng/kaband.pdf

How MPEG Works

FEATURE Data Reduction in MPEG

How MPEG really works

An expert view on the deeper secrets of digital compression

Clive J. Grove

MPEG is a standard for digital video compression. It is used in a wide range of applications, including digital video recording, streaming, and broadcasting. The MPEG standard is based on a series of algorithms that reduce the amount of data needed to represent a video frame. This is done by removing redundant information and by compressing the remaining data.

The MPEG standard is a complex system that involves a lot of technical details. In this article, we'll explore the deeper secrets of digital compression and how the MPEG standard works. We'll look at the various algorithms used in the MPEG standard and how they work together to compress video data.

Understanding the MPEG standard is crucial for anyone who wants to work with digital video. By understanding the deeper secrets of digital compression, you can ensure that your video is compressed efficiently and that it is of high quality.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0707/eng/mpeg.pdf

Secrets of Antenna Alignment

FEATURE Dish Alignment

Antenna Underperformance Due to Misalignment


Peter Miller

Antenna alignment is a critical factor in ensuring that your antenna is receiving the maximum signal. In this article, we'll explore the various factors that can affect antenna alignment and how they can lead to underperformance.

One of the most common factors that can affect antenna alignment is the orientation of the antenna. The antenna must be pointed in the correct direction to receive the signal. If the antenna is misaligned, the signal will be weak and the performance will be poor.

Another factor that can affect antenna alignment is the height of the antenna. The antenna must be at a sufficient height to receive the signal. If the antenna is too low, the signal will be blocked by the ground or other obstacles.

In conclusion, antenna alignment is a critical factor in ensuring that your antenna is receiving the maximum signal. By understanding the various factors that can affect antenna alignment, you can ensure that your antenna is properly aligned and that it is performing at its best.

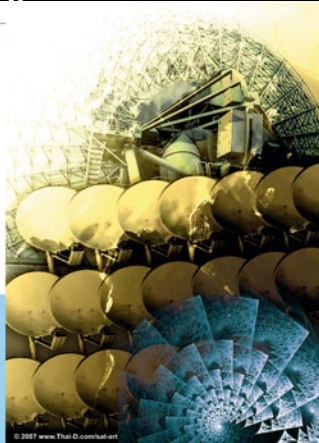

© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0705/eng/performance.pdf

The Secrets of HDMI

FEATURE HDMI

HDMI – the interface not only for HDTV

Peter Miller

HDMI is a digital interface that is used for connecting digital devices. It is commonly used for connecting a computer to a monitor or a television. HDMI is a versatile interface that can be used for a wide range of applications, including video, audio, and data transfer.

One of the key features of HDMI is its ability to carry both video and audio signals. This makes it a convenient interface for connecting a computer to a monitor or a television. HDMI is also capable of carrying data, which makes it a useful interface for connecting a computer to a storage device.

In conclusion, HDMI is a versatile interface that can be used for a wide range of applications. By understanding the secrets of HDMI, you can ensure that you are getting the most out of your HDMI connection.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0703/eng/hdmi.pdf

The Relation of Dish Size and EIRP

FEATURE The ERP Series

Dish Size versus EIRP


Peter Miller

The relationship between dish size and EIRP is a key factor in determining the performance of a satellite dish. In this article, we'll explore the various factors that affect the relationship between dish size and EIRP and how they can be used to optimize the performance of a satellite dish.

One of the most important factors that affect the relationship between dish size and EIRP is the frequency of the signal. The EIRP is inversely proportional to the frequency, meaning that as the frequency increases, the EIRP decreases. This means that a larger dish is needed to receive a signal at a higher frequency.

Another factor that affects the relationship between dish size and EIRP is the gain of the dish. The gain of the dish is a measure of its ability to focus the signal. A dish with a higher gain will have a higher EIRP for a given dish size.

In conclusion, the relationship between dish size and EIRP is a complex one that involves a lot of technical details. By understanding the various factors that affect the relationship between dish size and EIRP, you can ensure that you are getting the most out of your satellite dish.

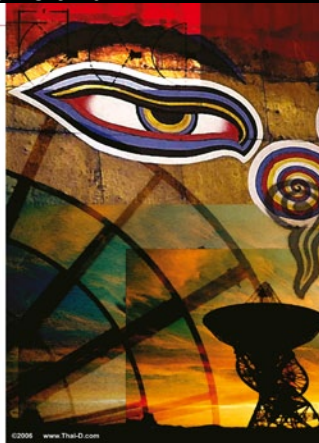

© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0701/eng/dishsize.pdf

The Secrets of Polarization

FEATURE Polarization

Circular or Linear Polarization

Peter Miller

Polarization is a property of electromagnetic waves that describes the orientation of the electric field. There are two main types of polarization: linear and circular. Linear polarization is the most common type of polarization and is used in a wide range of applications, including radio communication and optical communication.

Circular polarization is a less common type of polarization that is used in some specialized applications, such as satellite communication and radar. Circular polarization has the advantage of being less susceptible to interference than linear polarization.

In conclusion, polarization is a key property of electromagnetic waves that can be used to optimize the performance of a communication system. By understanding the secrets of polarization, you can ensure that you are getting the most out of your communication system.



© 2007 www.Thai-Q.com/sat-art

www.TELE-satellite.com/TELE-satellite-0611/eng/polaization.pdf

Mark Your Calendars

to see the next wave of innovations.



2013 International CES®
January 8-11, 2013
Tuesday-Friday
Las Vegas, NV
CESweb.org



2012 SINOCESS
July 5-8, 2012
Thursday-Sunday
Qingdao, China
www.SINOCESS.com



**For details on exhibiting please contact
Exhibit@CESweb.org or 703-907-7645**

Latest Technologies Came To Life at:

CommunicAsia2012 EnterpriseIT2012 & BroadcastAsia2012

- *close to 2000 exhibitors*
- *attendees from more than 56 countries and regions*
- *big get-together of broadcast executives in Asia*
- *showcase of many new technologies in digital tv*

■ Singapore's impressive hypermodern skyline at dawn. Here at the Marina Bay Sands Convention Center the CommunicAsia2012 and EnterpriseIT2012 were held. BroadcastAsia2012 took place at the Suntec Singapore Convention Center.

[Foto: Luo Shigang]





Attendees to established industry trade shows immersed in the latest innovations and key discussions with business leaders

CommunicAsia2012 and EnterpriseIT2012 and BroadcastAsia2012, Asia's three focal industry venues for ICT, digital broadcasting and entertainment technology industry professionals, was held in Singapore; the first two at the Marina Bay Sands Convention Center and the latter at the Suntec Singapore Convention Center.

Attendees from more than 56 countries and regions were counted over the four days the venue lasted. Close to 2,000 exhibitors presented the latest technologies in next generation fibre broadband, M2M technology, cloud security, DVB-T2, Over-the-Top Technology (OTT) and more. Conference speakers addressed pertinent industry topics and presented insightful industry trends and views. About 49,000 attendees including exhibiting staff, visitors, conference speakers and delegates, and members of the media were at this year's CommunicAsia, EnterpriseIT and BroadcastAsia.

"The shows brought together like-minded industry professionals to network, discuss current trends and challenges, exchange ideas, and forge new partnerships. This year, we received positive response to the new conference tracks, increased hospitality suites and new tech zones," says Mr. Stephen Tan, Chief Executive of show organizer, Singapore Exhibition Services (SES). "We will continue to evolve the content and format of our shows to be in tune with the latest trends and technology advancements, to meet the most current needs of the industry. This is why exhibitors and visitors, speakers and delegates, return to the shows, year after year. Our gratitude goes out to all participants who have contributed to the success of the event, and we look forward to staging yet another successful event in 2013," Mr. Tan adds.



■ Stephen Tan is Chief Executive of Singapore Exhibition Services, organizer of the CommunicAsia, EnterpriseIT and BroadcastAsia exhibitions held in each year in Singapore.

Latest Technologies and Innovations at CommunicAsia2012

The Huawei booth, individual largest exhibitor at CommunicAsia2012, wowed the crowd with its new, sleek range of consumer and enterprise products, including the Android-powered Ascend handsets and mobile Wi-Fi devices. "Huawei sees the value of participating

in CommunicAsia, and has committed to not only make an appearance, but to surprise our customers through Huawei's innovative end to end ICT solutions. The Huawei booth received overwhelming attention from the crowds, ranging from business partners and

enterprise customers to end users who are interested in the latest release, signature Huawei smartphone – Ascend P1," says Mr. Lim Chee Siong, CMO of South Pacific Region, Huawei.

■ Huawei presented the new Android-powered Ascend handset [Foto: Luo Shigang]



Asia-Pacific's Largest Broadcasting Show



CHINA CONTENT BROADCASTING NETWORK 2013

March 2013 China International Exhibition Center · Beijing
www.ccbn.tv



Hosted by
State Administration of Radio, Film and Television

Tel: +86-10-8609 1557/2648/5411/5435/5613/5614/4092/4095/2133 Fax: +86-10-8609 4090
E-mail: wangyanhua@ccbn.cn hewei@ccbn.cn wuhongchuang@gmail.com



■ ST Electronics showed data management and resource utilisation for public utilities
[Foto: Luo Shigang]

ST Electronics also attracted a continuous stream of visitors with its Smart Cities showcase of the latest in data management and resource utilisation for public utilities – a technology concept that is making waves across the globe.

MAVEN – a robot from Nan-yang Technological University's Institute for Media Innovation – excited the crowd with its ability to recreate a 3D representation of its surroundings as it travelled the exhibition floor. MAVEN, in addition to Singapore Polytechnic's Express Melody, a solution that leverages on cloud technology and helps businesses to attach a unique sound to their brand, were amongst some of the innovations showcased at the new Discovery Lounge at CommunAsia2012.

■ 3D presentations at CommunAsia2012
[Foto: Luo Shigang]





■ TELE-satellite Magazine's booth at CommunicAsia2012 in Singapore [Foto: Luo Shigang]

Human IT Solutions in the Korea pavilion unveiled 'Human Gate – Lite', an indoor gateball system using infrared motion capture of the whole body so that the player does not need to wear any equipment or use a handheld device.

EnterpriseIT, held in conjunction with CommunicAsia, showcased exhibitors comprising international IT systems providers and companies offering enterprise solutions ranging from cloud computing, data centre services, security and M2M, to mobility solutions and video conferencing. Mr. Adrian Tee, Head of Software Solutions of O'Connor's Singapore declares, "This is the first time the O'Connor's Software Solutions Business Unit is participating in CommunicAsia to showcase two software solutions, Puffersoft Labs' reverse cloud desktop virtualisation and Zenprise's mobile device management. We are surprised and pleased with the overwhelming response and interest we received from customers and potential partners in the region. Our teams were engaged in back to back meetings from the start of the day till way past closing time. The exhibition certainly exceeded our expectations."

The special OTT feature area, one of the star attractions at BroadcastAsia2012, saw a huge number of visitors stopping to catch a glimpse of the Euro2012 on various platforms including TV, laptop, tablet and mobile phone; and other content contributed by Sony Pictures. A consortium of exhibitors facilitated this multi-platform delivery of content. The Cinematography/Film/Production zone drew packed audiences keen to see and learn about the latest motion picture tools and software. The Media Village's hourly demonstrations of the most exciting post production and visual effects solutions was seen to be highly popular with the audience. An interesting draw was the photography subject Sony used to demonstrate the features and versatility of its cameras – a sparkling Mini Cooper. Sony showcased its PMW-100 professional camera that is particularly popular in broadcasting stations and production houses for gathering news and producing documentaries.

"As Topas TV is a new DTH satellite and pay TV station broadcasting 65



CommunicAsia2012



■ High level interviews were conducted during the venue and transmitted live to a worldwide audience

channels, I came to BroadcastAsia2012 to shop for equipment from set-top boxes to head-end products and encoders. I visited COSHIP, Harmonic, Wellav, Grass Valley and Ideal Systems, as well as updated myself on the newest technologies. I am happy with the management of the exhibition. Everything is very well arranged," says Mr. Michael Mulyanto, Chief Operating Officer, Topas TV, Indonesia.

The CommunicAsia2012 Summit, BroadcastAsia2012 International Conference and Creative Content Production Conference, received overwhelming response from delegates, with

exciting questions and discussions generated during the sessions, workshops and panel discussions. Over 200 speakers including two visionary speakers, Ms. Aliza Knox from Google and Ambassador David Gross from Wiley Rein LLP, ensured delegates had something to debate. The BroadcastAsia2012 International Conference and Creative Content Production Conference featured speakers from some of the media and broadcasting industries' most successful companies including Fremantle Productions, Lucasfilm Animation, Pinewood Iskander Malaysia and Pixelmetrix Corporation, sharing

their expertise and experiences working on world-famous projects. "The conference experience has been very informative. It covered a wide range of topics, and dealt with convergence and new technologies which helps us to keep abreast of developments," says Mr. Mautik Tolia, Executive VP (Programming), NEO Sports Broadcast.

The next exhibitions CommunicAsia2013, EnterpriseIT2013 and BroadcastAsia2013 will all three be held from 18 -21 June 2013 at Marina Bay Sands Convention Center in Singapore.

More information:
www.communicasia.com



■ A packed audience at the BroadcastAsia2012 International Conference



KWS ELECTRONIC
HIGH FREQUENCY TEST EQUIPMENT

New accessory:

Stable protection bag
for use outdoors.

VAROS TECHNOLOGIE

For satellite specialists — our new satellite measuring receiver VAROS 109:

910-2,150 MHz, level/BER/MER for all digital Sat-transponders, DVB-S/DVB-S2, MPEG 2/MPEG 4 HD video, SAT scan function, DVI-out, Common Interface slot, spectrum analyzer narrow-/wide-band, measurement data memory through USB, DiSEqC, UNICABLE, JESS...



KWS-Electronic GmbH

Tattenhausen · Sportplatzstrasse 1 · 83109 Großkarolinenfeld · Germany · Phone 0049 .8067 .9037-0 · info@kws-electronic.de · www.kws-electronic.de

Watch & Record digital TV on your iPad2/New iPad/iPhone 4S

T800 iDTV iPad tuner

Free Apple app
Friendly user interface
30-pin dock connector
No internet connection required
free DVB-T and ISDB-T channel support



Android model ready in early September



TeVii H650
DVB-T2/DVB-T/ DVB-C 3-in-1 USB stick



TeVii D460
D460 HD Capture Card
Low profile & PCIe interface
Up to 1920x1080P capture resolution
HDMI digital input
HDCP support



S482
Dual DVB-S2 PCIe Card



S471
DVB-S2 PCIe Card



S421
DVB-S PCI Card



S464
DVB-S2 PCI Card



S632
DVB-S USB



S660
DVB-S2 USB Box



TeVii Technology Ltd.

TEL:+886-2-8692-6008 FAX:+886-2-8692-6808
7F, No. 143, Sec. 2, Datong Rd. 22183 Xizhi District, Xinbei City
Taiwan, R.O.C. sales01@tevii.com


Worldwide Distributors & Customized OEM are welcome

Impressions from CommunicAsia2012

[Fotos: Luo Shigang]





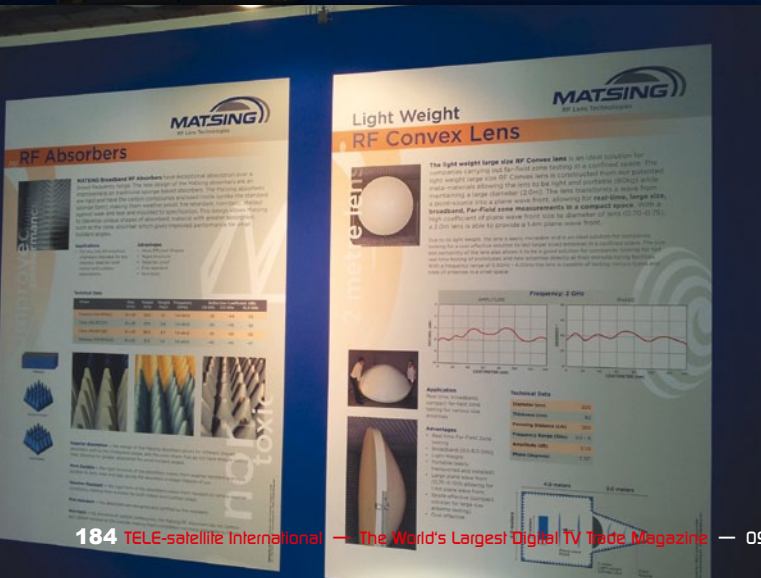

digipower motor

The Best Solution for Motorization DiSEqC H-H Motor

- * SG-2100A 
- * SG-2300 (Semi-metal Gear)

- 1.2m Dish max.
- 60 Memories
- Controlled by Receiver
- Powerful, Fast and Low Noise
- Manual E / W Button
- Goto X.X° Function
- Indicating LED for Easy Trouble Shooting
- Stainless Steel U Bolts to against Corrosion

DiSEqC Positioner

V-Box II

- 99 Memories
- Controlled by Receiver
- 3 Digit LED Display
- Full Protective Design
- Optional Remote Control
- Software Limit Protection

Stand Alone Positioner

MP880

- 99 Memories
- IR Remote Control
- 3 Digit LED Display
- Software Limit Protection

EZ-2200



MOTTECK
ELECTRIC CORP.
MOJORIZE YOUR ANTENNA
actuator, control, polar mount, cable

1F-1, NO.79, SEC1, SHIN-TAI 5 ROAD, SHIJR CITY, TAIPEI HSIEN, TAIWAN
TEL: +886-2-2698-1220 FAX: +886-2-2698-1324 E-mail: moteck@seed.net.tw http://www.moteck.com

BluBox 8/16

SPAUN™
www.spaun.com Quality made in Germany



Compact Headend 8/16 x DVB-S(2) into QAM BluBox 8 and BluBox 16

- 8 / 16 x DVB-S(2) (QPSK/8PSK) into DVB-C (QAM)
- For the reception of 60/120 TV programs SD/HD and 30/60 Radio programs
- Compact dimensions and high energy efficiency
- LNB control with 14/18 V + 22 kHz or DiSEqC
- Configuration via LAN/IP
- Complete processing of the transport streams possible
- All 8 / 16 output channels can be placed individually in the spectrum
- Two individual input ports



SPAUN electronic GmbH & Co. KG · Byk-Gulden-Str. 22 · 78224 Singen
Tel.: +49 (0) 7731-8673-0 · Fax: +49 (0) 7731-8673-17
Email: contact@spaun.com · www.spaun.com

NORTH POINT
BUSINESS PARK
320 & 322 NORTH POINT PARKWAY
SHAHEEN & COMPANY
(404) 237-2100

Americas Busiest Satellite Enthusiast Tim Heinrichs f

- *Always working enthusiastically on new products*
- *Special focus on signal analyzers for the semi-professional*
- *Enormous growth of the international market outside of North America*
- *Innovative expansion of signal analyzer models for 2012*

■ DMS International could be found here in the Northpoint Business Park with its two buildings and attached warehouse.



from DMS

Actively Involved in Satellite Business for 33 Years

There aren't too many companies that have hung around for decades and at the same time are still in the same business segment. DMS International, which has been in existence since the very early days of TV reception via satellite, belongs to that group. Tim Heinrichs is Founder and CEO of satellite wholesaler DMS International and if you've been in the same business for so long, there's absolutely no doubt that you are a real enthusiast. In the small town of Acworth, not too far from Lock-

heed and Marietta northwest of Atlanta, Georgia, USA, we found Tim Heinrichs and his wife Vicky, the President of the company. We wanted to know how DMS International became what it is today.

Tim Heinrichs has been a DXer for a long time: he was excited about CB communications when it first started and all that could be done with it. It allowed people for the first time to

communicate wirelessly with each other without too much in the form of technical requirements. Oh really? In 1968 Tim erected a tower 25 meters high for his CB antenna. He used it to listen in when railroad employees talked to each other, when construction companies passed on work orders to their builders, when truck drivers warned others of radar traps on the highways and when the police would coordinate road blocks with their headquarters. But Tim was especially fascinated with the phenomenon of "skip" transmissions: under certain weather conditions CB radio transmis-




Acworth,
Atlanta, GA, USA



■ Tim Heinrichs, DMS International's CEO, in his office in Acworth, Georgia, northwest of Atlanta. He's testing an FS2 signal analyzer beta model.



Innovative DVB-S2/S DVB-T2/T DVB-C PC TV Tuners



DVB-S2 Dual Tuner Dual CI PCIe Card (TBS 6991)

1. Dual Tuner for Recording Two Different Channels/Transponders.
2. Unicable/One Cable compatible.
3. Dual Common Interface Support.
4. Transponders Blindscan.



DVB-S2 Quad Tuner PCIe Card (TBS 6984)

1. DVB-S2/DVB-S SD or HD TV Receiving.
2. Four Tuners for Recording Four Different Channels/Transponders.
3. Transponders Blindscan.




DVB-T2/T Dual Tuner PCIe Card (TBS 6280)

1. Both DVB-T2 and DVB-T are supported.
2. Dual Channel Receiving simultaneously.
3. Low Profile Size.




DVB-T2/T/C TV Tuner CI USB Box (TBS 5880)

1. DVB-T2/T/C SD or HD TV Receiving.
2. Time Shifting to Pause Live TV.
3. Common Interface Support.



TBS 6928

DVB-S2/S TV Tuner
PCIe CI Card



TBS 6925

DVB-S2/S Professional
TV Tuner PCIe Card



TBS 6618

DVB-C TV Tuner
PCIe CI Card



TBS 5680

DVB-C TV Tuner
USB CI BOX



TBS 5280

DVB-T2/T Dual Tuner
USB TV Box



TBS 5980

DVB-S2/S TV Tuner
USB CI Box

Tenow International Ltd
Email: sales@tbsdtv.com

www.tbsdtv.com
Tel: (+86) 755 26501345 or 26501201

Worldwide distributors/dealers are welcome!

DEVISER

www.devisertek.com

AE120 ✓ Mini Optical Power Meter

- Pocket size
- Cost-effective
- Power efficient: Up to 50 hours working time with 2 Ni-MH 5AA batteries
- Optical-detector: 3000μm Ge
- Wavelengths: 780nm~1700nm
- Input Range: -43dBm ~ +27dBm
- Basic Accuracy: ±1% and ±0.05dB
- Full Range Accuracy: ±5% and ±0.21dB
- Optical Connector: FC/SC



Deviser Electronics Instrument Co., Ltd

No.40 Yibin Road, Nankai District, Tianjin 300113, China

Tel: +86-22-27682088, 27645003 ext 803 ■ Fax: +86-22-27645002

Http://www.devisertek.com ■ E-mail: overseasbiz@deviser.com.cn

DEVISER

1



2



sions in the 27 MHz range would skip off the ionosphere or troposphere allowing for two-way communications over extremely long distances. "Back then I collected QSL cards from my contacts and managed to collect nearly 1000 of those cards."

Tim also worked for the railroad in Nebraska and when word got around among his friends and coworkers that he liked to tinker with radios in his free time, they began bringing him defective radios, TVs and CBs. At first it was tedious, but later on it became routine for him to repair these devices. "Even the police came to me to repair their radios." Tim was becoming more and more experienced in radio technology. In 1979 he read an article in a technical magazine about satellite reception. This new technology was irresistible to Tim; he simply had to have it. He spent a lot of money on his first three-meter dish. "Back then the dish antennas were

quite heavy; they were made of fiberglass with metal braces and weighed 400 pounds." Tim still remembers today what an experience it was to be able to receive a TV picture with his new dish. "It was an absolute sensation to be able to receive a signal from space from so far away."

Then came the turning point in Tim Heinrichs' evening job: a farmer bought that dish from him. "That's when it all started, next I bought two new dishes." That was in 1980 and it was at this point that Tim Heinrichs recognized that there was a new business brewing. He sold and installed these dish antennas at a faster and faster rate. The breakthrough came in 1982: "I invested \$40,000 and bought my first truckload of dishes - it was 500 three-meter antennas." Tim Heinrichs young company became a satellite wholesaler.

"At first I worked both jobs; my regular job at the railroad and at nights and weekends at my own company DMS International." That only worked for a few months: he had to make a decision and naturally he chose his own company. "My wife Vicky worked along side me from the beginning; at first she took care of the books and now she's the

President of the company."

In 1991 another big decision had to be made: the market in Nebraska was covered so in order to better expand his business the decision was made to move his company to Atlanta, Georgia. DMS International can still be found there today. "Transportation costs are cheaper here", rationalizes Tim regarding this decision and then grins as he adds, "Besides, the weather is much better here." Sure enough, the company experienced quite a boom in business. Vicky provides us with a few sales figures: "In 1991 DMS managed sales of roughly \$2.0 million." The company's best year was 2008: "Back then we had sales of \$12 million. Sales have pulled back a little bit since then although in 2009 they were still at about \$9.0 million."

For many years DMS International was a small company with very few employees: It was Vicky and Tim along with one or two warehouse and administrative employees. "Today we have 10 employees with a warehouse that is 14,000 Sq-ft in size." Up until recently DMS International was mainly focused on the North American market, "that is, the USA, Canada and Mexico", explains Tim. As recently as 2009/2010

1. Vicky Heinrichs is the President of DMS International and runs the administrative side of the company.

2. Ivy Bliss is the receptionist and takes care of DMS International's website (www.dmsiusa.com). If you call the company, Ivy is your first contact.

3. Tina Ryan handles the accounting



70% of all shipments were sent to this local market. "That all changed dramatically in 2011", reveals Tim to us, "Export shipments sharply increased to 60%." The largest increase was for shipments to South America (30%); other large markets for DMS International are India, Africa and surprisingly Portugal. "Some shipments from Portugal find their way back to Brazil", says Tim regarding the occasionally roundabout paths that can be taken in the global marketplace.

As a satellite wholesaler, DMS International for many years sold everything that an installer would need. It's not like that today anymore. DMS International is now concentrating on a few product segments. "Our largest sales item is satellite signal analyzers at around 50%. We produce analyzers under the brand name 'First Strike'." Tim wants to take the newest version of these analyzers and further expand his export business: "My goal is analyzers that can be used anywhere in the world." Another important segment is LNBs: "They account for roughly 25% of our sales." That is only accomplished because DMS International sells large numbers of LNBs; the margin with LNBs has in the meantime become very small. "We also sell multi-switches, receivers and dishes."

Vicky has some more numbers for us: "In 2011 we sold about 30,000 signal analyzers, roughly 100,000 LNBs and around 15,000 receivers." In 2008 DMS International began marketing their own line of signal analyzers under the brand name 'First Strike' and the first model FS1. The successor model FS2 is planned for release when this report is published and will soon after be supplemented by the FS2Pro. The FS2Pro will be for DVB-S2 with a color display and - according to the plan - a GPS receiver for the direct display of satellite antenna data (azimuth and elevation). "Our signal analyzers are not modified satellite receivers; instead they are true measurement instruments", comments Tim, "that provide comparable measurement data." Additional 'First Strike' models include a cable TV analyzer as well as a terrestrial model. "We're making sure that these signal analyzers can be used internationally. The cable analyzer will operate on an expanded frequency range so that it will cover every possible cable TV network." Tim has something special in mind for the terrestrial analyzer model: "It will be able to receive every known signal standard - ATSC, ISDB-T and DVB-T."

Obviously, Tim Heinrichs still has the



■ Who needs a satellite dish? Warehouse Manager Luis Burrión is responsible for shipping their products.



DMS International
www.dmsiusa.com
sales@dmsiusa.com
HOTDISH90

Ku BAND SATELLITE ANTENNA

Model	HOTDISH90
Specification	90 cm
Weight	kg
Thickness of steel	0.7 mm
Thickness of finished product	0.8 mm
Lot Number	




■ An antenna by the stockroom serves as a test bed to check out the LNBs.



■ A selection of LNBs that DMS International distributes. The Avenger model using PLL technology is one of their best sellers.



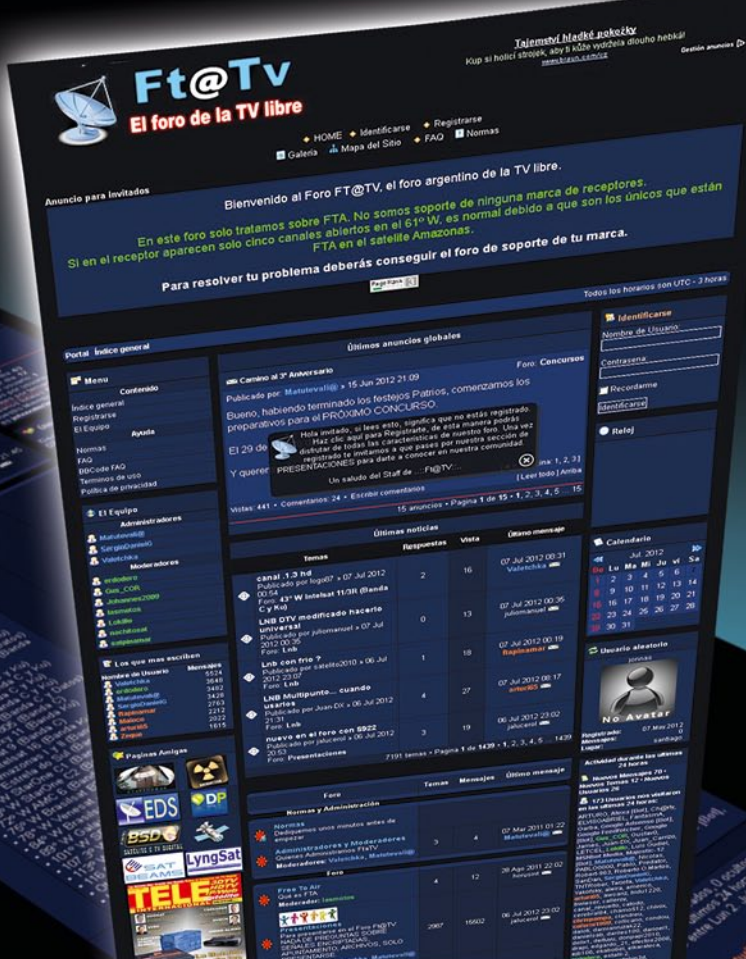

Ft@TV
El foro de la TV libre

Welcome to FT @ TV Forum, the forum free Argentine TV. In this forum we discuss FTA only. We do not support any brand of receivers. If the receiver only opens five channels at 61° W, it is normal because they are the only ones that are FTA on the satellite Amazonas.



Hi guest, if you read this, it means you are not registered. Click here to Register, so you can enjoy all the features of our forum. Once registered we invite you to walk through our Presentations section to let you know in our community. A greeting from the staff of Ft @ TV ...



www.ftatv.com.ar

SPAUN
www.spaun.com Quality made in Germany

VAM 420 NG PAL

VSB Twin Modulator VAM 420 NG PAL

- Easy to create analog tv signals
- Extremely good technical specifications
- Simple and fast programming
- Cascading allows for multiple TV analogue channels
- TV standard: B/G/D/K/I/L
- Frequency range: 110 ... 862 MHz
- Output level: max 90 dBμV
- C/N ratio: ≥ 50 dB



VAM 420 NG DVB-T

- Modulator with COFDM (DVB-T) output signal



SPAUN VAM 420 NG PAL
Easy way to create analog tv channels

www.TELE-satellite.com/
TELE-satellite-1209/eng/spaun-VAM.pdf



SPAUN electronic GmbH & Co. KG · Byk-Gulden-Str. 22 · 78224 Singen
Tel.: +49 (0) 7731-8673-0 · Fax: +49 (0) 7731-8673-17
Email: contact@spaun.com · www.spaun.com



1



2

1. Extremely popular just a few years ago, today there's not much demand for C-band scalar rings.
2. Demand has also declined here: Combi LNBs for the C-band and Ku-band
3. DMS International has a specialty to offer: LNBs from INVACOM that can receive both circular and linear polarizations at the same time

same enthusiasm that he had 33 years ago. He consistently comes up with new ideas and new products that allow him to conquer new markets. After so many years of experience he knows that existing markets can disappear but that there are always new markets that provide new opportunities. Tim Heinrichs remains devoted and is always keeping an eye out for the latest technological advancement.



3

CHINA'S BEST FORUM on Digital Video Broadcast



www.dvbcn.com

Read it in English: <http://translate.google.com/translate?hl=en&sl=zh-CN&tl=en&u=http://www.dvbcn.com>

HotTVNews
WiredNetworkDVB-S
DVB-C TV-operators
VoIP-IPTV TV-advertising
IntelligentTelevision
MobileTV
OnlineVideo
TVVideoEDA
Pay-TV BroadcastSecurity
DABHDchannelsLaunchCoverage
DTMB Television CM-MB-network
DVB-T MonitoringSTB-Design
Internet
radioMDTV TV-Software
IPTV CPU Digital
CATV

FORUM

TECHNIK B-SAT KFT.

1081 Budapest, Hungary
Kiss József u. 14.
tel.fax: +36 1 789-5274
mobil: +36 70 279-2982
info@technikb-sat.hu
www.technikb-sat.hu

TEHNIC B

Timisoara, Romania
B-dul 16 Decembrie 1989 nr.41
tel.: +40 356 006000
fax: +40 356 006003
tehnicb@rdstm.ro
www.tehnicb.ro



OFFSET SATELLITE ANTENNA, STEEL
65 / 80 / 90 cm



THB-SAT SINGLE LNB



THB-SAT TWIN LNB



THB-SAT QUAD LNB



WALLMOUNT SPL 42



INTELSAT - HOTBIRD
DOUBLE LNB HOLDER



DISEQC 2/1 SWITCH



TELEMAN 1600
DIGITAL SATELLITE METER



THB-SAT RG-6U COAX CABLE
ROLL 100m OR 300m



F-CONNECTOR (100 pcs.)



■ An interesting side business is reception dishes for commercial services such as wireless data transmissions. Tim Heinrichs shows us a reflector from one of these professional reception antennas.



Success in the Millions From Topsignal



- *OEM delivering exclusively to Wholesalers*
- *Specializes in large production quantities*
- *Produces millions of satellite dishes and LNBs*
- *Majority of shipments go to South America*
- *Expanding product palette to include high-quality LNBs and VSAT*



■ Topsignal's production plant in Ninghai, China. The administration building is to the left and two of the four production buildings are to the right. Satellite dishes and LNBs are manufactured here in large quantities.

Enormous Numbers for the World Market


With a yearly production of five million satellite dishes and even more LNBs, Topsignal is one of the largest manufacturers of these products. The company actually started in a completely different product segment: actuators and motors for satellite dishes. It's an unusual development that we had a look at in the small city of Ninghai. Ninghai is located near Ningbo which itself is a three-hour train ride south of Shanghai.

Zongbao King founded the company

in Ninghai back in the year 2003. Back then antenna motors for satellite dishes were in demand and Zongbao King built a production facility for these motors. "Unfortunately, today there's not much demand for these motors anymore", explains Sales Manager James You to us. Order quantities have steadily decreased, "but we can still handle any kind of order since our storeroom is still fully stocked."

Two other product groups are today's sales giants at Topsignal: "In 2008 we

started manufacturing satellite dishes and in 2011 we started producing LNBs." The quantities are huge: nearly a half million satellite dishes are produced monthly and even more LNBs. The reason these production numbers are almost the same is simply that the dishes and LNBs are sold in sets. A

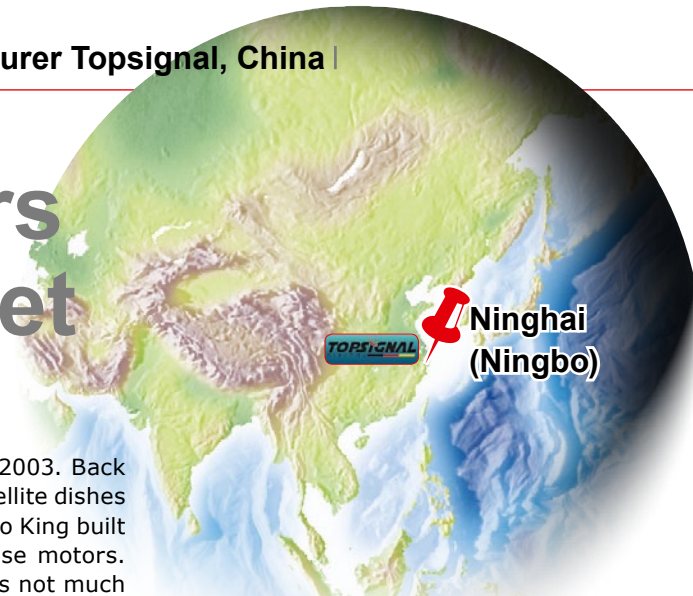

**Ninghai
(Ningbo)**



■ Topsignal's Founder and
Chairman of the Board
Zongbao King

AI Turbo S2

Satellite Meter

- Rugged
- Versatile
- Easy

DVB-S2 Turbo DVB-S Digicipher-2
DSS/DIRECTV Legacy
950-2150MHz 250-750MHz



Indianapolis, Indiana USA

www.appliedin.com



RESELLERS WANTED

DishPointer AR

See where to point your dish, live on the iPhone screen!

The revolutionary DishPointer Augmented Reality app is now available on the app store. Just point your iPhone anywhere towards the sky and see all the satellites lined up on the live video screen.

**See the
Video**

See DishPointer AR in action on YouTube!

This app uses the iPhones GPS, motion sensor and compass to calculate all the satellite positions and overlays them on the camera. At a glance you will see where to point the dish and any obstacles blocking the line of sight.

DishPointer is the world's No.1 satellite dish pointing site, offering custom built tools for mobile devices or websites to businesses. For more information, visit www.dishpointer.com.



References



www.dishpointer.com
info@dishpointer.com

large portion of their production is for the 60cm and 90cm variants; a smaller portion is for 75cm antennas.

Where do these antenna sets end up? "Roughly 80% of our production gets shipped to South America, above all to Brazil."

However you won't have much luck searching for the Topsignal brand name in Brazil: the company is an original equipment manufacturer (OEM) and the satellite dishes and LNBs are shipped without any name stenciled on them. "We work together with an agent who resells the sets in Brazil and adds the brand names of the large customers right there in Brazil."

Topsignal's next largest shipping zone

A small in-house team of 10 R&D engineers is currently working on this but Topsignal also receives additional design input from outside specialists for these new markets. "We are currently working on a new LNB series with specifications that are far better than our current production."

As you can see, Topsignal is consistently working on improving their products. At the moment, Topsignal's LNB assortment consists of Single, Twin and Quattro LNBs; additional variants are in the works.

Sales Manager James You is very optimistic with their new LNB series. He takes a look into his crystal ball: "In 2011 our sales amounted to roughly 50



TOPSIGNAL

DIGITAL

is The Middle East and Africa accounting for 15% of deliveries. The remaining production goes to large distributors and dealers in Southeast Asia. "1.5 and 1.7-meter mesh antennas are quite popular there."

Now Topsignal is looking to penetrate the large markets in Europe and North America. "We want to start there by concentrating on our LNB products such as the Ka-band LNB in the USA." But VSAT is also on the list of newly developed products from Topsignal.

million RMB (about US\$8 million), but for 2012 we foresee a 30% increase due in large part to our new and improved products."

With its enormous quantities, Topsignal has managed in just ten years to work its way up into the top class of manufacturers. With new and improved products and the expansion into new markets, Topsignal wants to continue this success.

The next 10 years should be very exciting at Topsignal!

■ The receptionist
greets every visitor



1




1. Chaofeng Ge is General Manager. He coordinates production and is always on the phone coordinating production with customer orders.
2. James You is Sales Manager and counts on the help of the Lion in front of the entrance to Topsignal's building.

2



3

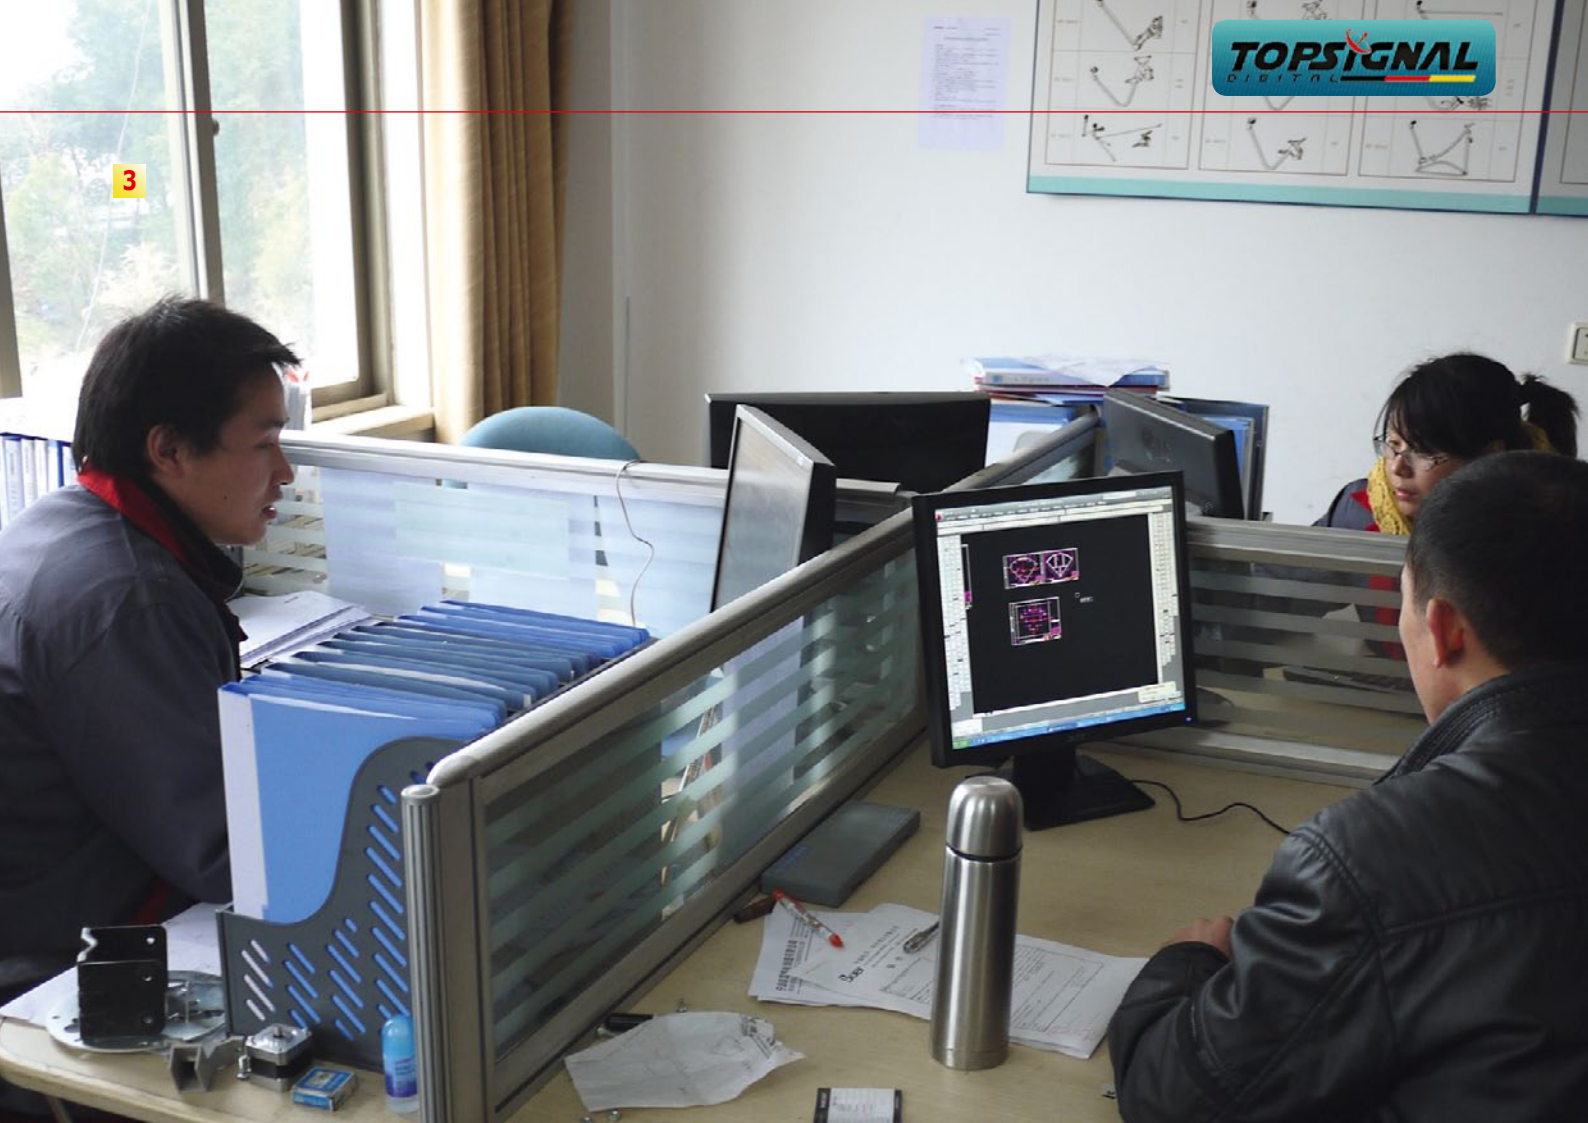

4



3. Some of the R&D engineers. A total of 10 engineers work here.
4. View of the four production buildings as seen from the administration building



1



2



4



3



5

1. This is just a small portion of the in-line storage area. The dishes wait here for further assembly.
2. One of the many steps involved in a completed dish: the raw shapes are hung on a chain and driven through a paint station.
3. Another paint station is used for the smaller dishes.
4. Employees inspect each and every dish for defects. Those that pass inspection are placed on a palette; those that fail are removed from the rest.
5. The mounting holes are punched here
6. Topsignal sells satellite antennas and LNBs in sets. Naturally mounts are also included. Wall mounts are pressed into shape here. Topsignal uses pipes with 42mm and 47mm diameter depending on the size of the dish.
7. How do the holes get into the mounts? Yes exactly, with this machine. Topsignal has more than one of these machines and they are used to punch holes in the mounts.
8. The mounts travel along a long chain through the paint station where they are spray painted by workers and then dried.







9. Topsignal requires an enormous amount of raw materials. Truckloads of tubes are delivered that only a short time later become mounts.

10. The LNB mount is shaped. A waveguide is pulled along and then shaped into the proper form with a press.

11. The LNB mounts also need holes. This takes place here.

12. The required pieces are pressed from an endless roll of sheet metal which will then be converted into the dish mounts.

13. The dish mounts are prepared here. The spacers are formed here and fitted with the necessary holes.

14. Workers hang the antenna mounts for passage through the paint station.

15. Topsignal also has mast mounts. A worker can be seen here punching holes in the mast brackets.

16. Topsignal also manufactures mesh antennas. The panels are stamped here.

17. The assembly pieces for the mesh dishes are prepared here.

18. The LNB mounts for the PFA mesh dishes



19



21



22



19. Peter Lin is the LNB Production Manager. "We operate four production lines and work in eight-hour shifts."

20. A look at LNB production

21. Each LNB is tested for functionality

22. If everything checks out, the LNBs are packed for shipping. As an OEM, Topsignal ships the LNBs in neutral packaging without any brand names.

20





**EMBED SCALABLE
FOOTPRINTS INTO
YOUR WEBSITE**

Satellite charts with filters

View TP's and channels info as you wish

View TP's and channels info as you wish

on my default

☐ Albanian

☐ Arabic

☐ Armenian

☐ Azerbaijani

☐ Belarusian

☐ Bengali

☐ Berber

☐ Bosnian

☐ Bulgarian

☐ Catalan

☐ Chinese

☐ Croatian

☐ Czech

☐ Danish

☐ Dutch

☒ English

☐ Finnish

☐ French

☐ Georgian

☒ German

☐ Greek

☐ Hebrew

☐ Hindi

☐ Hungarian

☐ Indonesian

☐ Italian

☐ Japanese

☐ Korean

☐ Latvian

☐ Lithuanian

☐ Macedonian

☐ Maltese

☐ Norwegian

☐ Polish

☐ Portuguese

☐ Romanian

☐ Russian

☐ Serbian

☐ Slovak

☐ Slovenian

☐ Spanish

☐ Swedish

☐ Tagalog

☐ Thai

☐ Turkish

☐ Ukrainian

☐ Vietnamese

☐ Welsh

☐ Yiddish

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

☐ 4:3

☐ 5:4

☐ 16:10

☐ 16:9

Transponder news updated daily

Get only the updates you need with filtered RSS

WWW.SATBEAMS.COM

Interested to contribute your DX reports?
Send your updates to autoscan@satbeams.com

Breaking NEWS!

LEXIUM FastAlign® 7100Pro

Professional Satellite Meter with AutoFind® & QuickSweep® Technology


AUTOMATICALLY RECOGNIZES AND DISPLAYS SATELLITE NAME, SIGNAL LEVEL, AND QUALITY

AutoFind® Technology

is an automatic satellite recognition technology that recognizes & displays the name of the satellite you are pointing to from the programmed list of satellites in its databank.

QuickSweep® Technology

makes the meter react to & display your signal reception very quickly so that there is no lag time between the time the signal hits your dish to the time that it's displayed on your FastAlign® 7100 satellite meter.

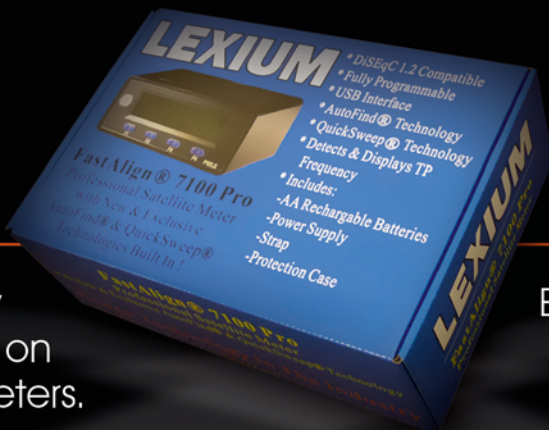

AutoFind® Technology is exclusively available on LEXIUM professional meters.

Exclusive territories available.
No Minimum Order Quantity!

LEXIUM is seeking distributors & dealers world-wide!

LEXIUM
Professional Technology

www.LEXIUM-DVB.com

Email: sales@lexium-dvb.com • Phone: +1-818-485-8350 • Fax: +1-818-485-8354

23



23. The quality control station takes sample LNBs and checks to see that they function correctly.

24. One of the quality checks involves testing the LNBs in a refrigerated environmental chamber. Topsignal has two of these test chambers.

25. If there are defective LNBs, they are checked out here to identify weak spots

26. Workers can be seen here packing completed products for shipment. It's always palette-sized shipments because of the enormous numbers involved

24





OUR FAVORITE BEST DIGITAL TV COMPANIES OF THE WORLD





Azureshine Taiwan

www.azureshine.com.tw

Manufacturer
of Professional Dishes

Turnover
US\$ 5-10mio

Employees
50-100



Read Full Report

COMPANY REPORT | Satellite Dish Manufacturer Azure Shine |

Dishes in Focus Alexander Wiese



Alex Wiese started his satellite dish manufacturing company, Azure Shine, in 1988. He started with a small workshop in his home town. He had previously worked for a dish manufacturer and had gained valuable experience in the manufacturing of satellite antennas. But then, when the demand for satellite dishes began to grow, he decided to start his own company. He started with a small workshop in his home town. He had previously worked for a dish manufacturer and had gained valuable experience in the manufacturing of satellite antennas. But then, when the demand for satellite dishes began to grow, he decided to start his own company.



The pressing machine the press sheet metal for the parabolic in the foreground, to place that in the pressing machine and comes back out as an antenna.



An 800 employee takes measurements on an 800mm dish. 800mm dishes are manufactured complete with DVB and DVB.



The factory floor is clean and well-lit.

www.TELE-satellite.com/07/07/azureshine



Boiingsat China

www.boiingsat.com

LNB Manufacturer

Turnover
US\$ 10-25mio

Employees
100-250



Read Full Report

Boiingsat's Numerous Production Facilities

- Three Production Locations in Zhuhai/China
- Large Sales Expansion in South America
- In the Works: LNB with Two Feed Rings

LNB Manufacturer Boiingsat operates multiple production facilities in Zhuhai, China. It is a city with 1.5 million inhabitants located in western Guangdong Province. Zhuhai is right next to Hong Kong and is a major economic center in the region.

Boiingsat has three production facilities in Zhuhai, China. It is a city with 1.5 million inhabitants located in western Guangdong Province. Zhuhai is right next to Hong Kong and is a major economic center in the region.

Boiingsat has three production facilities in Zhuhai, China. It is a city with 1.5 million inhabitants located in western Guangdong Province. Zhuhai is right next to Hong Kong and is a major economic center in the region.

Boiingsat has three production facilities in Zhuhai, China. It is a city with 1.5 million inhabitants located in western Guangdong Province. Zhuhai is right next to Hong Kong and is a major economic center in the region.



www.TELE-satellite.com/11/05/boiingsat



BSD Brazil

www.portalbsd.com.br

Digital TV Information
Website

Turnover
US\$ 0.5-1mio

Employees
5-10



Read Full Report

COMPANY REPORT | Satellite Information Website BSD, Brazil |

Benni's BSD



- Operates Brazil's largest digital TV website
- Engaged in the further education of digital TV antenna installers
- Planning his own IPTV channel all about digital technology
- Living his dream with his own worldwide radio station

www.TELE-satellite.com/12/01/bsd



Deviser China

www.devisertek.com

Manufacturer of Signal Analyzers and Broadcast Measurement Instruments

Turnover
US\$ 25-30mio

**Employees
250-500**



[Read Full Report](#)

COMPANY REPORT
信安集团 2014 年度经营报告

Signal Analyzer Manufacturer, China |

DEVISER

**New on
the Scene:
DEVISER**

- DEVISER takes up three floors in China's capital city, Beijing, to set up a new and completely new and modern production facility that is under construction early this year.
- Starting off with two satellite signal analyzers
- Over 20 years experience as a signal analyzer manufacturer
- Fabrication soon to be in a new building
- Their own R&D Team with highly qualified engineers
- Operates with all of the corresponding quality standards

DEVISER is a manufacturer and distributor in China, Taiwan, the United States, Germany, Italy, UK, France.

www.TELE-satellite.com/11/07/deviser



Dishpointer UK

www.dishpointer.com

Information Website and Software Programming

Turnover
US\$ 0.5-1mio

Employees 5-10



[Read Full Report](#)

[illegible]

www.TELE-satellite.com/08/03/dishpointer

DVBCN
China

www.dvbcn.com

Digital TV Forum Website and Software Programming

Turnover
US\$ 1-2.5mio

Employees 10-25



Read Full Report



COMPANY REPORT

Digital TV Website DVBCN.com, China

DVBCN
COM

Largest Digital TV Website in China: DVBCN.com

- Known by every digital TV company in China
- Provides all information regarding digital TV
- Expanding in the areas of recruitment and software development
- Focusing in future technologies such as DTT and IPTV
- Working on international expansion

This is the office building.
We have moved our office to the
new building. Please see the
office on the 5th floor.

www.TELE-satellite.com/12/07/dvbcn



**Horizon
UK**

www.horizonhqe.com

Manufacturer of Signal Meters

Turnover
US\$ 2-5mio

Employees 10-50



[Read Full Report](#)



COMPANY REPORT
2015 BUSINESS REVIEW

Messgerätehersteller HORIZON, Großbritannien

HARLOW GROUP

Happy Birthday HORIZON!

„Allen House“ in Harlow, nicht weit vom
Lehrstuhl, ist die Zentrale von HORIZON, dem
ersten, in England gegründeten Kabel-
Herstellerbetrieb, der sich in den letzten England und
Wales 1961 gründete.

- stellt in den ersten 10 Jahren
125.000 Messgeräte her
- expandiert in den High-End Bereich
- bietet mit einem DVB-C Messgerät
das passende Produkt für den
weltweiten Kabelmarkt
- Ausbau der Kooperation
im OEM-Bereich mit starken
Distributionspartnern
- hohes fachliches Knowhow durch die
nahe Universität

100

© 2015

101

www.TELE-satellite.com/11/11/horizon



Jiuzhou China

www.jiuzhou.com.cn

Manufacturer of STB, IPTV, LNB, Fibre Optics

Turnover
US\$250-500mio

Employees
1000-2500



[Read Full Report](#)

COMPANY REPORT | IPTV Box Manufacturer Jiuzhou, China

JIUZHOU

Jiuzhou greatly expands into IPTV Box Production

- IPTV box production may reach 1 million units in 2011
- Jiuzhou starts HbbTV boxes for Europe
- Big retailers about to launch into IPTV box sales
- Jiuzhou to attend all major exhibitions in 2011, 10 in all

Xiang Wei Chairman of the Board and President of the IPTV business development of Jiuzhou and marketing

The Chinese large manufacturer Jiuzhou is very well known by our readers. The company originated in Sichuan and has been in existence since 1958. In 2004 they collapsed their 50th birthday (see 101st-anniversary issue 02/03/2009). In 2006, the company expanded into the IPTV and set-top-box business. At the time, in 2003 Jiuzhou is planning to become the first supplier for the IPTV market with extensive production facilities. Having been in Jiuzhou's Sales Director and reveals to us what Jiuzhou has achieved in 2010.

First, though, Sales Director Xiang Wei took us on a trip into the past: "The first IPTV boxes were manufactured by Jiuzhou in 2007, back then about 20,000 boxes were produced and installed pure IPTV boxes". Production numbers only increased slowly, "in 2010 we produced 65,000 boxes", comments Xiang Wei.

But 2011 looks to be completely different. "We will be manufacturing as much as high as one million." If all depends on the market, but the company is in progress with a variety of retail chains in North America as well as Europe. The reason: these retail chains are in

• Jiuzhou is involved in major retail chains in America's largest cities. The arguments are two differentiating working on one platform, especially that is needed, because of it.

www.TELE-satellite.com/11/03/jiuzhou



**MFC
USA**

www.microwavefilter.com

HF Filter Manufacturer

Turnover
US\$2.5-5mio

Employees 50-100



Read Full Report

[illegible]

www.TELE-satellite.com/09/03/mfc



**Panodic
China**
www.panodic.com

**STB
Manufacturer**

Turnover
US\$ 100-150mio

Employees
1500-2000



Read Full Report

COMPANY REPORT | Receiver Manufacturer Panodic, China |

One of the Top Five: Panodic

- Multiple quality control points before, during and after production
- Concentrating on digital TV products
- Cooperating with many license providers
- Continuous product palette expansion

www.TELE-satellite.com/12/03/panodic



**Prevail
China**
www.prevail-catv.com

**Manufacturer
of Fibre Optics and Headends**

Turnover
US\$ 10-25mio

Employees
250-500



Read Full Report

COMPANY REPORT | Fiber Optic and CATV Manufacturer Prevail, China |

Prevail's Perfect Organization

- Substantially Increased Sales for 2011 Thanks to Rising Exports
- Additional Factory Soon to be in Operation
- Increased Number of Employees
- Four New SMT Machines in Operation
- Very Active R&D Team

The first thing you notice when you visit Prevail is how neat and clean the entire factory is, nothing is out of place. Another small detail are the uniforms that the employees wear. It's not out of the ordinary to see workers in an assembly line wear uniforms, but at Prevail the office workers also wear uniforms. For the visitor it becomes immediately clear that the work here is very disciplined and organized. And of course the products themselves would also be associated with this high standard.

To confirm this we paid a visit to the three manufacturing plants and had a look around. A fourth factory is currently under construction.

Nancy is General Manager Sales & Marketing and provides us with a little history about the company: "Prevail was founded in 2006 by Managing Director Xu Qianhui along with ten other partners." The company is a private family and belongs to manufacturers of the same product group that it did at the beginning. But with growing, CATV components and accessories as well as distributors and suppliers for coastal cable fees, Prevail considered the early days. "In our first year 2007, we had sales of roughly 10 million RMB (1 million Euro) with 1000 employees. 70% were domestic sales and the rest were exports."

For 2010, however, this changed considerably. Nancy reminded us that now only 50% of their products are sold domestically in China, exports have increased massively. To what countries and regions does Prevail export to?

Nancy is Prevail's International Sales Manager and tells us, "Parts of our exports end up in the south Asian region and this includes India, Pakistan, Indonesia, the Philippines, Thailand and Vietnam, 20% land in South America, 20% go to the West and the rest go to the Middle East, North America and Africa."

Nancy is with that sales in South America have picked up quite a bit and that Prevail is shipping more and more products to that region. The cable TV products there are expanding.

www.TELE-satellite.com/11/05/prevail

COMPANY REPORT | Fiber Optic and CATV Manufacturer Prevail, China |

becomes immediately clear that the work here is very disciplined and organized. And of course the products themselves would also be associated with this high standard.

To confirm this we paid a visit to the three manufacturing plants and had a look around. A fourth factory is currently under construction.

Nancy is General Manager Sales & Marketing and provides us with a little history about the company: "Prevail was founded in 2006 by Managing Director Xu Qianhui along with ten other partners." The company is a private family and belongs to manufacturers of the same product group that it did at the beginning. But with growing, CATV components and accessories as well as distributors and suppliers for coastal cable fees, Prevail considered the early days. "In our first year 2007, we had sales of roughly 10 million RMB (1 million Euro) with 1000 employees. 70% were domestic sales and the rest were exports."

For 2010, however, this changed considerably. Nancy reminded us that now only 50% of their products are sold domestically in China, exports have increased massively. To what countries and regions does Prevail export to?

Nancy is Prevail's International Sales Manager and tells us, "Parts of our exports end up in the south Asian region and this includes India, Pakistan, Indonesia, the Philippines, Thailand and Vietnam, 20% land in South America, 20% go to the West and the rest go to the Middle East, North America and Africa."

Nancy is with that sales in South America have picked up quite a bit and that Prevail is shipping more and more products to that region. The cable TV products there are expanding.



**Satbeams
Belgium**
www.satbeams.com

**Satellite Information
Website and Software
Programming**

Turnover
US\$ 0.5-1mio

Employees
2-5



Read Full Report

SOFTWARE REPORT | Satellite Footprints |

Satbeams Die Website für Profinitutzer

Hohes Ziel hat sich Alexander Derjugin gesetzt. Er ist Gründer und Betreiber der Website satbeams.com und will damit vor allem die professionellen Nutzer erreichen. Das ist ein ambitioniertes Ziel und deswegen wollten wir von ihm persönlich wissen, wie er dieses Ziel erreichen will. In Brüssel, wo er zuhause ist, treffen wir Alexander Derjugin.

Zunächst wollen wir wissen, wie es überhaupt zum Thema Satellitenprogrammierung gekommen ist. Er erzählt uns, dass bereits als die IT Manager bei einer großen internationalen Joint Venture Company in Brüssel, im Jahr 2003 wurde die Idee geboren, eine Website zu erstellen, die für die europäischen Länder (Frankreich, Belgien, Deutschland, Italien, Spanien, Portugal, Griechenland, Türkei, etc.) eine zentrale Plattform für die Satellitenprogrammierung sein sollte. Diese Website sollte nicht nur für die Profinitutzer, sondern auch für die Endverbraucher geeignet sein. Alexander Derjugin ist ein sehr aktiver und engagierter Mann, der seine Website satbeams.com als eine der besten Websites für Profinitutzer in der Branche betrachtet.

Wie es Alexander Derjugin gelungen ist, diese Website zu einer der besten Websites für Profinitutzer in der Branche zu machen, erfahren wir im Interview. Er erzählt uns, dass er bereits als IT Manager bei der Joint Venture Company in Brüssel, im Jahr 2003 wurde die Idee geboren, eine Website zu erstellen, die für die europäischen Länder (Frankreich, Belgien, Deutschland, Italien, Spanien, Portugal, Griechenland, Türkei, etc.) eine zentrale Plattform für die Satellitenprogrammierung sein sollte. Diese Website sollte nicht nur für die Profinitutzer, sondern auch für die Endverbraucher geeignet sein. Alexander Derjugin ist ein sehr aktiver und engagierter Mann, der seine Website satbeams.com als eine der besten Websites für Profinitutzer in der Branche betrachtet.

www.TELE-satellite.com/10/11/satbeams

SOFTWARE REPORT | Satellite Footprints |

Hohes Ziel hat sich Alexander Derjugin gesetzt. Er ist Gründer und Betreiber der Website satbeams.com und will damit vor allem die professionellen Nutzer erreichen. Das ist ein ambitioniertes Ziel und deswegen wollten wir von ihm persönlich wissen, wie er dieses Ziel erreichen will. In Brüssel, wo er zuhause ist, treffen wir Alexander Derjugin.

Zunächst wollen wir wissen, wie es überhaupt zum Thema Satellitenprogrammierung gekommen ist. Er erzählt uns, dass bereits als die IT Manager bei einer großen internationalen Joint Venture Company in Brüssel, im Jahr 2003 wurde die Idee geboren, eine Website zu erstellen, die für die europäischen Länder (Frankreich, Belgien, Deutschland, Italien, Spanien, Portugal, Griechenland, Türkei, etc.) eine zentrale Plattform für die Satellitenprogrammierung sein sollte. Diese Website sollte nicht nur für die Profinitutzer, sondern auch für die Endverbraucher geeignet sein. Alexander Derjugin ist ein sehr aktiver und engagierter Mann, der seine Website satbeams.com als eine der besten Websites für Profinitutzer in der Branche betrachtet.

Wie es Alexander Derjugin gelungen ist, diese Website zu einer der besten Websites für Profinitutzer in der Branche zu machen, erfahren wir im Interview. Er erzählt uns, dass er bereits als IT Manager bei der Joint Venture Company in Brüssel, im Jahr 2003 wurde die Idee geboren, eine Website zu erstellen, die für die europäischen Länder (Frankreich, Belgien, Deutschland, Italien, Spanien, Portugal, Griechenland, Türkei, etc.) eine zentrale Plattform für die Satellitenprogrammierung sein sollte. Diese Website sollte nicht nur für die Profinitutzer, sondern auch für die Endverbraucher geeignet sein. Alexander Derjugin ist ein sehr aktiver und engagierter Mann, der seine Website satbeams.com als eine der besten Websites für Profinitutzer in der Branche betrachtet.



SatGuys USA

www.satelliteguys.com

Satellite Information
Website and Forum

Turnover
US\$ 0.5-1mio

Employees
5-10



Read Full Report

COMPANY REPORT | Satellite Forum Operator Scott's SatelliteGuys, USA

Scott's SatelliteGuys

- Provides assistance with technical satellite reception questions
- Founded by Scott as a non-profit forum
- All advertising income is reinvested in better technology
- New is the use of the forums through Customer Service employees of digital TV companies

128 TELE-satellite World 09-10/2012

www.TELE-satellite.com/12/05/satguys



Skyworth China

www.skyworth.com

High Quantity
STB Manufacturer

Turnover
US\$ 200-300mio

Employees
2000-3000



Read Full Report

COMPANY REPORT | Receiver Manufacturer SKYWORTH, China

SKYWORTH is Expanding

One of the larger receiver manufacturers in China is SKYWORTH. They've consistently been in expansion mode and have managed to make a phenomenal entrance into the South American marketplace in 2010: a large contract with the government of Argentina involving 400,000 receivers for the terrestrial ISDB-T standard resulted in SKYWORTH's intense production activity. "All these receivers have already been shipped," we learn from Jack Jiang, Sales Director of SKYWORTH's receiver division. The company's official name is Shenzhen SKYWORTH Digital Technology Co., Ltd.

78 TELE-satellite World 09-10/2012

www.TELE-satellite.com/11/03/skyworth



SmartWi Denmark

www.smartwi.net

Manufacturer
of Wireless Card Reader

Turnover
US\$ 1-2mio

Employees
5-10



Read Full Report

COMPANY REPORT | Wireless Card Reader Producer SmartWi

SmartWi to Conquer Provider Market

Readers of this magazine have been familiar with wireless card reader manufacturer SmartWi for years. In TELE-satellite issue 06-07/2007 we published the first report on this Danish company which has come up with a glorious idea: How about transmitting data from a pay TV provider's subscription card to a second card in the same household? All of a sudden your viewing pleasure can be extended from the living room all the way to the bedroom, den or any other room at your place. Pay TV wherever you like - and a smart idea like that deserves a proper name too: smart Wi, or SmartWi in short.

128 TELE-satellite World 09-10/2012

www.TELE-satellite.com/10/11/smartwi



Sowell China

www.sowell-tech.com

Digital TV STB Manufacturer

Turnover
US\$ 50-100mio

Employees
50-100



Read Full Report

COMPANY REPORT | Receiver Manufacturer Sowell, China

IPTV is Future

- Already operating the first IPTV project
- 3D planned for the future
- Integration of TV reception with IPTV
- 60% of all Sowell receivers are already HD

www.TELE-satellite.com/12/05/sowell



Spaun Germany

www.spaun.com

High Quality
Accessories Manufacturer

Turnover
US\$ 10-25mio

Employees
50-100



Read Full Report

COMPANY REPORT | High Quality Accessory Manufacturer

Spaun at 40 years Moving into the new decade with many new products

Alexander Wieser

Well, actually, the title isn't quite correct: the company Spaun doesn't celebrate its 40th anniversary until 2019. But Spaun is so full of energy and is getting ready to introduce a wide range of new products in their anniversary year that we simply couldn't wait to find out about this company's long history.

At the end of the 1970s, the company Spaun was founded in the town of Singen. At that time, the company was a small family business. But over the years, it grew into a large company with many new products. Today, Spaun is a leading manufacturer of high-quality satellite accessories.

Spaun has a long history of innovation and quality. The company has been producing satellite accessories for over 40 years. Today, Spaun is a leading manufacturer of high-quality satellite accessories. The company has a long history of innovation and quality. The company has been producing satellite accessories for over 40 years. Today, Spaun is a leading manufacturer of high-quality satellite accessories.

www.TELE-satellite.com/08/03/spaun



Spaun Power Germany

www.spaun.com

Manufacturer
of Power Supplies

Turnover
US\$ 2.5-5mio

Employees
25-50



Read Full Report

COMPANY REPORT | Power Supply Unit Manufacturer

Power Supply Units Made by SPAUN – guaranteed!

Every multi-switch and every amplifier comes with one, and of course every receiver has one, too: a power supply unit which is required to connect the device to the mains. It has become such an everyday component of virtually any electronic device that we have stopped thinking about how it actually works. SPAUN, on the other hand, has given it a great deal of thought and has arrived at a remarkable conclusion. Since Spaun is the managing director of SPAUN, one of the most renowned quality manufacturers of multi-switches and other accessories for satellite signal distribution. He tells us what it's all about.

Power supply units are a critical component of any electronic system. SPAUN has been manufacturing high-quality power supply units for over 40 years. Today, SPAUN is a leading manufacturer of high-quality power supply units. The company has a long history of innovation and quality. The company has been producing power supply units for over 40 years. Today, SPAUN is a leading manufacturer of high-quality power supply units.

www.TELE-satellite.com/10/11/spaun

Trimax China

www.trimaxtec.net

DVB Products
Manufacturer

Turnover
US\$ 2.5-5mio

Employees
5-10



Read Full Report



www.TELE-satellite.com/12/03/trimax



TSReader USA

www.coolstf.com

Analyzer Software
and Programming

Turnover
US\$ 0.5-1mio

Employees
1-5



Read Full Report



www.TELE-satellite.com/12/07/tsreader



WSInternational USA

www.wsidigital.com


Manufacturer
of STB and Meters

Turnover
US\$ 1-2mio

Employees
5-10



Read Full Report

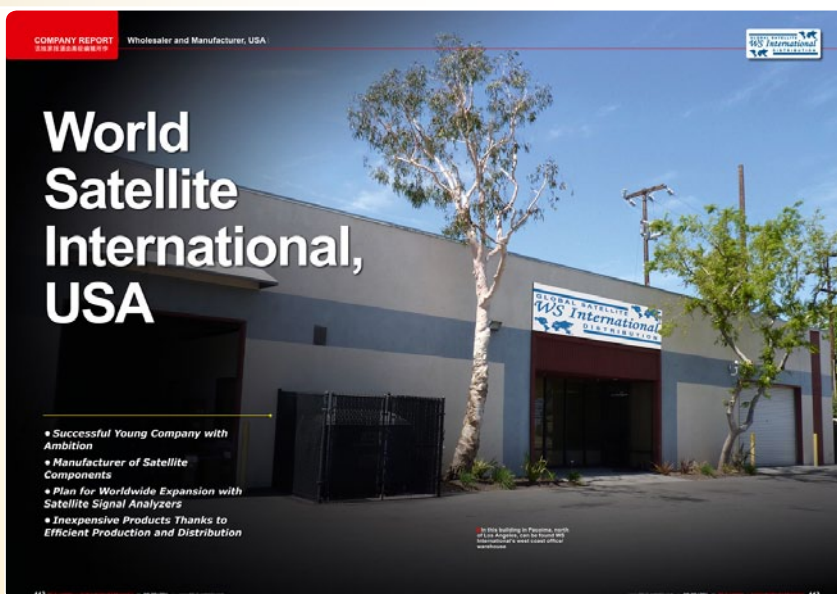

www.TELE-satellite.com/11/09/wsinternational

Transponder Streams

for testing STB and headends

ATSC

DTMB

DVB-C

DVB-S

DVB-S2

DVB-T

DVB-T2

ISDB-TB

Off-Air Streams From All Major Digital TV Standards Around the World.

Ideal for Remote Testing of STB and Headends.

Available in lengths of 30 seconds and 5 minutes on USB memory sticks or by FTP download.
File format: .ts

Streams available:

ATSC	with HDTV (USA)
ATSC	with 1 Single Channel (USA)
ATSC	with 2 Audio PIDs for 1 Video (USA)
ATSC	with High Null Packets (USA)
ATSC	with Wrong TS ID (USA)
ATSC	Fully Packed (USA)
ATSC	Channel Name Missing (USA)
ATSC	Identical Channel Names (USA)
ATSC	Mechanical Channel Names (USA)
DTMB	with HDTV (China)
DTMB	with false video descriptor (China)
DTMB	with MHEG (Hongkong)
DVB-C	in Nagravision 3 (Portugal)
DVB-S	with 3D (ASTRA)
DVB-S	with MPEG2 and H.264 mix (PALAPA)
DVB-S	in MIS (ATLTANIC BIRD)
DVB-S2	with HDTV (HOTBIRD)
DVB-S2	with MPEG 4:2:2 (EUROBIRD)
DVB-S2	with 3D (TURKSAT)
DVB-S2	with HDTV (AMAZONAS)
DVB-S2	with 3D (THOR)
DVB-S2	with 1Seg mobile TV (AMC 6)
DVB-T	with radio (Netherlands)
DVB-T	with MHEG (UK)
DVB-T	as retransmission off satellite (Qatar)
DVB-T2	with HDTV (Germany, UK)
ISDB-T	with 1Seg mobile TV and HD (Brazil)

and many more according to standard

www.transponderstream.com

The ,Antenna Whisperer‘



- *Went from hobbyist to successful specialist*
- *Able to precisely align the largest of dishes*
- *Focuses on elaborate installations with good quality material*
- *Demonstrates that specialization can bring success*



Nivaldo da Silva Knows How to Align Large Antennas



■ 'Antenna Whisperer' Nivaldo da Silva in front of his TV Século 21 satellite antenna installations in Valinhos, Sao Paulo Province, Brazil

Antiference is a leading manufacturer in the antenna & satellite industry and we are proud to be celebrating 75 years of manufacturing UHF & VHF antennas this year. The Antiference product portfolio has been evolving and expanding to meet the needs of the ever moving market place.

Now as we enter the 'digital age', Antiference is pioneering new products and technologies, including our range of HDMI distribution systems.

HDMI DISTRIBUTION SYSTEMS



HDMI MATRIX SWITCHES



**HDMI OVER CAT5/6
REPEATERS & EXTENDERS**



**HDMI SPLITTERS
SINGLE AND MULTI-INPUT**

 We are looking for distributors across Europe, to work with our European Sales Office. Please contact:

 Buscamos distribuidores en todo Europa, para trabajar con nuestra Oficina de Ventas Europeo. Favor de contactar:

 Nous cherchons des distributeurs en Europe, pour travailler avec notre Bureau de Vente Européenne. Voulez contacter:

 Wir suchen Distributoren in Europa, die Interesse haben mit unserem europäischen Verkaufsbüro zu arbeiten. Bitte kontaktieren Sie:



Arnold Boeijen Tel: 00 32 484 233549 or e-mail: arnold@antiference.co.uk

For more information on the entire Antiference range of products go to www.antiference.co.uk or scan the QR code

SPAROS SAT HD


www.spaun.com Quality made in Germany

SATELLITE TV METER

SPAROS SAT HD*

- High quality and bright display (4.3 inch)
- MPEG4-display and measuring
- SCR single cable switching commands
- DiSEqC 1.x and SCR EN 50494 control
- Spectrum analysis
- Robust, impact-resistant housing
- Splash-resistant keypad

* also available as Combo Analyzer
SPAROS SAT HD DVB-C
SPAROS SAT HD DVB-T



NEW

SPAUN electronic GmbH & Co. KG · Byk-Gulden-Str. 22 · 78224 Singen
Tel.: +49 (0)7731-8673-0 · Fax: +49 (0)7731-8673-17
Email: contact@spaun.com · www.spaun.com

■ The broadcasting antenna and the large 6.0 meter satellite dish for the TV Século 21 station. If you look closely, you'll see a 1.2-meter offset dish mounted by Nivaldo da Silva up on the mast in an inverted position.



Anyone who has any experience setting up and aligning satellite antennas knows only too well the difference between small dishes and larger dishes: the smaller the antenna, the easier it is to align it to the desired satellite; on the other side of the coin, the larger the dish, the more difficult it is to bring it into focus on the right satellite.

Some installers have a certain way of performing these alignments and one of them is Nivaldo da Silva from Sao Paulo, Brazil. He has the ability to perfectly align the largest of antennas and seems to be able to talk to the dishes. They call him the 'Antenna Whisperer'.




Microwave Filter Company, Inc.

Satcom Filters & Components



**Downlink &
Uplink Filters
in the C, X, Ku,
K and Ka bands
for commercial
& military use**

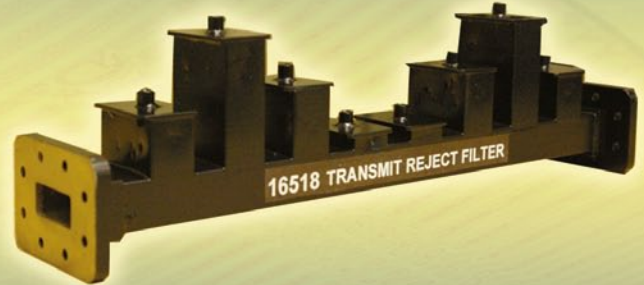

E-Mail: mfcsales@microwavefilter.com

Tel: (315) 438-4700

Fax: (315) 463-1467

6743 Kinne Street, East Syracuse, NY (USA) 13057

RoHS Compliant



An ISO 9001:2008 Registered Company

www.microwavefilter.com



**Your Partner of OEM/ODM
Communication Solution.**



No. 206 Cheng-Kung 3 Rd., Nan Kang Industrial Park Nantou, Taiwan

Tel : 886-49-2260666 Fax : 886-49-2260675

E-mail : saccount@jonsa.com.tw





He's been installing antennas for 40 years. "I erected my first antennas back in 1966", he says remembering the start of it all. When the first satellite signals began streaming down into Brazil, Nivaldo da Silva became instantly excited about this new technology. "There was hardly any literature on the subject. Back then we had to work out everything ourselves - we even built the parabolic dishes ourselves."

The first attempt was not very successful: "We simply couldn't find the satellite signal." Eventually they did succeed when they acquired a used satellite dish and successfully installed it.

Now there was nothing to hold him back and Nivaldo da Silva installed one system after the another. He be-



gan purchasing the necessary materials in combination with others. Nivaldo da Silva is very concerned about the quality of the materials he uses for his own installations: "It always pays to use quality materials in the long run." In 1977 he started his own installation company.

It didn't take long for the professional users of satellite signals to discover him. "Rede Globo de Televisao was my first professional customer; I installed satellite systems for the broadcaster's advertising customers." Later on he acquired contracts with other broadcasters like TV Campinas, an affiliate of TV Bandeirantes, for SBT, TV Cultura and the religious channel TV Século 21.

This broadcaster is located in the small city of Valinhos, south of Campi-

nas in the Sao Paulo province in southeastern Brazil.

José Maria Albiero is TV Século 21's TV Director. He willingly showed us the antenna installation that 'Antenna Whisperer' Nivaldo erected at his station. "We've been operating a TV production facility here since 1994 and since 1998 we've been transmitting our program on channel 53." And since 2000 TV Século 21 has been occupying an 18 MHz half-transponder on the STARONE C2 satellite at 70W. "We use a 6.0-meter antenna to uplink our program to that satellite. This dish was erected by Nivaldo."

Nivaldo lists for us: "For TV Século 21 I installed a total of five dish antennas - three that are 3.2 meters in diameter, a 2.6-meter dish and a 4.5-meter


antenna." One of the 3.2-meter dishes was fitted with a motor by Nivaldo, the others are all fixed in place.

'Antenna Whisperer' Nivaldo da Silva can be proud of what he's achieved. He took his personal interest in satellite technology and successfully turned it into a flourishing business. His focus on careful and precise installations has resulted in him becoming one of the most sought after large antenna specialists in his region.

1. José Maria Albiero is TV Século 21's TV Director and is seen here showing us the satellite signal reception components
2. A look in the TV Século 21 broadcasting control room. Programming is transmitted locally via UHF channel 53 but can also be received through the Internet at www.tvseculo21.org.br



BEST SATELLITE UPLINK EARTH STATIONS IN THE WORLD

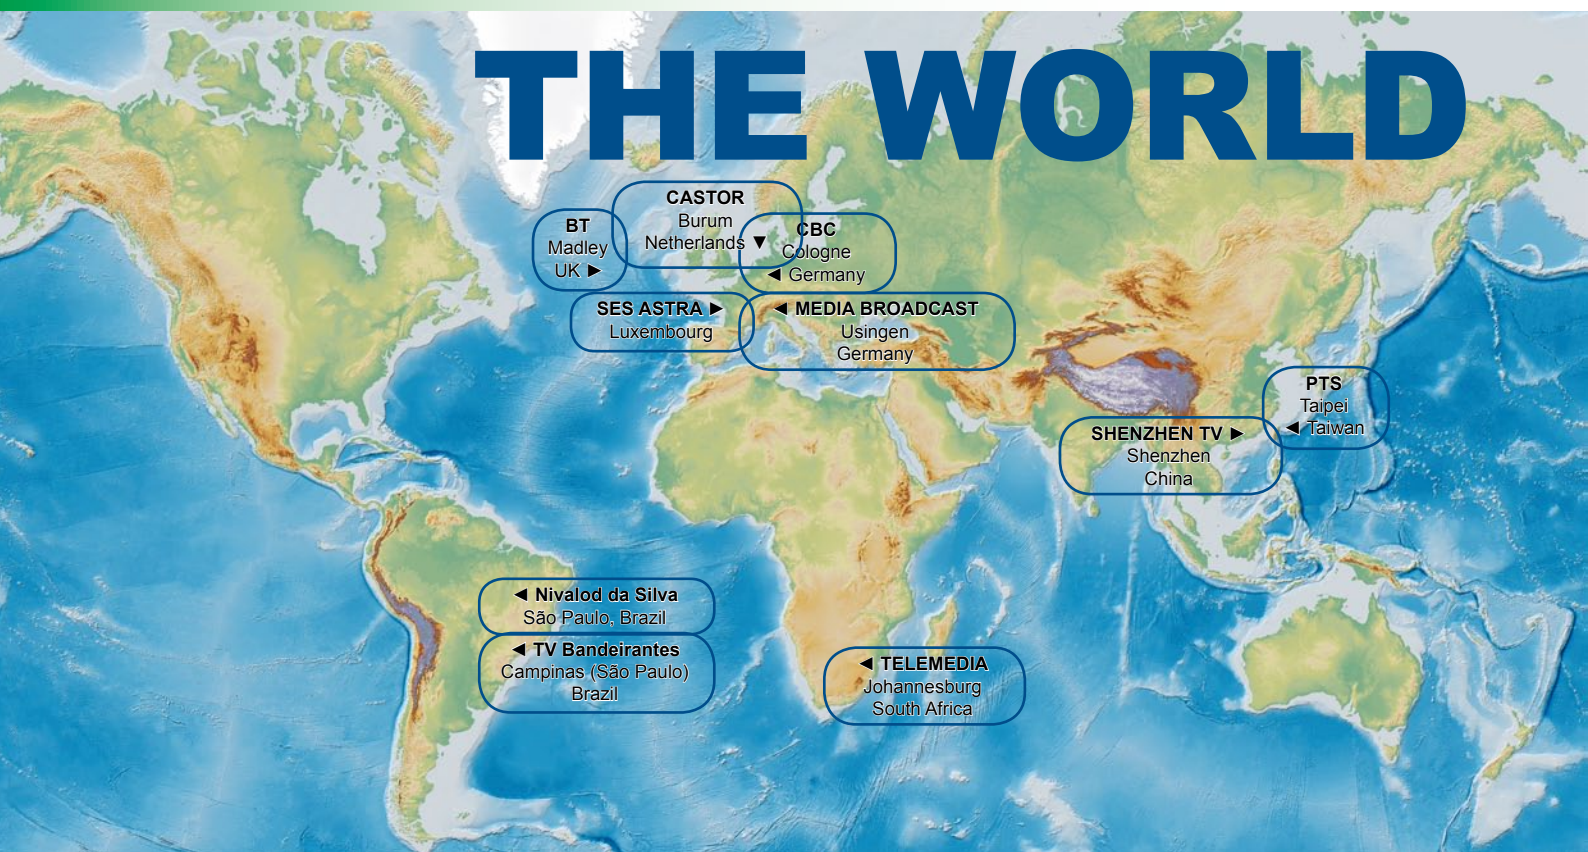

Nivaldo da Silva São Paulo Brazil

Read Full Report



www.TELE-satellite.com/12/09/nivaldodasilva

COMPANY REPORT Satellite Installer Nivaldo da Silva, São Paulo, Brazil

The 'Antenna Whisperer'

- Went from hobbyist to successful specialist
- Able to precisely align the largest of dishes
- Focuses on elaborate installations with good quality material
- Demonstrates that specialization can bring success

TV Bandeirantes São Paulo Brazil

Read Full Report



www.TELE-satellite.com/12/07/tvbandeirantes

COMPANY REPORT TV Station TV Bandeirantes, Campinas, SP, Brazil

Satellite Dishes at TV Bandeirantes

- The most modern reception and transmission technology in Brazil
- Receives and transmits in HD
- Receives the main program via satellite
- A specialty is the combination of analog and digital channels

Shenzhen TV Shenzhen China

Read Full Report



www.TELE-satellite.com/12/05/shenzhen-tv

COMPANY REPORT Ground Station Shenzhen TV, China

Satellite Uplink directly from Shenzhen

- uses 6 Uplink dishes for SNG
- will start its own programming Uplink soon
- prepared for further expansion
- all important devices installed two times for instant backup

Castor Burum Netherlands

Read Full Report



www.TELE-satellite.com/12/03/castor

COMPANY REPORT Satellite Uplink Station, Netherlands

CASTOR: More than an Uplink Station

- Internet and TV uplink for cruise ships
- Data services for specific user groups
- Uplink for many Dutch radio channels
- Downlink/encoding for IPTV providers
- Free capacity for additional uplink customers

CBC Cologne Germany

Read Full Report



www.TELE-satellite.com/12/01/cbc

COMPANY REPORT Uplink Provider

Zero Tape – Full HD

- all programming content stored as files
- huge file-based electronic archive
- global content distribution
- production and international playout of live coverage of German Bundesliga soccer matches
- fully equipped for HDTV

BT Madley UK

Read Full Report



www.TELE-satellite.com/11/11/bt

COMPANY REPORT BT Madley International Communications Centre, UK

Partner for the Big Players

- Operates 65 dishes in southwestern Great Britain
- Recently began offering uplink services for programming providers
- Equipped for HD and 3D program processing
- International optical links in all directions
- Highly motivated technical specialists

CASTOR BROADCASTING



CASTOR Uplinks

Castor is a leading Dutch provider of Teleport, VSAT & Broadcasting services to Wholesale, Media, Government and Business customers

Special Offer for Occasional Use capacity on AM-44

Contact: www.castor.nl/contact

SES ASTRA Luxembourg

Read Full Report



www.TELE-satellite.com/11/09/ses

COMPANY REPORT

Satellite Provider

SES ASTRA

Spreading its Wings

- 34 million euro invested
- SES with shareholding in world-wide Internet-via-satellite MEO system
- 44 satellites around the world
- extremely low error tolerance makes for equally low failure rate
- remote monitoring of all SES ASTRA satellites via company-run reception stations

Media Broadcast Usingen Germany

Read Full Report



www.TELE-satellite.com/10/09/mediabroadcast

STATION REPORT

Earth Station Usingen, Germany

Satellite Reception with a 19 Metre Dish

30 Years of Satellite Reception and Uplink in Usingen near Frankfurt

In an age of ever decreasing antenna sizes and only very few satellite DIXers using large dishes it's a welcome change to explore really huge antennas close-up. These can only be found in professional settings, of course, and in particular where TV channels are beamed up to a satellite: at satellite earth stations. One of Europe's top 5 stations is located close to the small town of Usingen, not far from Frankfurt in Germany.

Telemedia Johannesburg South Africa

Read Full Report



www.TELE-satellite.com/07/09/telemedia

Company Report

TV Uplink

Telemedia, Johannesburg

With *Optiflex* for the future – that is Peter Bräunlich's motto. He operates an uplink station in Johannesburg, South Africa under not exactly ideal conditions. Peter originally came from Great Britain where he worked for many years for the BBC. In 1979 he made the move to this region, almost 5 years before South Africa TV started broadcasting. In 1980 he became self-employed. His starting capital was his garage, his spectrum analyzer and his four-wheel-drive SUV. His first contract was to erect TV antennas on the diamond mines of Botswana, followed by several contracts for the establishment of the new Broadcasting Television. He was successful and started his own company. This made in 1981. In 1987 he moved into a new building in Klerks, a suburb of Johannesburg in the north, where he can still be found today. With only four employees back then, he handled the microwave links for the channels groups for the then MNET and SABC.

In 1994 it was busy time. South Africa Television placed an order for the first satellite uplink. Peter responded to it, "we were using a British TUBS antenna and mounted it on an old optical instrument. It was an optical instrument, he recalled the first satellite uplink. "It was the first time I did it for me." Over the course of the next year things began to pick up. His employee count climbed to 20 and there were more and more uplinks, occasional feeds and SBC transmissions. "The SBC has transmitted all of Africa and the world's media in 1997, compared to Peter as he remembers his previous work. Today Peter made employee more than 35 people of

BT ready to take off

We are back providing broadcast uplinks

Satellite Program Providers can take advantage of BT's superior technical quality at our South-West England's Satellite Uplink Station:

- fiber connected to all parts of the world
- direct access to more than half of all satellites worldwide
- perfectly equipped for HDTV
- ready for 3DTV



China TV for the USA



- ***Produces a number of Chinese-language TV channels for the USA***
- ***Utilizes original material from China***
- ***Semi-live TV news broadcast from China***
- ***Already active in IPTV***
- ***Transmits in the clear via ATSC stations***

■ On the first floor of this office building in El Monte, east of Los Angeles, you'll find ICN's headquarters. ICN stands for "Information, Culture, News" and perfectly describes the content of ICN's produced TV programs. About 35 employees work here with another 30 employees located in those cities with ICN TV stations.

ICN supplies Chinese Americans with TV from Home

In most countries the terrestrial TV frequencies are reserved for those channels that broadcast in that country's language. In a melting pot country like the USA, there are so many languages spoken by immigrants from every corner of the world and this is reflected by the terrestrially broadcast TV channels. There are freely receiv-

able TV channels in every conceivable language including Chinese.

One of the larger providers of Chinese-language TV in the USA is the company ICN (www.icntv.net or www.iavcusa.com) whose headquarters

■ Neil Nieh is Vice President and Director of ICN. He is responsible for the technical side of the operation and is standing here in the studio ICN uses for their locally produced news broadcasts.





ICN/國際衛視 覆蓋範圍

Information Culture News/ International Audio-Visual Communication Inc.

can be found in Los Angeles, California. There you'll find two digital ICN TV channels receivable terrestrially in ATSC, one of them in Chinese and the other in English with a focus on Asia as well as China.

We wanted to know more about this: where does ICN get its programming content from and how is all of this financed?

The right person to talk to about this is Neil Nieh. He is ICN's Vice President

and Director and is primarily responsible for the technical side of the business. He explains to us how ICN got its start: "In 1982 the government in Taiwan decided to address the interests of the out-of-country Chinese in the USA by making available video cassettes of movies and TV series from Taiwan."

■ Broadcasting network for ICN in the USA. From the headquarters in Los Angeles, the programming is distributed to various cities in the USA via fiber optic link and then transmitted terrestrially in ATSC in these cities.

In just a few years a network of 400



distribution stations all across the USA had been built up through which these video cassettes could be rented. In 1998 a satellite channel was even leased and was used to broadcast three Chinese-language channels in Viaccess.

But then in 2004 the elections in Taiwan resulted in a new government. The new government decided to send over to the USA a new leadership for ICN. Inexperienced and naïve, these new bosses ran the company into the ground in just a few months.

Neil Nieh, who had been working for ICN already since 1990, and a coworker in administration, Amanda Lee, recognized ICN's potential and offered to take over the nearly collapsed company in a management buyout. "I took over 60% and my partner Amanda Lee took over the remaining 40%", explains Neil Nieh to us.

Amanda Lee as the CEO runs the company's daily operations while Neil Nieh is the Technical Director for Programming Development. The owner-





九故意的？

CTV AMERICA

www.TELE-satellite.com — 09-10/2012 — TELE-satellite International — 全球发行量最大的数字电视杂志 **247**

■ A look in ICN's Network Operations Center control room in Los Angeles. Some programs such as news presentations are broadcast on a two-hour delay. Other programs are first recorded and then rebroadcast individually.

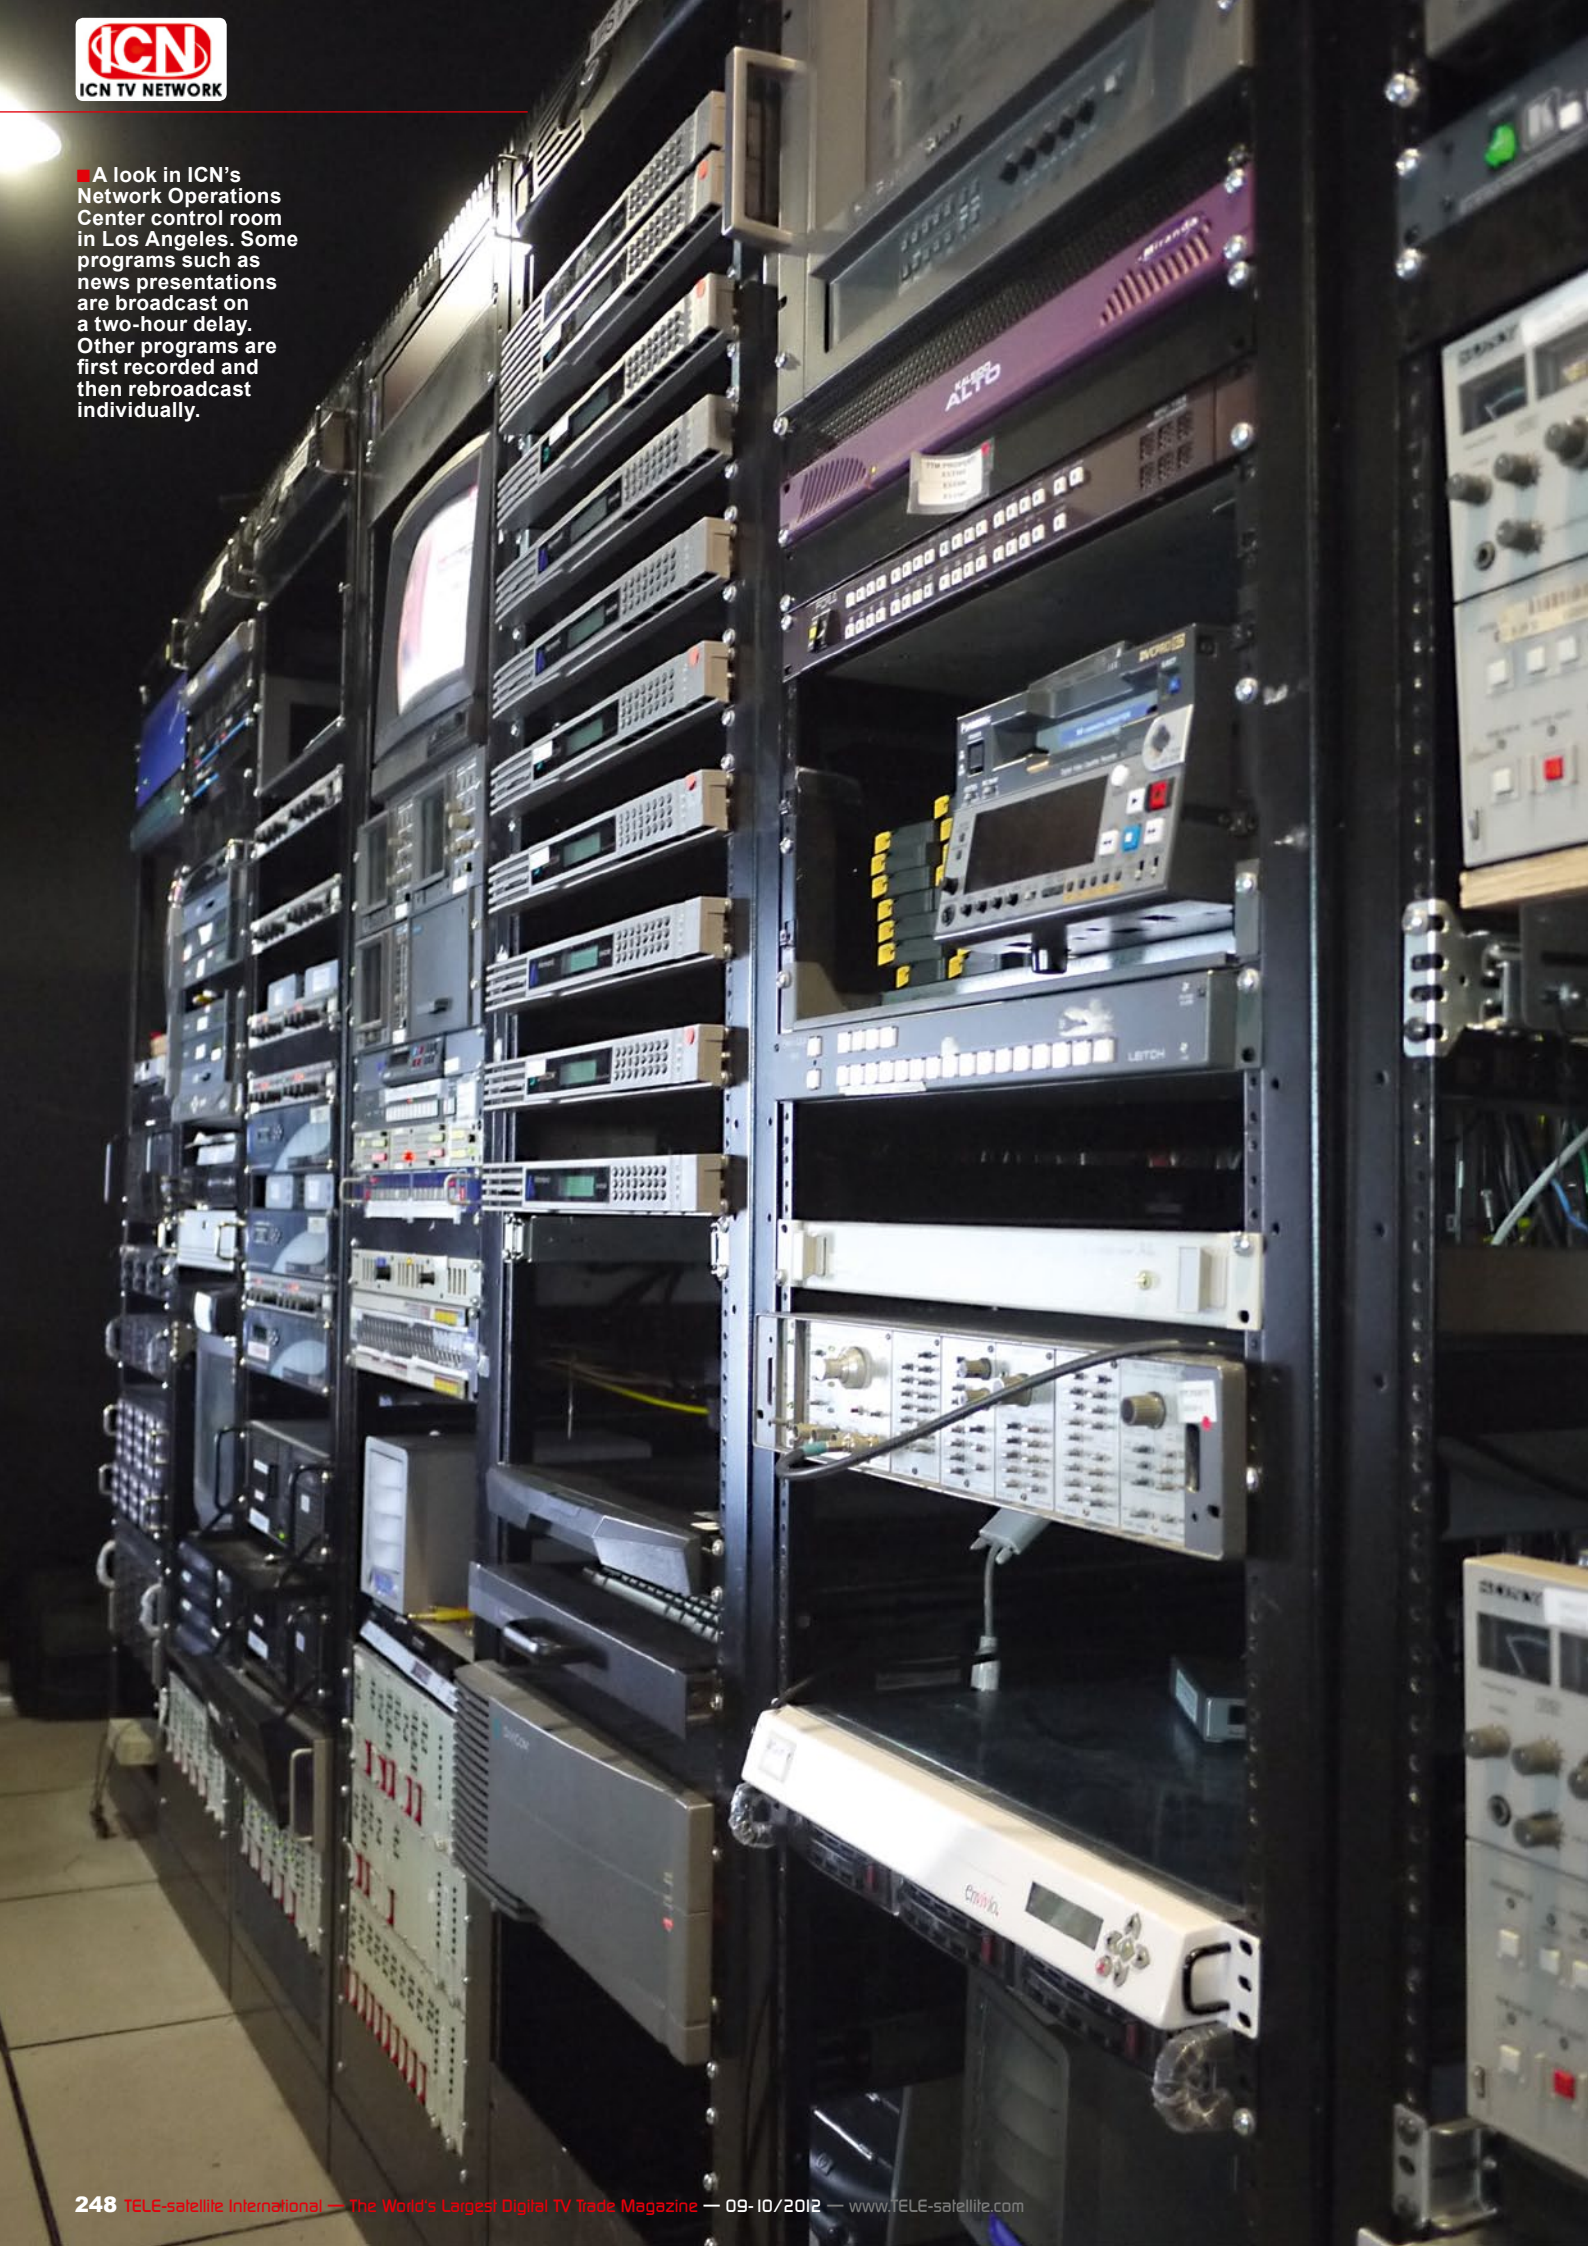

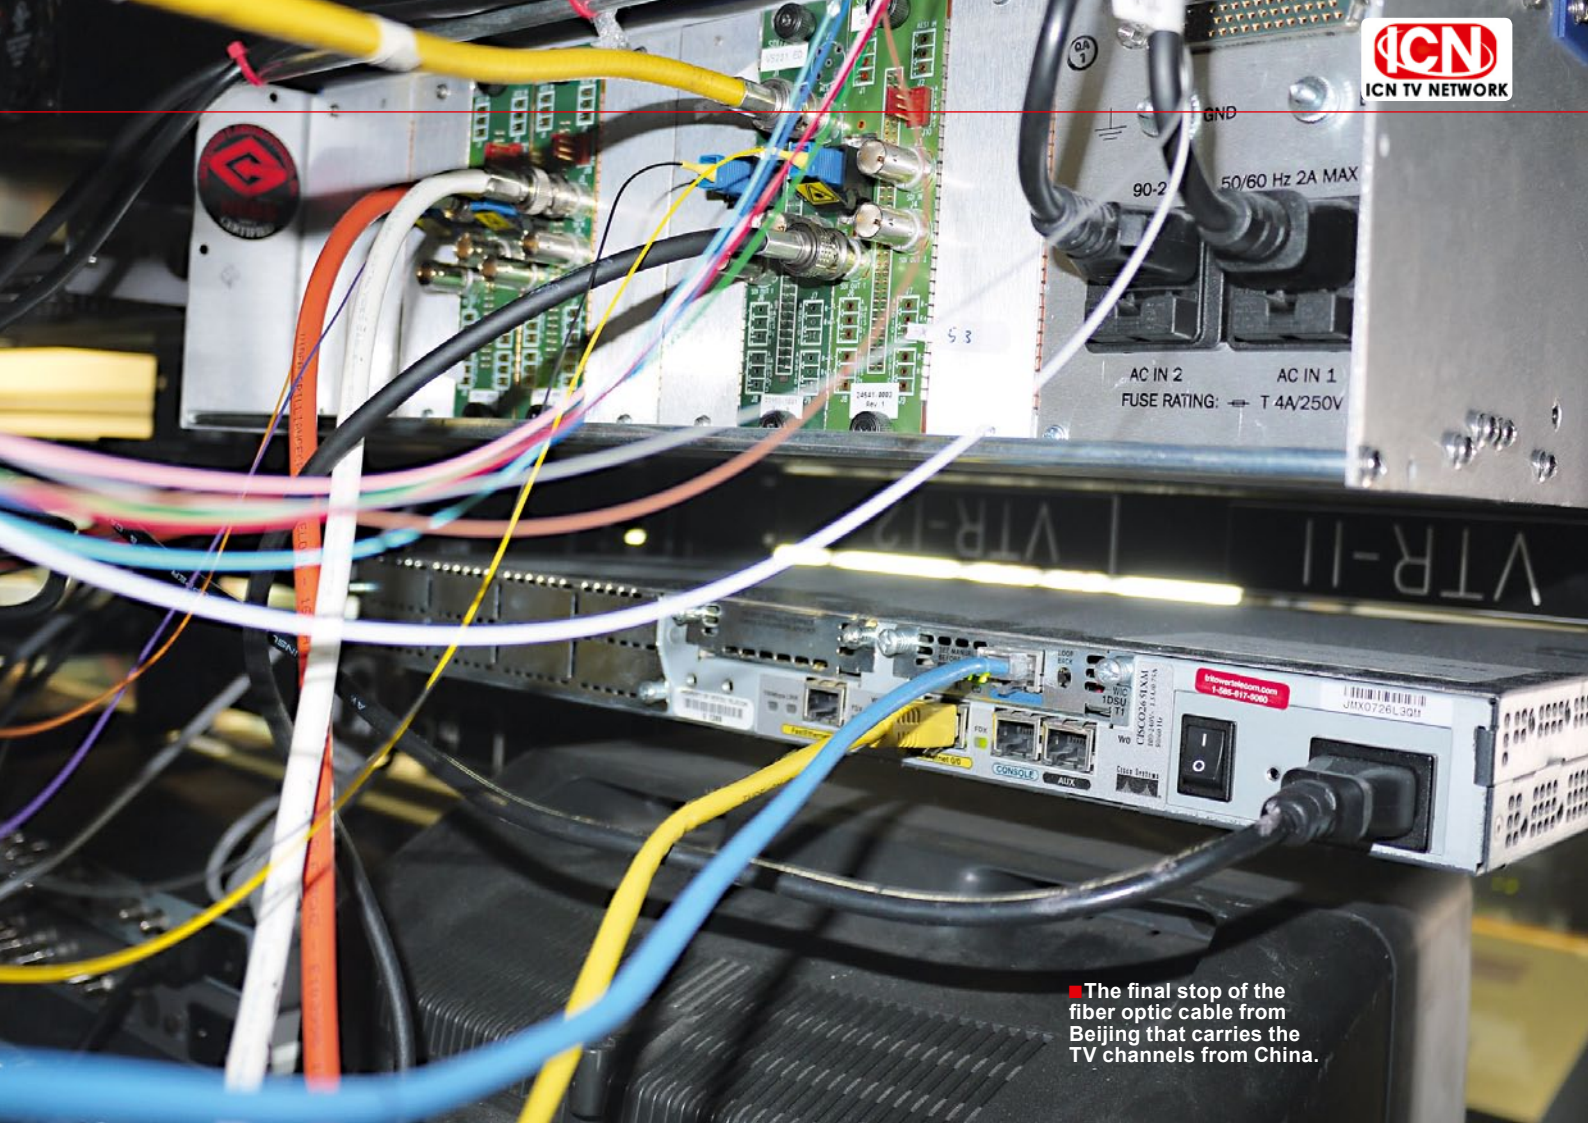

■ The final stop of the fiber optic cable from Beijing that carries the TV channels from China.

ship changed once again in 2009 when the company "Beauty Media" acquired an 85% stake in ICN.

Neil Nieh explains to us how ICN functions technically: "We receive about nine channels from state-run CCTV and an additional 16 Chinese provincial TV channels (the number of channels changes from time to time) directly out of China from the programming provider "Great Wall" (a state-run company) via a trans-pacific fiber-optic cable." From all of this ICN selects the programming compatible for viewers in the USA. "CCTV's news programs we carry, for example, with a two-hour delay while popular TV series are delayed by four weeks or three months." ICN also offers video-on-demand services so that viewers can see their favorite series sooner for a fee.

ICN doesn't rebroadcast the original Chinese TV channels; instead they create their own programming using the programs from the Chinese broadcasters. "We have a license from the American FCC (Federal Communications Commission) to operate as full broadcaster and that means we have to include local content in our programming." And that's the reason why ICN operates their own studio. They use it

to produce cooking shows, kids programs and local news broadcasts. ICN can be viewed not only in Los Angeles via terrestrial ATSC broadcasters, but can also be seen in San Francisco, Houston, New York and Seattle. These other stations also have to follow the same FCC rules regarding local content. "We have our own TV studio in each of these cities so that we can produce local programming. The locally produced programs are then transferred to our network control center here in Los Angeles where we put everything together."

Neil Nieh gives us an idea on viewer potential: "Officially there are around one million Chinese people living in the Los Angeles area but we estimate that unofficially it's more like two million." This potential is about the same in the other cities. "Only in New York do we broadcast our two channels in English with Chinese subtitles because of the many second and third generation Chinese that live there." ICN is planning additional TV stations in Chicago, Atlanta and Boston. ICN is taking small steps in expanding its network across the entire USA.

But ICN doesn't only broadcast their programming for free via terrestrial TV

stations in ATSC, they are also available via cable networks in these cities. "Not only that, we also have capacity with satellite provider DishNetwork and our programming can also be viewed through the three large IPTV providers: KyLinTV (www.kylintv.com), iTV (www.itv.cn) and iTalkTV (www.italkbb.com)."

How does ICN finance all of this? Neil Nieh explains: "40% of our income comes from advertisements, 30% from subscription fees and the remaining 30% from our Home Shopping activities and other events." How does the future look to him? "A real problem for us are the advertising agencies that are consistently under more and more pressure by their own customers to invest in Internet advertising. We have to revamp our advertising in such a way that they can satisfy the requirements of the ad agencies." Neil Nieh makes it clear: "a simple website for our TV channels is not what is in demand." That's why Neil Nieh is working on OTT concepts and interactive services. One thing is clear: ICN has to change since not only are the requirements of the viewers changing, the advertising customers are also adjusting to this change and expect new offerings. And just like every other programming provider, ICN is constantly adjusting itself.

Oscar's Satellite Station

- *Receives the entire world with his seven Ku-band dishes and one C-band antenna*
- *As a former uplink station employee, he knows his way around satellite TV*
- *His dishes are his mascots*
- *Always comes home from trips with satellite components*



■ Satellite DXer Oscar Campos on his covered terrace at his home in Santiago de Chile. From here he enjoys watching satellite TV channels from all over the world.





■ Oscar Campos mounted six 70cm dishes in a row: three of them were installed normally while the other three were installed in the inverted position. In the middle is a Helix antenna for the reception of the NOAA weather satellites.

From long-distance radio listener to long-distance TV viewer



Satellite reception is nothing new for Oscar Campos, he worked for many years at an earth station. His employer was the Chilean Telecommunications company ENTEL and he worked at the Longovilo teleport southwest of the Chilean capital of Santiago as an electrical engineer. That's already nine years ago but since then he's managed to construct his own satellite reception system at his home.

"The dishes are here on my terrace", he explains to us. He refers to them as his mascots. "I don't have a cat or a dog; I have my dish antennas to take care of", he says smiling.

He has an array of 70cm dishes: "Here on the left side is the dish aligned to TELSATR 12 at 15W; the antenna on the right side is pointed to SATMEX 6 at 113W", he points out. He uses a DiSEqC multiswitch to switch between the antennas and two FTA receivers. "This setup lets me receive channels from all over the world including channels in Chinese, Russian, Arabic as well as many European channels and, of course, channels from Brazil, Argentina and Chile."

When he looks for new channels he makes use of a motorized test antenna that he has mounted on a pedestal. "I mounted this 90cm antenna in the in-

verted position so that I could also receive satellites at very low elevations."

For the C-band Oscar Campos uses a 1.8-meter dish on which he mounted expansion panels to convert it into a 2.4-meter antenna. "I use it to receive the analog channels from Brazil but this won't last too much longer; at some point the analog channels will be turned off." In return though he also receives the very new 3D and HD channels in DVB-S2.

An interesting feature in his antenna park is a helix antenna. "It's a QFH Quadri Filar Helix antenna that I use to receive APT signals in the 137 MHz

range. It has to do with the NOAA polar satellites that transmit weather images that are freely receivable." With this antenna he can always check live what the weather is like at that particular moment. "It's also FTA even though there's no TV or radio; but very few people know about this free service."

He is always busy modifying his antenna system and installing new dishes. "Whenever I travel out of the country

I always bring something back for my reception system; it could be a multi-switch, an LNB or a new receiver." The channels that he enjoys the most are the Russian channels CTC on TELSTAR 12 and Russia Today on INTELSAT 9. There's a reason for this: "When I was younger I heard Radio Moscow for the first time on my father's shortwave radio. I was fascinated by that and wondered how people lived on the other side of the world. Today, thanks to sat-

ellites, I can watch TV from these countries!" He also likes to watch the news channels on CCTV from China as well as NHK from Japan. He finds particularly interesting the channels Rede TV and TV Scola from Brazil on STARONE C2.

Oscar Campos is the master of his own satellite station with which he watches channels from all over the world in the best quality right in his home in Santiago.



■ The large 2.4-meter antenna he uses for analog signal reception.

LTE Stop Band Filter

SMF 790

- Safely blocks interference from LTE networks
- Very easy to install
- Performance better than its specifications
- Small product but very effective
- Pass band: 5-790 MHz
- Pass Band Attenuation: 1 dB typ.
- Stop Band: 822-1000 MHz
- Stop Band Attenuation: 50 dB typ.



NEW

SPAUN electronic GmbH & Co. KG · Byk-Gulden-Str. 22 · 78224 Singen
Tel.: +49 (0) 7731-8673-0 · Fax: +49 (0) 7731-8673-17
Email: contact@spaun.com · www.spaun.com

SatelliteGuys.US

America's Satellite Information Source

Proudly Presents:

SATMAPS!

Where does the satellite signal go?
Find out at SATMAPS!

Real Satellite Beam Data for
North America direct from the FCC!


Find SATMAPS online at:
<http://satmaps.satelliteguys.us>

SatelliteGuys.US

FCC Satellite Maps - Chrome, Firefox or Safari required to view and sort Spreadsheet. IE requires adding "https://www.google.com" to IE Trusted Sites.

EchoStar 7 119W S13 New Haven

Embedded KML Viewer

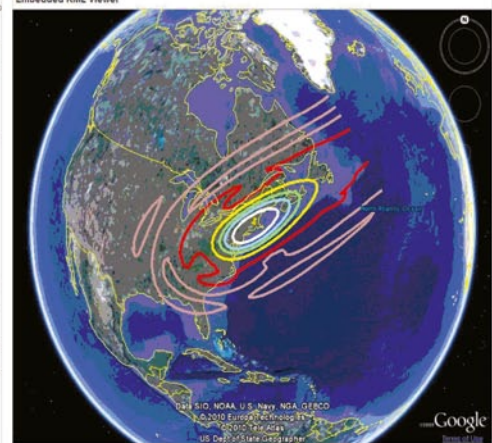

SatelliteGuys.US hosts America's Largest & Most Popular Satellite Discussion Forum
We are America's Satellite Information Source!

SatelliteGuys.US is made possible by the PROUD support of the following Gold Sponsors:



<http://www.SatelliteGuys.US>




1

1. Oscar Campos' test system that he uses to find new satellites and new channels

2. This is how Oscar Campos receives weather information from the NOAA satellites

2

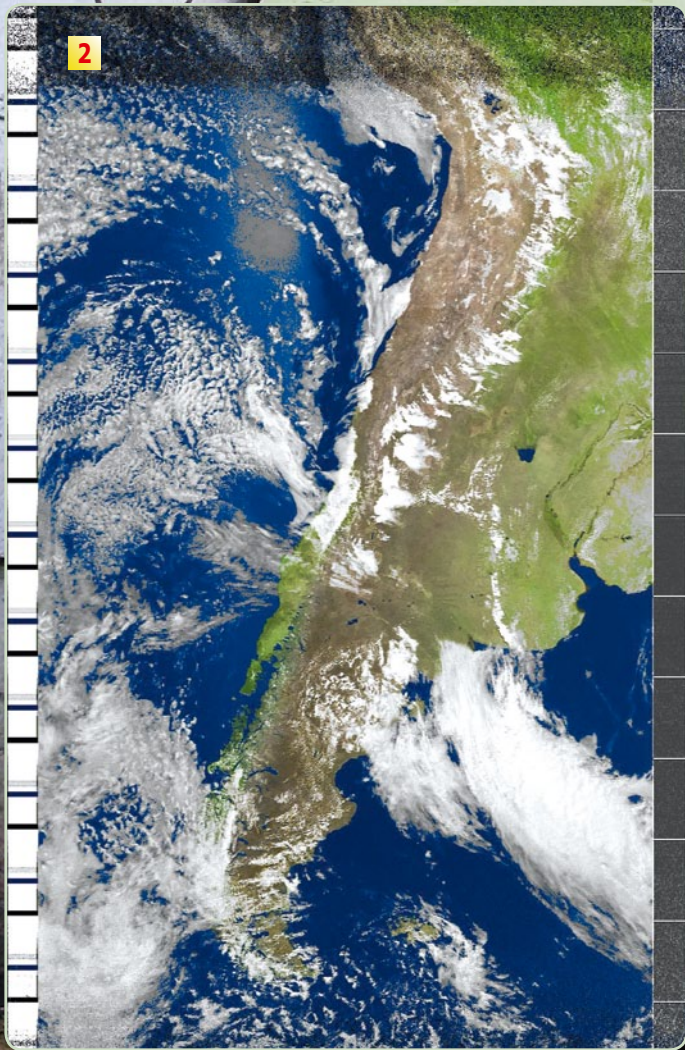

Portal BSD - Satélite e TV Dig x

www.portalbsd.com.br/novo/viewforum.php?f=1

MEMBROS SatClube ID: Senha:

BSD

The Best Satellite and Digital TV Forum in Brasil

www.portalbsd.com.br

Receptor Digital de Satélite F11 Grave esse nome

VISIONTEC R\$ 149,99

SATCLUBE FÓRUM

USATEL

Soluções Inteligentes

TECSYS

Receptores DVB-S e DVB-S2

TELE

Tópicos fixos e em destaque	Respostas	Visualizações	Atualizado
1. INFOBAT BSD Autor: VALDECIR ADORNO DA SILVA (Pág. 1, 11, 12, 13)	247	12894	21/10/2011, 14:19
2. Modificador de sinal DDM pra apontamento de antenas Autor: Marcos Bernardini (Benni) (Pág. 1, 2, 3)	46	1306	21/10/2011, 12:53
3. KEY CARD Autor: VALDECIR ADORNO DA SILVA (Pág. 1, 2, 3, 4, 5)	739	87012	07/10/2011, 21:50
4. Receptor Telesystem F11 e F12 HD (tópico único) Autor: Edis Batista (Pág. 1, 2, 3, 4)	77	2063	20/10/2011, 11:12
5. Canais terrestres Autor: Edis Batista (Pág. 1, 2, 3, 4)	12	10/2011, 11:12	
6. Canais terrestres Autor: Edis Batista (Pág. 1, 2, 3, 4)	83	3866	12/10/2011, 18:39

China Broadcasting Directory

CHINA INFOMEDIA 2012

10TH EDITION

www.cnbroadcasting.com

CnBroadcasting

China Infomedia

GoSat

Direct2Suppliers

Products

Expo

Stay Informed

China Infomedia 2012

www.cnbroadcasting.com

Hit or Miss ?

You need a guide - China Broadcasting Directory to hit the target !

For free Directory **ONLINE**

www.cnbroadcasting.com



MOST FAMOUS Satellite and TVRO Enthusiasts **WORLDWIDE**



Oscar

Chile

Oscar Campos, Santiago, Chile



www.TELE-satellite.com/TELE-satellite-1209/eng/oscar.pdf

SatGuy

USA

Scott Greczkowski, Newington, CT, USA



www.TELE-satellite.com/TELE-satellite-1205/eng/satelliteguys.us.pdf

Big Ronaldo

Brazil

Ronaldo Zovaro, Louveira, Brazil



www.TELE-satellite.com/TELE-satellite-1207/eng/bigronaldo.pdf

Györgi

Hungary

Györgi (George), Budapest



www.TELE-satellite.com/TELE-satellite-1203/eng/dxerbudapest.pdf

DX-Ralf

Germany

Ralf Sunke, Emlichheim, Germany



www.TELE-satellite.com/TELE-satellite-1207/eng/dx-ralf.pdf

Benni

Brazil

Marcos Eduardo Bernardini, Jundiaí (SP)



www.TELE-satellite.com/TELE-satellite-1201/eng/bsd.pdf

DX Bozoth Hungary

Laszlo Toth, Püspökladany



www.TELE-satellite.com/TELE-satellite-1111/eng/dx-bozoth.pdf

Jang Lee Korea

Jang Lee, Gangwon



www.TELE-satellite.com/TELE-satellite-1105/eng/korea.pdf

Ken Wong Hongkong


Ken Wong, Hongkong



www.TELE-satellite.com/TELE-satellite-1111/eng/dxerhongkong.pdf

Keito, Takao Japan

Keito Takahashi and Takao Kameda, Tokyo

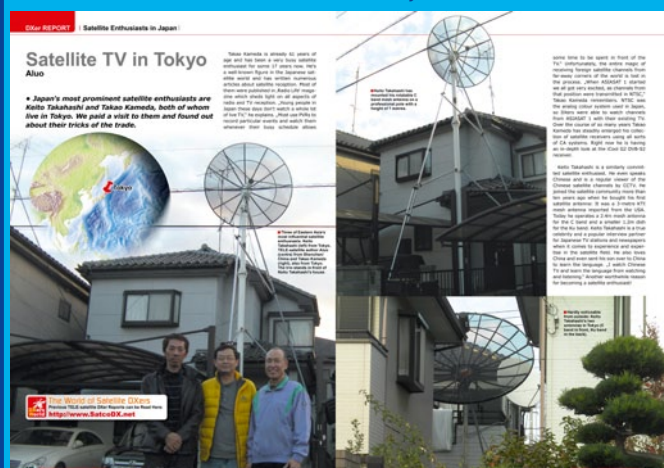

www.TELE-satellite.com/TELE-satellite-1103/eng/japan-dxer.pdf

DXer Iran

Daryoush, Mehdi, Saeed, Davood, Milad



www.TELE-satellite.com/TELE-satellite-1107/eng/dishes-in-iran.pdf

Ponny Germany

Rainer Schulz and Berndt Rosenberger, Tröbitz



www.TELE-satellite.com/TELE-satellite-1101/eng/ponny.pdf

Pepsi

Pepsi, Mengyang, Sichuan, China



www.TELE-satellite.com/TELE-satellite-1011/eng/pepsi.pdf

China

Astra Fan

Cahit Nuri Or, Adapazari



www.TELE-satellite.com/TELE-satellite-1005/eng/astrainturkey.pdf

Turkey

Jiri

Jiri Vanek, Jablonec nad Nisou



www.TELE-satellite.com/TELE-satellite-1009/eng/jiri.pdf

Czech

Satheesan

Satheesan Puzhakkara, Thiruvananthapuram



www.TELE-satellite.com/TELE-satellite-1003/eng/indiadxer.pdf

India

Siddharth

Siddharth Gautam, New Delhi



www.TELE-satellite.com/TELE-satellite-1007/eng/india.pdf

India

Hakan

Hakan Kasli, Antalya



www.TELE-satellite.com/TELE-satellite-1001/eng/dxerinturkey.pdf

Turkey


Yahya Saudi Arabia

Yahya, Saudi Arabia

Clear DE POINT Software Translator

Enigma in Arabic – How does it work? Paying a visit to Yahya in Saudi Arabia

When you switch on a receiver for the very first time you are usually asked which language you prefer. English, German or French are obvious choices, but what about Russian? ... Arabic? From a technical point of view translating one language into another is no big deal, but while most languages are written from left to right, such as Arabic, start on the right and go left, and that's where the problems begin. The rest of it is more technical and to learn how these problems can be solved, we have someone in Saudi Arabia and would rather not have his last name published because what he does is considered a grey zone by some, even though it's not against the law.

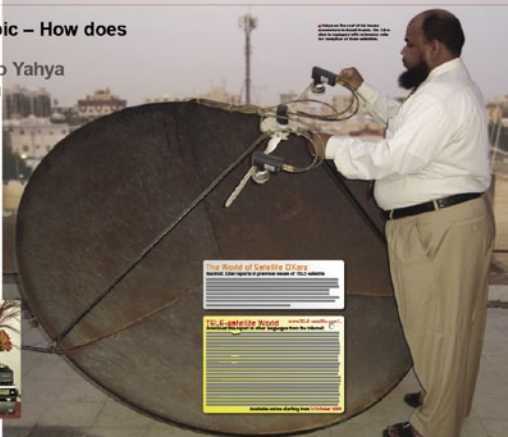

www.TELE-satellite.com/TELE-satellite-0911/eng/yahya.pdf

Roy UK

Roy Carman, London

Clear DE POINT Satellite DEX in London

I wish I was 20 again!

Roy Carman is crazy about feed hunting. With his two motorized dishes he is constantly on the lookout for satellite signal transmitters from all of the satellites he can see. He's already working on picking up DVB-S2 feed signals.



www.TELE-satellite.com/TELE-satellite-0909/eng/londondex.pdf

Vincent Indonesia

Vincent, Jakarta

SAT STATION REPORT

Satellite Station Report, Indonesia

The wind was stronger!

Think about tough luck. A recent storm tore down the 1.8 m dish of the Satelit station in Indonesia. The mounting parts could not withstand the huge wind loads during the storm. Naturally, the new construction is to be erected well before the next storm. We all learn from our mistakes!



www.TELE-satellite.com/TELE-satellite-0909/eng/indonesia.pdf

Applesat China

Applesat, Beijing

Clear DE POINT HDTV Satellite Reception in Beijing

The New DXer: HDTV

TELE-satellite regularly reports on satellite DXers, i.e. wild men, this category covered all those who play around with satellite reception as a hobby. Now there enters a new category: the HDTV DXer! They are only interested in HDTV channels in DVB-S2, and nothing else. We met up with one of the first of these specialized HDTV DXers in Beijing. It is the reason why private satellite reception is not allowed in China except in far land areas and the consequences of HDTV is therefore twice as uncommon.



www.TELE-satellite.com/TELE-satellite-0907/eng/applesat.pdf

Stone China

ShiToy, Beijing

Clear DE POINT Satellite Reception Beijing, China

The Sat Handyman from Beijing

One of the most active handymen would have to be ShiToy who adopted the English name Stone. He is an easy character, the Chinese word ShiToy means stone in English. Thanks to his education as an IT technician he knows his way around and involves himself intensively on the technical side of his satellite reception hobby. We met up with him in his apartment in a newly built section in northern Beijing, just outside the 5th Ring Road – actually, there really isn't any old-town section in Beijing; all of the construction took place within the past few decades.



www.TELE-satellite.com/TELE-satellite-0909/eng/beijingdxe.pdf

Aluosat China

Luo Shigang, Shenzhen

COMPANY REPORT Satellite Consultant, China

Aluo-sat Knows Everybody!

Someone active in the satellite field in China can hardly get around meeting Luo Shigang, owner of Aluo-sat. He is a high-profile figure in many other satellite areas as well. Since China is entering the DVB age in 2010 in a good time for watching Luo Shigang in his office in Shenzhen.



www.TELE-satellite.com/TELE-satellite-0905/eng/aluosat.pdf

Pharmacist South Africa

Pieter Redelinghuys, Klerksdorp



www.TELE-satellite.com/TELE-satellite-0901/eng/pharmacist.pdf

Ron Netherlands


Ron Ebersson, Amsterdam



www.TELE-satellite.com/TELE-satellite-0811/eng/ka-band.pdf

Diego Spain

Diego Fernando Sanchez Rosende, Tenerife

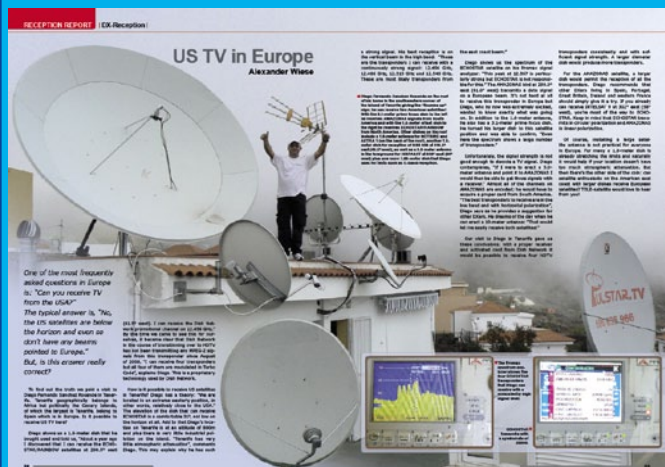

www.TELE-satellite.com/TELE-satellite-0901/eng/dxer.pdf

Juan Carlos Chile

Juan Carlos Miranda Duarte, Santiago



www.TELE-satellite.com/TELE-satellite-0807/eng/chile.pdf

Feedhunter Netherlands

Rini de Weijze, Amsterdam



www.TELE-satellite.com/TELE-satellite-0811/eng/feedhunter-rini.pdf

Tony Canada

Tony Di Rienzo, Toronto



www.TELE-satellite.com/TELE-satellite-0711/eng/tony.pdf

FÓRUM SBTVD

BRAZILIAN DIGITAL
TERRESTRIAL TV
FORUM

www.forumsbtvd.org.br
www.dtv.org.br



The New IPTV Standard



- **OIPF** provides the IPTV market with open end-2-end IPTV specifications
- **OIPF** includes most IPTV stakeholders
- **OIPF** stimulates a go-to-market drive from the IPTV industry

Open IPTV Forum
650, Route des Lucioles
F-06921 SOPHIA-ANTIPOLIS Cedex
France

Tel: +33 4 92 94 43 83
Fax: +33 4 92 38 52 90
Email: contact@oipf.tv
Website: www.oipf.tv

DVBS 247°E (113°W) SATMEX 6
 DVBS DVBS2 288°E (72°W) AMC 6
 DVBS 297°E (63°W) ESTRELLA DEL SUR
 DVBS2 299°E (61°W) AMAZONAS
 DVBS DVBS2 330°E (30°W) HISPASAT
 DVBS 352.5°E (7.5°W) ATLANTIC
 DVBS2 359.2°E



DIGITAL TV

Transponder Streams

around the

WORLD



Highlights:

- ATSC with HDTV (USA)
- ATSC with 1 Single Channel (USA)
- ATSC with 2 Audio PIDs for 1 Video (USA)
- ATSC with High Null Packets (USA)
- ATSC with Wrong TS ID (USA)
- ATSC Fully Packed (USA)
- ATSC with Channel Name Missing (USA)
- ATSC with Private Sections
- ATSC with Additional Data Services

- DTMB with HDTV (China)
- DTMB with false video descriptor (China)
- DTMB with MHEG (Hongkong)
- DVB-C in Nagravision 3 (Portugal)
- DVB-S with 3D (ASTRA)
- DVB-S with MPEG2 and H.264 mix (PALAPA)
- DVB-S in MIS (ATLANIC BIRD)
- DVB-S2 with HDTV (HOTBIRD)
- DVB-S2 with MPEG 4:2:2 (EUROBIRD)
- DVB-S2 with 3D (TURKSAT)

- DVB-S2 with HDTV (AMAZONAS)
- DVB-S2 with 3D (THOR)
- DVB-S2 with 1Seg mobile TV (AMC 6)
- DVB-T with radio (Netherlands)
- DVB-T with MHEG (UK)
- DVB-T as retransmission off satellite (Qatar)
- DVB-T2 with HDTV (Germany, UK)
- ISDB-T with 1Seg mobile TV and HD (Brazil)

ATSC

terrestrial

US

USA

ATSC

US

Transportstream ID

751

Recording

TELE-satellite

Transmitter

Atlanta Channel 19

Remark

1 Single Channel

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transportstream ID	Transmitter	Atlanta Channel 19	Recording	TELE-satellite
49	0x0031	MPEG2 Video	-	16521.84	85.17	WGCL-TV	4621	0x120D	ETT	-	0.87 0.00 N/A
8182	0x1FF6	?	-	1831.31	9.44	N/A	4125	0x101D	EIT	-	0.66 0.00 N/A
52	0x0034	AC3 Audio	-	460.87	2.38	WGCL-TV	4104	0x1008	EIT	-	0.66 0.00 N/A
512	0x0200	AC3 Audio	-	263.35	1.36	N/A	4102	0x1006	EIT	-	0.66 0.00 N/A
8191	0x1FFF	Null Packets	-	182.61	0.94	N/A	4101	0x1005	EIT	-	0.66 0.00 N/A
8187	0x1FFB	MGT	-	60.20	0.31	N/A	4099	0x1003	EIT	-	0.66 0.00 N/A
0	0x0000	PAT	-	15.08	0.08	N/A	4098	0x1002	EIT	-	0.66 0.00 N/A
48	0x0030	PMT	-	15.04	0.08	WGCL-TV	4124	0x101C	EIT	-	0.52 0.00 N/A
1	0x0001	CAT	-	15.04	0.08	N/A	4123	0x101B	EIT	-	0.52 0.00 N/A
4108	0x100C	EIT	-	6.65	0.03	N/A	4122	0x101A	EIT	-	0.52 0.00 N/A
4620	0x120C	ETT	-	4.46	0.02	N/A	4117	0x1015	EIT	-	0.52 0.00 N/A
8186	0x1FFA	?	-	1.57	0.01	N/A	4116	0x1014	EIT	-	0.52 0.00 N/A
4109	0x100D	EIT	-	1.44	0.01	N/A	4115	0x1013	EIT	-	0.52 0.00 N/A
4111	0x100F	EIT	-	0.96	0.00	N/A	4114	0x1012	EIT	-	0.52 0.00 N/A
4110	0x100E	EIT	-	0.96	0.00	N/A	4127	0x101F	ETT	-	0.44 0.00 N/A
							4126	0x101E	ETT	-	0.44 0.00 N/A
							4107	0x100B	EIT	-	0.44 0.00 N/A
							4106	0x100A	EIT	-	0.44 0.00 N/A
							4105	0x1009	EIT	-	0.44 0.00 N/A
							4103	0x1007	EIT	-	0.44 0.00 N/A
							4100	0x1004	EIT	-	0.44 0.00 N/A
							4097	0x1001	EIT	-	0.44 0.00 N/A
							4096	0x1000	EIT	-	0.44 0.00 N/A
							4121	0x1019	EIT	-	0.35 0.00 N/A
							4120	0x1018	EIT	-	0.35 0.00 N/A
							4119	0x1017	EIT	-	0.35 0.00 N/A
							4118	0x1016	EIT	-	0.35 0.00 N/A
							4113	0x1011	EIT	-	0.35 0.00 N/A
							4112	0x1010	EIT	-	0.35 0.00 N/A
							4616	0x1208	ETT	-	0.22 0.00 N/A
							4637	0x121D	ETT	-	0.17 0.00 N/A
							4634	0x121A	ETT	-	0.17 0.00 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 83 MB

ts.TELE-satellite.com/ATSC/US/Atlanta-Ch19-1201.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 740 MB

www.transponderstream.com/ATSC/US/Atlanta-Ch19-1201.ts

ATSC

US

Transportstream ID

1379

Recording

TELE-satellite

Transmitter

Baltimore Channel 42

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transportstream ID	Transmitter	Baltimore Channel 42	Recording	TELE-satellite
49	0x0031	MPEG2 Video	-	12609.24	64.85	MPT-HD	69	0x0045	AC3 Audio	-	197.86 1.02 MPT-2
65	0x0041	MPEG2 Video	-	3042.52	15.65	MPT-2	68	0x0044	AC3 Audio	-	197.86 1.02 MPT-2
81	0x0051	MPEG2 Video	-	2040.13	10.49	V-me	7427	0x1D03	EIT	-	28.68 0.15 N/A
8191	0x1FFF	Null Packets	-	405.07	2.08	N/A	7426	0x1D02	EIT	-	25.49 0.13 N/A
52	0x0034	AC3 Audio	-	394.67	2.03	MPT-HD	7425	0x1D01	EIT	-	25.17 0.13 N/A
85	0x0055	AC3 Audio	-	197.86	1.02	V-me	8187	0x1FFB	MGT	-	18.90 0.10 N/A
84	0x0054	AC3 Audio	-	197.86	1.02	V-me	7424	0x1D00	EIT	-	18.90 0.10 N/A
							0	0x0000	PAT	-	15.82 0.08 N/A
							7683	0x1E03	ETT	-	4.04 0.02 N/A
							80	0x0050	PMT	-	4.04 0.02 V-me
							64	0x0040	PMT	-	4.04 0.02 MPT-2
							48	0x0030	PMT	-	3.93 0.02 MPT-HD
							7682	0x1E02	ETT	-	3.82 0.02 N/A
							7681	0x1E01	ETT	-	3.82 0.02 N/A
							7680	0x1E00	ETT	-	3.19 0.02 N/A
							7808	0x1E80	ETT	-	0.53 0.00 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 76 MB

ts.TELE-satellite.com/ATSC/US/Baltimore-Ch42-1201.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 744 MB

www.transponderstream.com/ATSC/US/Baltimore-Ch42-1201.ts

ATSC

US

Transportstream ID

459

Recording

TELE-satellite

Transmitter

Denver Channel 18

Remark

Additional Data Services

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transportstream ID	Transmitter	Denver Channel 18	Recording	TELE-satellite
49	0x0031	MPEG2 Video	-	6899.04	35.11	KRMA-DT	154	0x009A	Data	-	91.11 0.46 _Service 9
8191	0x1FFF	Null Packets	-	5270.25	26.82	N/A	4097	0x1001	EIT	-	32.86 0.17 N/A
81	0x0051	MPEG2 Video	-	3293.70	16.76	Create	4096	0x1000	EIT	-	29.87 0.15 N/A
65	0x0041	MPEG2 Video	-	2917.56	14.85	V-Me	8187	0x1FFB	MGT	-	22.41 0.11 N/A
52	0x0034	AC3 Audio	-	466.84	2.38	KRMA-DT	0	0x0000	PAT	-	16.97 0.09 N/A
84	0x0054	AC3 Audio	-	200.02	1.02	Create	4608	0x1200	ETT	-	13.04 0.07 N/A
68	0x0044	AC3 Audio	-	200.02	1.02	V-Me	170	0x00AA	Data	-	10.18 0.05 _Service 10
69	0x0045	AC3 Audio	-	133.34	0.68	V-Me	4610	0x1202	ETT	-	9.23 0.05 N/A
							4611	0x1203	ETT	-	8.69 0.04 N/A
							4609	0x1201	ETT	-	8.42 0.04 N/A
							160	0x00A0	PMT	-	3.94 0.02 _Service 10
							144	0x0090	PMT	-	3.94 0.02 _Service 9
							80	0x0050	PMT	-	3.94 0.02 Create
							64	0x0040	PMT	-	3.94 0.02 V-Me
							48	0x0030	PMT	-	3.94 0.02 KRMA-DT
							4099	0x1003	EIT	-	3.26 0.02 N/A
							4098	0x1002	EIT	-	2.99 0.02 N/A
							5120	0x1400	ETT	-	1.09 0.01 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 74 MB

ts.TELE-satellite.com/ATSC/US/Denver-Ch18-1204.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 739 MB

www.transponderstream.com/ATSC/US/Denver-Ch18-1204.ts

ATSC

US

Transportstream ID

455

Recording

TELE-satellite

Transmitter

Denver Channel 34

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transportstream ID	Transmitter	Denver Channel 34	Recording	TELE-satellite
49	0x0031	MPEG2 Video	-	12364.43	63.44	KWGN-DT	8187	0x1FFB	MGT	-	78.96 0.41 N/A
65	0x0041	MPEG2 Video	-	3283.25	16.84	THISV	0	0x0000	PAT	-	18.07 0.09 N/A
8191	0x1FFF	Null Packets	-	2876.56	14.76	N/A	64	0x0040	PMT	-	17.82 0.09 THISV
52	0x0034	AC3 Audio	-	395.55	2.03	KWGN-DT	48	0x0030	PMT	-	17.82 0.09 KWGN-DT
53	0x0035	AC3 Audio	-	198.52	1.02	KWGN-DT	4101	0x1005	EIT	-	11.14 0.06 N/A
68	0x0044	AC3 Audio	-	198.27	1.02	THISV	4102	0x1006	EIT	-	7.18 0.04 N/A
							4104	0x1008	EIT	-	6.93 0.04 N/A
							4103	0x1007	EIT	-	5.20 0.03 N/A
							4614	0x1206	ETT	-	4.70 0.02 N/A
							4613	0x1205	ETT	-	2.72 0.01 N/A
							4615	0x1207	ETT	-	2.23 0.01 N/A
							4616	0x1208	ETT	-	1.24 0.01 N/A
							4607	0x11FF	ETT	-	0.50 0.00 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 76 MB

ts.TELE-satellite.com/ATSC/US/Denver-Ch34-1204.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 740 MB

www.transponderstream.com/ATSC/US/Denver-Ch34-1204.ts

ATSC**US****Transportstream ID****515****Recording****TELE-satellite****Transmitter Hartford Channel 35****Remark****big null packet**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
49	0x0031	MPEG2 Video	-	12228.17	63.00	WVIT-HD
8191	0x1FFF	Null Packets	-	3266.54	16.83	N/A
8182	0x1FF6	?	-	1841.61	9.49	N/A
65	0x0041	MPEG2 Video	-	1091.77	5.63	NBC+
52	0x0034	AC3 Audio	-	395.05	2.04	WVIT-HD
53	0x0035	AC3 Audio	-	197.63	1.02	WVIT-HD
68	0x0044	AC3 Audio	-	197.58	1.02	NBC+
8187	0x1FFB	MGT	-	86.65	0.45	N/A

64	0x0040	PMT	-	25.04	0.13	NBC+
48	0x0030	PMT	-	25.04	0.13	WVIT-HD
0	0x0000	PAT	-	24.98	0.13	N/A
5000	0x1388	EIT	-	10.73	0.06	N/A
5133	0x140D	ETT	-	3.25	0.02	N/A
5005	0x138D	EIT	-	1.95	0.01	N/A
5001	0x1389	EIT	-	1.79	0.01	N/A
5134	0x140E	ETT	-	1.63	0.01	N/A
5131	0x140B	ETT	-	1.30	0.01	N/A

5006	0x138E	EIT	-	1.30	0.01	N/A
5132	0x140C	ETT	-	1.14	0.01	N/A
5130	0x140A	ETT	-	1.14	0.01	N/A
5129	0x1409	ETT	-	0.98	0.01	N/A
5007	0x138F	EIT	-	0.98	0.01	N/A
5128	0x1408	ETT	-	0.87	0.00	N/A
5003	0x138B	EIT	-	0.81	0.00	N/A
5002	0x138A	EIT	-	0.81	0.00	N/A
5004	0x138C	EIT	-	0.54	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 74 MB****ts.TELE-satellite.com/ATSC/US/Hartford-Ch35-1201.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 602 MB****www.transponderstream.com/ATSC/US/Hartford-Ch35-1201.ts****ATSC****US****Transportstream ID****1639****Recording****TELE-satellite****Transmitter Kansas City Channel 24****Remark one channel with high bitrate**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
49	0x0031	MPEG2 Video	-	18493.27	95.49	KCTV
52	0x0034	AC3 Audio	-	394.20	2.04	KCTV
8191	0x1FFF	Null Packets	-	367.74	1.90	N/A
8187	0x1FFB	MGT	-	31.18	0.16	N/A
48	0x0030	PMT	-	14.97	0.08	KCTV
1	0x0001	CAT	-	14.97	0.08	N/A
0	0x0000	PAT	-	14.97	0.08	N/A

4101	0x1005	EIT	-	7.38	0.04	N/A
4100	0x1004	EIT	-	7.38	0.04	N/A
4357	0x1105	ETT	-	5.74	0.03	N/A
4103	0x1007	EIT	-	5.33	0.03	N/A
4102	0x1006	EIT	-	4.92	0.03	N/A
4358	0x1106	ETT	-	1.44	0.01	N/A
4359	0x1107	ETT	-	0.82	0.00	N/A
4096	0x1000	EIT	-	0.62	0.00	N/A

4353	0x1101	ETT	-	0.41	0.00	N/A
4099	0x1003	EIT	-	0.41	0.00	N/A
4098	0x1002	EIT	-	0.41	0.00	N/A
4097	0x1001	EIT	-	0.41	0.00	N/A
4355	0x1103	ETT	-	0.21	0.00	N/A
4354	0x1102	ETT	-	0.21	0.00	N/A
4352	0x1100	ETT	-	0.21	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 76 MB****ts.TELE-satellite.com/ATSC/US/KansasCity-Ch24-1201.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 741 MB****www.transponderstream.com/ATSC/US/KansasCity-Ch24-1201.ts****ATSC****US****Transportstream ID****2083****Recording****TELE-satellite****Transmitter Las Vegas Channel 11**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
49	0x0031	MPEG2 Video	-	7803.76	40.09	KLVXHD
65	0x0041	MPEG2 Video	-	3571.86	18.35	KLVXSD1
8182	0x1FF6	?	-	2763.31	14.20	N/A
81	0x0051	MPEG2 Video	-	2496.00	12.82	KLVXSD2
2304	0x0900	Private Data	-	1038.73	5.34	_Service 6
52	0x0034	AC3 Audio	-	394.91	2.03	KLVXHD
8191	0x1FFF	Null Packets	-	219.21	1.13	N/A
68	0x0044	AC3 Audio	-	198.20	1.02	KLVXSD1
84	0x0054	AC3 Audio	-	197.51	1.01	KLVXSD2
85	0x0055	AC3 Audio	-	132.17	0.68	KLVXSD2
69	0x0045	AC3 Audio	-	132.17	0.68	KLVXSD1
53	0x0035	AC3 Audio	-	132.05	0.68	KLVXHD
138	0x008A	Data	-	90.24	0.46	_Service 8

8187	0x1FFB	MGT	-	35.98	0.18	N/A
7680	0x1E00	ETT	-	28.44	0.15	N/A
7424	0x1D00	EIT	-	24.10	0.12	N/A
0	0x0000	PAT	-	16.79	0.09	N/A
128	0x0080	PMT	-	15.19	0.08	_Service 8
112	0x0070	PMT	-	15.19	0.08	_Service 7
64	0x0040	PMT	-	15.19	0.08	KLVXSD1
96	0x0060	PMT	-	15.08	0.08	_Service 6
80	0x0050	PMT	-	15.08	0.08	KLVXSD2
48	0x0030	PMT	-	15.08	0.08	KLVXHD
7681	0x1E01	ETT	-	14.16	0.07	N/A
122	0x007A	Data	-	10.05	0.05	_Service 7
7682	0x1E02	ETT	-	9.37	0.05	N/A
7425	0x1D01	EIT	-	8.22	0.04	N/A

7683	0x1E03	ETT	-	7.77	0.04	N/A
7684	0x1E04	ETT	-	5.71	0.03	N/A
7426	0x1D02	EIT	-	5.37	0.03	N/A
7685	0x1E05	ETT	-	5.25	0.03	N/A
7686	0x1E06	ETT	-	4.57	0.02	N/A
7687	0x1E07	ETT	-	4.11	0.02	N/A
7427	0x1D03	EIT	-	3.88	0.02	N/A
7428	0x1D04	EIT	-	3.77	0.02	N/A
126	0x007E	?	-	3.77	0.02	N/A
7808	0x1E08	ETT	-	2.97	0.02	N/A
7431	0x1D07	EIT	-	2.51	0.01	N/A
7430	0x1D06	EIT	-	2.51	0.01	N/A
7429	0x1D05	EIT	-	2.51	0.01	N/A
8186	0x1FFA	?	-	1.49	0.01	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 75 MB****ts.TELE-satellite.com/ATSC/US/LasVegas-Ch11-1201.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 741 MB****www.transponderstream.com/ATSC/US/LasVegas-Ch11-1201.ts****ATSC****US****Transportstream ID****0****Recording****TELE-satellite****Transmitter Las Vegas Channel 15****High Null Packets, Wrong TS ID**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
8191	0x1FFF	Null Packets	-	10779.99	55.30	N/A
49	0x0031	MPEG2 Video	-	8444.28	43.32	KELV HD
51	0x0033	AC3 Audio	-	198.52	1.02	KELV HD
8187	0x1FFB	MGT	-	18.81	0.10	N/A

0	0x0000	PAT	-	15.84	0.08	N/A
7425	0x1D01	EIT	-	9.90	0.05	N/A
7427	0x1D03	EIT	-	9.41	0.05	N/A
7426	0x1D02	EIT	-	6.27	0.03	N/A
48	0x0030	PMT	-	3.96	0.02	KELV HD

7424	0x1D00	EIT	-	3.14	0.02	N/A
7681	0x1E01	ETT	-	1.49	0.01	N/A
7683	0x1E03	ETT	-	0.99	0.01	N/A
7682	0x1E02	ETT	-	0.83	0.00	N/A
7680	0x1E00	ETT	-	0.66	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 75 MB****ts.TELE-satellite.com/ATSC/US/LasVegas-Ch15-1201.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 747 MB****www.transponderstream.com/ATSC/US/LasVegas-Ch15-1201.ts****ATSC****US****Transportstream ID****2085****Recording****TELE-satellite****Transmitter Las Vegas Channel 17****High Null Packets**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
8191	0x1FFF	Null Packets	-	9607.46	49.38	N/A
49	0x0031	MPEG2 Video	-	9584.70	49.26	KEEN
51	0x0033	AC3 Audio	-	198.06	1.02	KEEN
0	0x0000	PAT	-	16.66	0.09	N/A
8187	0x1FFB	MGT	-	16.00	0.08	N/A

7680	0x1E00	ETT	-	8.91	0.05	N/A
7424	0x1D00	EIT	-	5.94	0.03	N/A
7681	0x1E01	ETT	-	4.62	0.02	N/A
48	0x0030	PMT	-	3.79	0.02	KEEN
7682	0x1E02	ETT	-	3.46	0.02	N/A
7683	0x1E03	ETT	-	2.31	0.01	N/A

7425	0x1D01	EIT	-	1.98	0.01	N/A
7808	0x1E08	ETT	-	1.48	0.01	N/A
7426	0x1D02	EIT	-	1.32	0.01	N/A
7427	0x1D03	EIT	-	0.99	0.01	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 82 MB****ts.TELE-satellite.com/ATSC/US/LasVegas-Ch17-1201.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 742 MB****www.transponderstream.com/ATSC/US/LasVegas-Ch17-1201.ts**

ATSC

US

Transportstream ID

1 Recording

TELE-satellite

Transmitter Las Vegas Channel 28

High Null Packets, Wrong TS ID

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
8191	0x1FFF	Null Packets	-	15042.84	77.13
481	0x01E1	MPEG2 Video	-	3979.30	20.40
482	0x01E2	AC3 Audio	-	198.48	1.02

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
483	0x01E3	AC3 Audio	-	198.34	1.02
8187	0x1FFB	MGT	-	30.96	0.16
480	0x01E0	PMT	-	14.87	0.08
0	0x0000	PAT	-	14.87	0.08

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
8147	0x1FD3	EIT	-	5.95	0.03
8146	0x1FD2	EIT	-	5.95	0.03
8145	0x1FD1	EIT	-	5.95	0.03
8144	0x1FD0	EIT	-	5.95	0.03

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 75 MB

ts.TELE-satellite.com/ATSC/US/LasVegas-Ch28-1201.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 728 MB

www.transponderstream.com/ATSC/US/LasVegas-Ch28-1201.ts

ATSC

US

Transportstream ID

359 Recording

TELE-satellite

Transmitter Los Angeles Channel 18

Remark Mechanic Channel Names

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
65	0x0041	MPEG2 Video	-	2950.49	15.06
177	0x00B1	MPEG2 Video	-	2525.59	12.89
129	0x0081	MPEG2 Video	-	2525.34	12.89
145	0x0091	MPEG2 Video	-	2453.95	12.52
161	0x00A1	MPEG2 Video	-	1914.02	9.77
81	0x0051	MPEG2 Video	-	1649.76	8.42
113	0x0071	MPEG2 Video	-	1582.83	8.08
97	0x0061	MPEG2 Video	-	1260.07	6.43
49	0x0031	MPEG2 Video	-	1020.85	5.21
8191	0x1FFF	Null Packets	-	164.36	0.84
164	0x00A4	AC3 Audio	-	133.12	0.68
116	0x0074	AC3 Audio	-	133.12	0.68

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
100	0x0064	AC3 Audio	-	133.12	0.68
68	0x0044	AC3 Audio	-	133.12	0.68
180	0x00B4	AC3 Audio	-	132.87	0.68
148	0x0094	AC3 Audio	-	132.87	0.68
132	0x0084	AC3 Audio	-	132.87	0.68
84	0x0054	AC3 Audio	-	132.87	0.68
52	0x0034	AC3 Audio	-	132.87	0.68
7424	0x1D00	EIT	-	85.77	0.44
8187	0x1FFB	MGT	-	31.24	0.16
0	0x0000	PAT	-	30.49	0.16
7425	0x1D01	EIT	-	28.01	0.14
7680	0x1E00	ETT	-	23.80	0.12
7681	0x1E01	ETT	-	18.84	0.10

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
7808	0x1E80	ETT	-	13.63	0.07
7426	0x1D02	EIT	-	13.14	0.07
7427	0x1D03	EIT	-	12.39	0.06
176	0x00B0	PMT	-	9.17	0.05
160	0x00A0	PMT	-	9.17	0.05
144	0x0090	PMT	-	9.17	0.05
128	0x0080	PMT	-	9.17	0.05
112	0x0070	PMT	-	9.17	0.05
96	0x0060	PMT	-	9.17	0.05
80	0x0050	PMT	-	9.17	0.05
64	0x0040	PMT	-	9.17	0.05
48	0x0030	PMT	-	9.17	0.05
7683	0x1E03	ETT	-	6.45	0.03

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 75 MB

ts.TELE-satellite.com/ATSC/US/LosAngeles-Ch18-1204.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 742 MB

www.transponderstream.com/ATSC/US/LosAngeles-Ch18-1204.ts

ATSC

US

Transportstream ID

325 Recording

TELE-satellite

Transmitter Los Angeles Channel 24

Remark Identical Channel Names

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
65	0x0041	MPEG2 Video	-	2642.06	13.35
145	0x0091	MPEG2 Video	-	2336.30	11.80
81	0x0051	MPEG2 Video	-	2251.67	11.38
49	0x0031	MPEG2 Video	-	2223.47	11.23
129	0x0081	MPEG2 Video	-	2115.90	10.69
257	0x0101	MPEG2 Video	-	2105.00	10.64
113	0x0071	MPEG2 Video	-	1974.49	9.98
97	0x0061	MPEG2 Video	-	1835.34	9.27
8191	0x1FFF	Null Packets	-	400.16	2.02
260	0x0104	AC3 Audio	-	233.18	1.18
132	0x0084	AC3 Audio	-	202.34	1.02

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
84	0x0054	AC3 Audio	-	201.59	1.02
68	0x0044	AC3 Audio	-	201.59	1.02
52	0x0034	AC3 Audio	-	201.59	1.02
148	0x0094	AC3 Audio	-	200.83	1.01
116	0x0074	AC3 Audio	-	200.83	1.01
100	0x0064	AC3 Audio	-	200.46	1.01
8187	0x1FFB	MGT	-	55.29	0.28
5000	0x1388	EIT	-	45.13	0.23
0	0x0000	PAT	-	23.32	0.12
256	0x0100	PMT	-	11.66	0.06
144	0x0090	PMT	-	11.66	0.06
128	0x0080	PMT	-	11.66	0.06

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
112	0x0070	PMT	-	11.66	0.06
96	0x0060	PMT	-	11.66	0.06
80	0x0050	PMT	-	11.66	0.06
64	0x0040	PMT	-	11.66	0.06
48	0x0030	PMT	-	11.66	0.06
5130	0x140A	ETT	-	10.15	0.05
5129	0x1409	ETT	-	9.78	0.05
5128	0x1408	ETT	-	9.78	0.05
5001	0x1389	EIT	-	9.03	0.05
5003	0x138B	EIT	-	4.51	0.02
5002	0x138A	EIT	-	4.51	0.02

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 74 MB

ts.TELE-satellite.com/ATSC/US/LosAngeles-Ch24-1204.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 742 MB

www.transponderstream.com/ATSC/US/LosAngeles-Ch24-1204.ts

ATSC

US

Transportstream ID

2011 Recording

TELE-satellite

Transmitter Newark Channel 13

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
81	0x0051	MPEG2 Video	-	12062.07	61.75
65	0x0041	MPEG2 Video	-	2855.28	14.62
49	0x0031	MPEG2 Video	-	2486.42	12.73
8191	0x1FFF	Null Packets	-	685.91	3.51
84	0x0054	AC3 Audio	-	398.03	2.04
68	0x0044	AC3 Audio	-	198.87	1.02
52	0x0034	AC3 Audio	-	198.87	1.02
86	0x0056	AC3 Audio	-	132.78	0.68

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
85	0x0055	AC3 Audio	-	132.48	0.68
149	0x0095	Data	-	90.50	0.46
7680	0x1E00	ETT	-	42.57	0.22
7424	0x1D00	EIT	-	35.72	0.18
8187	0x1FFB	MGT	-	32.15	0.16
144	0x0090	PMT	-	30.37	0.16
0	0x0000	PAT	-	30.07	0.15
7681	0x1E01	ETT	-	19.35	0.10
80	0x0050	PMT	-	15.18	0.08

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
64	0x0040	PMT	-	15.18	0.08
48	0x0030	PMT	-	14.89	0.08
7682	0x1E02	ETT	-	12.50	0.06
7425	0x1D01	EIT	-	11.31	0.06
7683	0x1E03	ETT	-	7.74	0.04
7426	0x1D02	EIT	-	7.74	0.04
7684	0x1E04	ETT	-	6.85	0.04
7427	0x1D03	EIT	-	5.66	0.03
7685	0x1E05	ETT	-	5.06	0.03

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 74 MB

ts.TELE-satellite.com/ATSC/US/Newark-Ch13-1201.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 716 MB

www.transponderstream.com/ATSC/US/Newark-Ch13-1201.ts



Transponderstreams are available on memory cards or by Internet download

www.transponderstream.com

ATSC**US**

TransportStream ID

2015 Recording

Ron Roessel

Transmitter New York Channel 63

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
49	0x0031	MPEG2 Video	-	4004.26	20.62	WMBC DT
129	0x0081	MPEG2 Video	-	3003.24	15.47	Azteca
113	0x0071	MPEG2 Video	-	3003.20	15.47	NTDTV
97	0x0061	MPEG2 Video	-	2502.68	12.89	SinoVSN
81	0x0051	MPEG2 Video	-	2002.13	10.31	CGN-TV
65	0x0041	MPEG2 Video	-	2002.13	10.31	MBN
8182	0x1FF6	?	-	921.74	4.75	N/A
8191	0x1FFF	Null Packets	-	780.78	4.02	N/A
52	0x0034	AC3 Audio	-	197.63	1.02	WMBC DT
84	0x0054	AC3 Audio	-	103.54	0.53	CGN-TV
164	0x00A4	AC3 Audio	-	103.50	0.53	WDNJ
148	0x0094	AC3 Audio	-	103.50	0.53	KCBN

132	0x0084	AC3 Audio	-	103.50	0.53	Azteca
116	0x0074	AC3 Audio	-	103.50	0.53	NTDTV
100	0x0064	AC3 Audio	-	103.50	0.53	SinoVSN
68	0x0044	AC3 Audio	-	103.50	0.53	MBN
4110	0x100E	EIT	-	53.12	0.27	N/A
8187	0x1FFB	MGT	-	45.62	0.23	N/A
160	0x00A0	PMT	-	15.08	0.08	WDNJ
112	0x0070	PMT	-	15.08	0.08	NTDTV
96	0x0060	PMT	-	15.08	0.08	SinoVSN
64	0x0040	PMT	-	15.08	0.08	MBN
0	0x0000	PAT	-	15.08	0.08	N/A
144	0x0090	PMT	-	15.04	0.08	KCBN
128	0x0080	PMT	-	15.04	0.08	Azteca

80	0x0050	PMT	-	15.04	0.08	CGN-TV
48	0x0030	PMT	-	15.04	0.08	WMBC DT
1	0x0001	CAT	-	15.04	0.08	N/A
4111	0x100F	EIT	-	7.62	0.04	N/A
4117	0x1015	EIT	-	2.93	0.02	N/A
4112	0x1010	EIT	-	2.93	0.02	N/A
4116	0x1014	EIT	-	2.73	0.01	N/A
4114	0x1012	EIT	-	2.73	0.01	N/A
4113	0x1011	EIT	-	2.73	0.01	N/A
4115	0x1013	EIT	-	2.54	0.01	N/A
8186	0x1FFA	?	-	1.56	0.01	N/A
4623	0x120F	ETT	-	0.20	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 89 MB

ts.TELE-satellite.com/ATSC/US/NewYork-Ch63-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 729 MB

www.transponderstream.com/ATSC/US/NewYork-Ch63-1110.ts

ATSC**US**

Transportstream ID

2491

Recording

TELE-satellite

Transmitter Philadelphia Channel 34

Remark

2 Audio PIDs for 1 Video

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
49	0x0031	MPEG2 Video	-	12865.42	66.17	WCAU-DT
65	0x0041	MPEG2 Video	-	3483.70	17.92	NonStop
8182	0x1FF6	?	-	1830.51	9.41	N/A
52	0x0034	AC3 Audio	-	395.90	2.04	WCAU-DT
8191	0x1FFF	Null Packets	-	377.23	1.94	N/A
68	0x0044	AC3 Audio	-	197.86	1.02	NonStop
53	0x0035	AC3 Audio	-	103.67	0.53	WCAU-DT
8187	0x1FFB	MGT	-	82.58	0.42	N/A
64	0x0040	PMT	-	25.08	0.13	NonStop

48	0x0030	PMT	-	25.08	0.13	WCAU-DT
0	0x0000	PAT	-	25.08	0.13	N/A
7424	0x1D00	EIT	-	14.49	0.07	N/A
7425	0x1D01	EIT	-	1.95	0.01	N/A
7559	0x1D87	ETT	-	1.49	0.01	N/A
7557	0x1D85	ETT	-	1.49	0.01	N/A
7426	0x1D02	EIT	-	1.49	0.01	N/A
7431	0x1D07	EIT	-	1.39	0.01	N/A
7430	0x1D06	EIT	-	1.11	0.01	N/A
7428	0x1D04	EIT	-	1.11	0.01	N/A

7427	0x1D03	EIT	-	1.11	0.01	N/A
7556	0x1D84	ETT	-	1.02	0.01	N/A
7558	0x1D86	ETT	-	0.93	0.00	N/A
7554	0x1D82	ETT	-	0.84	0.00	N/A
7429	0x1D05	EIT	-	0.84	0.00	N/A
7552	0x1D80	ETT	-	0.74	0.00	N/A
7555	0x1D83	ETT	-	0.65	0.00	N/A
7553	0x1D81	ETT	-	0.65	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 74 MB

ts.TELE-satellite.com/ATSC/US/Philadelphia-Ch34-1201.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 739 MB

www.transponderstream.com/ATSC/US/Philadelphia-Ch34-1201.ts

DTMB**terrestrial****CN****China****DTMB****CN**

Network Name

1

Recording

TELE-satellite

Transmitter Beijing Channel 59

Remark

encrypted

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
74	0x004A	MPEG2 Video	\$	2391.17	44.15	DVT2
58	0x003A	MPEG2 Video	\$	2390.80	44.14	DVT1
75	0x004B	MPEG Audio	\$	188.09	3.47	DVT2
59	0x003B	MPEG Audio	\$	188.05	3.47	DVT1

211	0x00D3	ECM/EMM	-	186.35	3.44	N/A
1282	0x0502	ECM/EMM	-	14.88	0.27	DVT2
1281	0x0501	ECM/EMM	-	14.88	0.27	DVT1
8191	0x1FFF	Null Packets	-	13.47	0.25	N/A
64	0x0040	PMT	-	6.84	0.13	DVT2

48	0x0030	PMT	-	6.84	0.13	DVT1
1	0x0001	CAT	-	6.82	0.13	N/A
0	0x0000	PAT	-	3.71	0.07	N/A
17	0x0011	SDT	-	2.97	0.05	N/A
21	0x0015	Network Sync	-	1.51	0.03	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 20 MB

ts.TELE-satellite.com/DTMB/CN/Beijing-Ch59-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 207 MB

www.transponderstream.com/DTMB/CN/Beijing-Ch59-1203.ts

DTMB**CN**

Network Name

65535

Recording

TELE-satellite

Transmitter Chengdu Channel 40

Remark

HDTV

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
1201	0x04B1	H.264 Video	-	10291.69	49.22	CCTV HD T
1001	0x03E9	H.264 Video	-	2605.87	12.46	SCTV 3 T
1309	0x051D	H.264 Video	-	2588.00	12.38	SCTV 5 T
1301	0x0515	H.264 Video	-	2585.77	12.37	SCTV 1 T
8191	0x1FFF	Null Packets	-	1539.50	7.36	N/A
1202	0x04B2	MPEG Audio	-	440.85	2.11	CCTV HD T
1302	0x0516	MPEG Audio	-	189.15	0.90	SCTV 5 T

1002	0x03EA	MPEG Audio	-	189.15	0.90	SCTV 3 T
1310	0x051E	MPEG Audio	-	188.90	0.90	SCTV 1 T
1308	0x051C	PCR	-	50.39	0.24	N/A
1300	0x0514	PCR	-	50.39	0.24	N/A
1200	0x04B0	PCR	-	50.39	0.24	N/A
1000	0x03E8	PCR	-	50.39	0.24	N/A
17	0x0011	SDT	-	18.62	0.09	N/A
259	0x0103	PMT	-	9.93	0.05	SCTV 5 T

258	0x0102	PMT	-	9.93	0.05	SCTV 1 T
16	0x0010	NIT	-	9.93	0.05	N/A
1	0x0001	CAT	-	9.93	0.05	N/A
257	0x0101	PMT	-	9.68	0.05	CCTV HD T
256	0x0100	PMT	-	9.68	0.05	SCTV 3 T
0	0x0000	PAT	-	9.68	0.05	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 85 MB

ts.TELE-satellite.com/DTMB/CN/Chengdu-Ch40-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 807 MB

www.transponderstream.com/DTMB/CN/Chengdu-Ch40-1203.ts



CN

Network Name

1 Recording

TELE-satellite

Transmitter Chengdu Channel 60

Remark

MPEG2 and MPEG4

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
1001	0x03E9	MPEG2 Video	-	2216.28	40.89
1201	0x04B1	H.264 Video	-	888.89	16.40
1101	0x044D	H.264 Video	-	786.84	14.52
1301	0x0515	H.264 Video	-	735.75	13.57
8191	0x1FFF	Null Packets	-	459.00	8.47

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
1002	0x03EA	MPEG Audio	-	138.16	2.55
1202	0x04B2	MPEG Audio	-	69.75	1.29
1102	0x044E	MPEG Audio	-	69.75	1.29
1302	0x0516	MPEG Audio	-	34.84	0.64
1200	0x04B0	PMT	-	3.39	0.06
1	0x0001	CAT	-	3.39	0.06

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
0	0x0000	PAT	-	3.39	0.06
1300	0x0514	PMT	-	3.32	0.06
1100	0x044C	PMT	-	3.32	0.06
1000	0x03E8	PMT	-	3.32	0.06
17	0x0011	SDT	-	0.78	0.01
16	0x0010	NIT	-	0.14	0.00

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 20 MB

ts.TELE-satellite.com/DTMB/CN/Chengdu-Ch60-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 212 MB

www.transponderstream.com/DTMB/CN/Chengdu-Ch60-1203.ts



CN

Network Name

3 Recording

TELE-satellite

Transmitter Chengdu Channel 62

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
8191	0x1FFF	Null Packets	-	1502.52	20.77
1041	0x0411	H.264 Video	-	1043.40	14.42
1171	0x0493	H.264 Video	-	992.28	13.71
1031	0x0407	H.264 Video	-	941.15	13.01
6101	0x17D5	H.264 Video	-	787.79	10.89
6001	0x1771	H.264 Video	-	787.79	10.89
1151	0x047F	H.264 Video	-	736.66	10.18
1172	0x0494	MPEG Audio	-	69.92	0.97

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
1042	0x0412	MPEG Audio	-	69.92	0.97
1032	0x0408	MPEG Audio	-	69.92	0.97
6102	0x17D6	MPEG Audio	-	69.76	0.96
6002	0x1772	MPEG Audio	-	69.76	0.96
1152	0x0480	MPEG Audio	-	34.80	0.48
18	0x0012	EIT	-	18.14	0.25
6000	0x1770	PMT	-	5.11	0.07
1040	0x0410	PMT	-	5.11	0.07
6100	0x17D4	PMT	-	4.95	0.07

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
1170	0x0492	PMT	-	4.95	0.07
1150	0x047E	PMT	-	4.95	0.07
1030	0x0406	PMT	-	4.95	0.07
0	0x0000	PAT	-	4.95	0.07
17	0x0011	SDT	-	3.30	0.05
1	0x0001	CAT	-	3.30	0.05
16	0x0010	NIT	-	0.16	0.00

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 27 MB

ts.TELE-satellite.com/DTMB/CN/Chengdu-Ch62-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 281 MB

www.transponderstream.com/DTMB/CN/Chengdu-Ch62-1203.ts



CN

Network Name

[none]

Recording

TELE-satellite

Transmitter Guangzhou Channel 57

Remark

unqualified descriptor

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
163	0x00A3	MPEG2 Video	-	3079.28	31.92
512	0x0200	MPEG2 Video	-	2772.28	28.74
161	0x00A1	MPEG2 Video	-	1950.78	20.22
8191	0x1FFF	Null Packets	-	1489.94	15.44
650	0x028A	MPEG Audio	-	132.56	1.37

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
85	0x0055	MPEG Audio	-	69.70	0.72
81	0x0051	MPEG Audio	-	69.70	0.72
0	0x0000	PAT	-	16.73	0.17
32	0x0020	PMT	-	15.15	0.16
1027	0x0403	PMT	-	15.05	0.16
1026	0x0402	PMT	-	15.05	0.16

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
1	0x0001	CAT	-	15.05	0.16
17	0x0011	SDT	-	2.97	0.03
16	0x0010	NIT	-	2.97	0.03
20	0x0014	TOT	-	0.20	0.00

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 39 MB

ts.TELE-satellite.com/DTMB/CN/Guangzhou-Ch57-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 372 MB

www.transponderstream.com/DTMB/CN/Guangzhou-Ch57-1110.ts



CN

Network Name

3 Recording

TELE-satellite

Transmitter Shanghai Channel 50

Remark

video descriptor false

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
8191	0x1FFF	Null Packets	-	5683.78	39.37
801	0x0321	MPEG1 Video	\$	2255.69	15.62
817	0x0331	MPEG1 Video	-	1642.36	11.37
834	0x0342	?	\$	1396.46	9.67
865	0x0361	Video	-	1390.71	9.63
849	0x0351	Video	-	1287.93	8.92
818	0x0332	MPEG Audio	-	116.39	0.81
802	0x0322	MPEG Audio	\$	116.39	0.81
866	0x0362	MPEG Audio	-	75.40	0.52

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
850	0x0352	MPEG Audio	-	75.39	0.52
833	0x0341	MPEG Audio	\$	75.34	0.52
864	0x0360	PMT	-	30.08	0.21
848	0x0350	PMT	-	30.08	0.21
832	0x0340	PMT	-	30.08	0.21
816	0x0330	PMT	-	30.08	0.21
800	0x0320	PMT	-	30.08	0.21
17	0x0011	SDT	-	30.08	0.21
1	0x0001	CAT	-	30.08	0.21
0	0x0000	PAT	-	30.08	0.21

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
840	0x0348	ECM/EMM	-	15.14	0.10
838	0x0346	ECM/EMM	-	15.14	0.10
808	0x0328	ECM/EMM	-	15.14	0.10
806	0x0326	ECM/EMM	-	15.14	0.10
20	0x0014	TOT	-	9.91	0.07
55	0x0037	?	-	7.53	0.05
1296	0x0510	ECM/EMM	-	2.34	0.02
21	0x0015	Network Sync	-	1.49	0.01
1280	0x0500	ECM/EMM	-	0.19	0.00

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 57 MB

ts.TELE-satellite.com/DTMB/CN/Shanghai-Ch50-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 552 MB

www.transponderstream.com/DTMB/CN/Shanghai-Ch50-1203.ts



CN

Network Name

臧胰朕漏艇陆路奎艇官朕婆

Recording

TELE-satellite

Transmitter Shenzhen Channel 32

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
101	0x0065	H.264 Video	-	10428.31	50.15
104	0x0068	H.264 Video	-	2405.08	11.57
103	0x0067	H.264 Video	-	2002.94	9.63
102	0x0066	H.264 Video	-	1421.97	6.84
113	0x0071	H.264 Video	-	1351.58	6.50
114	0x0072	H.264 Video	-	1105.19	5.31
8191	0x1FFF	Null Packets	-	687.67	3.31
1001	0x03E9	AC3 Audio	-	459.03	2.21

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
2001	0x07D1	AC3 Audio	-	262.33	1.26
18	0x0012	EIT	-	224.23	1.08
1014	0x03F6	MPEG Audio	-	66.10	0.32
1013	0x03F5	MPEG Audio	-	66.10	0.32
1004	0x03EC	MPEG Audio	-	66.10	0.32
1003	0x03EB	MPEG Audio	-	66.10	0.32
1002	0x03EA	MPEG Audio	-	66.10	0.32
44	0x002C	PMT	-	15.06	0.07
35	0x0023	PMT	-	15.06	0.07

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
33	0x0021	PMT	-	15.06	0.07
45	0x002D	PMT	-	15.02	0.07
34	0x0022	PMT	-	15.02	0.07
32	0x0020	PMT	-	15.02	0.07
0	0x0000	PAT	-	15.02	0.07
17	0x0011	SDT	-	4.55	0.02
20	0x0014	TOT	-	2.60	0.01
21	0x0015	Network Sync	-	1.52	0.01
16	0x0010	NIT	-	1.30	0.01

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 90 MB

ts.TELE-satellite.com/DTMB/CN/Shenzhen-Ch32-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 812 MB

www.transponderstream.com/DTMB/CN/Shenzhen-Ch32-1110.ts

DTMB**CN**

Network Name 臧胰腴漏艇陆路垄艇盲販婆

Recording

TELE-satellite

Transmitter Shenzhen Channel 50

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
108	0x006C	H.264 Video	-	1653.32	17.10	CCTV-NEWS
110	0x006E	H.264 Video	-	1572.80	16.26	SZTV-M2
105	0x0069	H.264 Video	-	1533.57	15.86	SZTV-1
106	0x006A	H.264 Video	-	1517.57	15.69	SZTV-2
107	0x006B	H.264 Video	-	1327.72	13.73	GD
109	0x006D	H.264 Video	-	1176.53	12.17	SZTV-M1
8191	0x1FFF	Null Packets	-	189.67	1.96	N/A
18	0x0012	EIT	-	185.02	1.91	N/A

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
1010	0x03F2	MPEG Audio	-	66.57	0.69	SZTV-M2
1006	0x03EE	MPEG Audio	-	66.57	0.69	SZTV-2
1008	0x03F0	MPEG Audio	-	66.39	0.69	CCTV-NEWS
1007	0x03EF	MPEG Audio	-	66.39	0.69	GD
1005	0x03ED	MPEG Audio	-	66.39	0.69	SZTV-1
1009	0x03F1	MPEG Audio	-	66.20	0.68	SZTV-M1
36	0x0024	PMT	-	15.25	0.16	SZTV-1
41	0x0029	PMT	-	15.06	0.16	SZTV-M2
40	0x0028	PMT	-	15.06	0.16	SZTV-M1

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
39	0x0027	PMT	-	15.06	0.16	CCTV-NEWS
38	0x0026	PMT	-	15.06	0.16	GD
37	0x0025	PMT	-	15.06	0.16	SZTV-2
0	0x0000	PAT	-	15.06	0.16	N/A
17	0x0011	SDT	-	4.65	0.05	N/A
20	0x0014	TOT	-	2.60	0.03	N/A
21	0x0015	Network Sync	-	1.49	0.02	N/A
16	0x0010	NIT	-	1.30	0.01	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 38 MB

ts.TELE-satellite.com/DTMB/CN/Shenzhen-Ch50-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 382 MB

www.transponderstream.com/DTMB/CN/Shenzhen-Ch50-1110.ts

DTMB**CN**

Network Name 臧胰腴漏艇陆路垄艇盲販婆

Recording

TELE-satellite

Transmitter Shenzhen Channel 60

Remark

HD only

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
112	0x0070	H.264 Video	-	11465.37	47.01	CCTV-HD
111	0x006F	H.264 Video	-	10973.21	44.99	CCTV-1 HD
8191	0x1FFF	Null Packets	-	762.57	3.13	N/A
1012	0x03F4	AC3 Audio	-	459.43	1.88	CCTV-HD

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
1011	0x03F3	AC3 Audio	-	459.43	1.88	CCTV-1 HD
18	0x0012	EIT	-	215.68	0.88	N/A
42	0x002A	PMT	-	15.09	0.06	CCTV-1 HD
43	0x002B	PMT	-	15.04	0.06	CCTV-HD
0	0x0000	PAT	-	15.04	0.06	N/A

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
17	0x0011	SDT	-	3.97	0.02	N/A
20	0x0014	TOT	-	2.64	0.01	N/A
16	0x0010	NIT	-	1.32	0.01	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 100 MB

ts.TELE-satellite.com/DTMB/CN/Shenzhen-Ch60-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 950 MB

www.transponderstream.com/DTMB/CN/Shenzhen-Ch60-1110.ts

HK**HongKong****DTMB****HK**

Network Name

[none]

Recording

TELE-satellite

Transmitter HongKong Channel 30

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
111	0x006F	MPEG2 Video	-	5337.54	24.61	Home
811	0x032B	MPEG2 Video	-	5206.29	24.00	Jade
161	0x00A1	MPEG2 Video	-	3701.24	17.06	World
841	0x0349	MPEG2 Video	-	3589.95	16.55	Pearl
8191	0x1FFF	Null Packets	-	1984.21	9.15	N/A
18	0x0012	EIT	-	209.96	0.97	N/A
843	0x034B	AC3 Audio	-	197.76	0.91	Pearl
842	0x034A	AC3 Audio	-	197.70	0.91	Pearl
813	0x032D	AC3 Audio	-	197.70	0.91	Jade

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
812	0x032C	AC3 Audio	-	197.65	0.91	Jade
163	0x00A3	AC3 Audio	-	197.04	0.91	World
112	0x0070	AC3 Audio	-	196.99	0.91	Home
162	0x00A2	AC3 Audio	-	196.93	0.91	World
113	0x0071	AC3 Audio	-	196.93	0.91	Home
840	0x0348	PMT	-	15.06	0.07	Pearl
810	0x032A	PMT	-	15.06	0.07	Jade
160	0x00A0	PMT	-	15.06	0.07	World
110	0x006E	PMT	-	15.06	0.07	Home
0	0x0000	PAT	-	15.06	0.07	N/A

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
17	0x0011	SDT	-	2.97	0.01	N/A
846	0x034E	DVB Subtitles	-	0.77	0.00	Pearl
845	0x034D	DVB Subtitles	-	0.77	0.00	Pearl
817	0x0331	DVB Subtitles	-	0.77	0.00	Jade
816	0x0330	DVB Subtitles	-	0.77	0.00	Jade
815	0x032F	DVB Subtitles	-	0.77	0.00	Jade
16	0x0010	NIT	-	0.27	0.00	N/A
20	0x0014	TOT	-	0.16	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 86 MB

ts.TELE-satellite.com/DTMB/HK/HongKong-Ch30-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 841 MB

www.transponderstream.com/DTMB/HK/HongKong-Ch30-1110.ts

DTMB**HK**

Network Name

MFN_TV3

Recording

TELE-satellite

Transmitter HongKong Channel 35

Remark

MHEG

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
851	0x0353	H.264 Video	-	11970.85	55.26	High Definition Jade
821	0x0335	H.264 Video	-	3698.76	17.07	J2
831	0x033F	H.264 Video	-	2983.64	13.77	iNews
8191	0x1FFF	Null Packets	-	866.69	4.00	N/A
1001	0x03E9	MHEG	-	490.60	2.26	J2
853	0x0355	AC3 Audio	-	423.06	1.95	High Definition Jade
852	0x0354	AC3 Audio	-	235.06	1.09	High Definition Jade
18	0x0012	EIT	-	200.74	0.93	N/A

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
823	0x0337	AC3 Audio	-	197.41	0.91	J2
822	0x0336	AC3 Audio	-	197.41	0.91	J2
832	0x0340	AC3 Audio	-	133.20	0.61	iNews
834	0x0342	AC3 Audio	-	100.73	0.47	iNews
833	0x0341	AC3 Audio	-	100.73	0.47	iNews
850	0x0352	PMT	-	15.04	0.07	High Definition Jade
830	0x033E	PMT	-	15.04	0.07	iNews
820	0x0334	PMT	-	15.04	0.07	J2
0	0x0000	PAT	-	15.04	0.07	N/A

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
21	0x0015	Network Sync	-	1.49	0.01	N/A
17	0x0011	SDT	-	0.95	0.00	N/A
16	0x0010	NIT	-	0.36	0.00	N/A
20	0x0014	TOT	-	0.18	0.00	N/A
857	0x0359	DVB Subtitles	-	0.05	0.00	High Definition Jade
856	0x0358	DVB Subtitles	-	0.05	0.00	High Definition Jade
855	0x0357	DVB Subtitles	-	0.05	0.00	High Definition Jade
825	0x0339	DVB Subtitles	-	0.05	0.00	J2

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 90 MB

ts.TELE-satellite.com/DTMB/HK/HongKong-Ch35-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 844 MB

www.transponderstream.com/DTMB/HK/HongKong-Ch35-1110.ts

DVB-S

satellite

9°E

EUROBIRD



9°E

Network Name

Skylogtic

Recording

Thomas Haring

Transmitter

EUROBIRD 11.823H

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
1701	0x06A5	H.264 Video	-	11406.99	29.99	3D SAT TV
5633	0x1601	MPEG2 Video	\$	3605.94	9.48	Lifestyle
4865	0x1301	MPEG2 Video	\$	3070.46	8.07	TVBN
4609	0x1201	MPEG2 Video	\$	2822.57	7.42	TVBS_Europe
1841	0x0731	MPEG2 Video	\$	2725.62	7.17	S2K
5377	0x1501	MPEG2 Video	\$	2585.26	6.80	TVB_Premium_Drama
1801	0x0709	MPEG2 Video	-	2412.11	6.34	SMtv San Marino
5121	0x1401	MPEG2 Video	\$	2326.55	6.12	TVB_Junior
2001	0x07D1	Data	\$	1691.88	4.45	BCC TV 2
1901	0x076D	Data	\$	1268.79	3.34	BCC TV 1
2201	0x0899	Data	\$	1057.40	2.78	BCC TEST
8191	0x1FFF	Null Packets	-	597.27	1.57	N/A
1550	0x060E	MPEG Audio	-	200.65	0.53	Radio Studio 7
1702	0x06A6	MPEG Audio	-	198.58	0.52	3D SAT TV
1802	0x070A	MPEG Audio	-	137.94	0.36	SMtv San Marino
5890	0x1702	MPEG Audio	\$	135.87	0.36	RTHK
1570	0x0622	MPEG Audio	-	135.87	0.36	Ecoradio
1560	0x0618	MPEG Audio	-	135.87	0.36	Millennium Radio
1540	0x0604	MPEG Audio	-	135.85	0.36	Radio CRC
5635	0x1603	MPEG Audio	\$	132.39	0.35	Lifestyle

5634	0x1602	MPEG Audio	\$	132.39	0.35	Lifestyle
5122	0x1402	MPEG Audio	\$	132.39	0.35	TVB_Junior
4611	0x1203	MPEG Audio	\$	132.39	0.35	TVBS_Europe
5378	0x1502	MPEG Audio	\$	132.36	0.35	TVB_Premium_Drama
4866	0x1302	MPEG Audio	\$	132.36	0.35	TVBN
4610	0x1202	MPEG Audio	\$	132.36	0.35	TVBS_Europe
1843	0x0733	MPEG Audio	\$	98.68	0.26	S2K
1842	0x0732	MPEG Audio	\$	98.66	0.26	S2K
601	0x0259	ECM/EMM	-	15.04	0.04	RTHK
501	0x01F5	ECM/EMM	-	15.04	0.04	Lifestyle
401	0x0191	ECM/EMM	-	15.04	0.04	TVB_Premium_Drama
301	0x012D	ECM/EMM	-	15.04	0.04	TVB_Junior
201	0x00C9	ECM/EMM	-	15.04	0.04	TVBN
101	0x0065	ECM/EMM	-	15.04	0.04	TVBS_Europe
504	0x01F8	ECM/EMM	-	14.88	0.04	BCC TEST
503	0x01F7	ECM/EMM	-	14.88	0.04	BCC TV 1 and 2
502	0x01F6	ECM/EMM	-	14.88	0.04	BCC TV 2
500	0x01F4	ECM/EMM	-	14.88	0.04	BCC TV 1
17	0x0011	SDT	-	10.01	0.03	N/A
240	0x00F0	ECM/EMM	-	5.06	0.01	N/A
5888	0x1700	PMT	-	5.01	0.01	RTHK

5632	0x1600	PMT	-	5.01	0.01	Lifestyle
5376	0x1500	PMT	-	5.01	0.01	TVB_Premium_Drama
5120	0x1400	PMT	-	5.01	0.01	TVB_Junior
4864	0x1300	PMT	-	5.01	0.01	TVBN
4608	0x1200	PMT	-	5.01	0.01	TVBS_Europe
2200	0x0898	PMT	-	5.01	0.01	BCC TEST
2100	0x0834	PMT	-	5.01	0.01	BCC TV 1 and 2
2000	0x07D0	PMT	-	5.01	0.01	BCC TV 2
1900	0x076C	PMT	-	5.01	0.01	BCC TV 1
1800	0x0708	PMT	-	5.01	0.01	SMtv San Marino
1700	0x06A4	PMT	-	5.01	0.01	3D SAT TV
1571	0x0623	PMT	-	5.01	0.01	Ecoradio
1561	0x0619	PMT	-	5.01	0.01	Millennium Radio
1551	0x060F	PMT	-	5.01	0.01	Radio Studio 7
1541	0x0605	PMT	-	5.01	0.01	Radio CRC
32	0x0020	PMT	-	5.01	0.01	S2K
0	0x0000	PAT	-	5.01	0.01	N/A
16	0x0010	NIT	-	3.01	0.01	N/A
1	0x0001	CAT	-	3.01	0.01	N/A
1844	0x0734	Private Data	\$	1.51	0.00	S2K
20	0x0014	TOT	-	0.11	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 145 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-11823H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1429 MB

www.transponderstream.com/DVB-S/009/EUROBIRD-11823H-1111.ts



9°E

Network Name

BSS LIEDEKERKE

Recording

Thomas Haring

Transmitter

EUROBIRD 11.843V

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
2511	0x09CF	H.264 Video	-	8001.68	21.04	TRACE TROPICAL HD
3011	0x0BC3	H.264 Video	-	5134.35	13.50	LUXE TV HD
8191	0x1FFF	Null Packets	-	4596.79	12.09	N/A
2500	0x09C4	MPEG2 Video	\$	4300.86	11.31	EUROSPORT 2 BL
2051	0x0803	MPEG2 Video	-	3992.95	10.50	BSS
711	0x02C7	MPEG2 Video	-	3468.58	9.12	MESOPOTAMIA TV
701	0x02BD	MPEG2 Video	-	3205.81	8.43	ROJ TV
411	0x019B	MPEG2 Video	-	3055.43	8.04	NEWROZ TV
2512	0x09D0	MPEG Audio	-	198.49	0.52	TRACE TROPICAL HD
3014	0x0BC6	MPEG Audio	-	165.32	0.43	LUXE TV HD
2503	0x09C7	MPEG Audio	-	164.53	0.43	EUROSPORT 2 BL
3018	0x0BCA	MPEG Audio	-	132.62	0.35	LUXE TV HD
3017	0x0BC9	MPEG Audio	-	132.62	0.35	LUXE TV HD
3016	0x0BC8	MPEG Audio	-	132.62	0.35	LUXE TV HD

3015	0x0BC7	MPEG Audio	-	132.62	0.35	LUXE TV HD
3013	0x0BC5	MPEG Audio	-	132.62	0.35	LUXE TV HD
2504	0x09C8	MPEG Audio	-	132.33	0.35	EUROSPORT 2 BL
768	0x0300	MPEG Audio	-	118.39	0.31	DENG RADIO
2052	0x0804	MPEG Audio	-	116.40	0.31	BSS
712	0x02C8	MPEG Audio	-	116.40	0.31	MESOPOTAMIA TV
702	0x02BE	MPEG Audio	-	116.40	0.31	ROJ TV
412	0x019C	MPEG Audio	-	116.40	0.31	NEWROZ TV
2502	0x09C6	MPEG Audio	\$	100.29	0.26	EUROSPORT 2 BL
2501	0x09C5	MPEG Audio	\$	100.29	0.26	EUROSPORT 2 BL
2508	0x09CC	Teletext	-	75.22	0.20	EUROSPORT 2 BL
33	0x0021	ECM/EMM	-	15.83	0.04	EUROSPORT 2 BL
32	0x0020	ECM/EMM	-	15.83	0.04	EUROSPORT 2 BL
18	0x0012	EIT	-	12.66	0.03	N/A
500	0x01F4	PMT	-	6.34	0.02	EUROSPORT 2 BL

3010	0x0BC2	PMT	-	3.17	0.01	LUXE TV HD
2510	0x09CE	PMT	-	3.17	0.01	TRACE TROPICAL HD
704	0x02C0	PMT	-	3.17	0.01	DENG RADIO
410	0x019A	PMT	-	3.17	0.01	NEWROZ TV
0	0x0000	PAT	-	3.17	0.01	N/A
2050	0x0802	PMT	-	3.16	0.01	BSS
710	0x02C6	PMT	-	3.16	0.01	MESOPOTAMIA TV
700	0x02BC	PMT	-	3.16	0.01	ROJ TV
1	0x0001	CAT	-	3.16	0.01	N/A
17	0x0011	SDT	-	1.58	0.00	N/A
2509	0x09CD	Private Sections	-	1.51	0.00	N/A
16	0x0010	NIT	-	0.32	0.00	N/A
20	0x0014	TOT	-	0.19	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 148 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-11843V-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1431 MB

www.transponderstream.com/DVB-S/009/EUROBIRD-11843V-1111.ts



9°E

Network Name

E.B.9 NMX

Recording

Thomas Haring

Transmitter

EUROBIRD 11.919V

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
8191	0x1FFF	Null Packets	-	9324.02	17.51	N/A
2010	0x07DA	H.264 Video	\$	8202.59	15.40	National Geographic HD
2011	0x07DB	H.264 Video	\$	8002.47	15.03	FOX HD
2001	0x07D1	H.264 Video	-	7302.32	13.71	FTV HD
2007	0x07D7	H.264 Video	\$	6567.28	12.33	MEZZO HD
2002	0x07D2	H.264 Video	\$	5414.85	10.17	iConcerts
2006	0x07D6	H.264 Video	\$	4501.45	8.45	Duck TV HD
3006	0x0BBE	MPEG Audio	\$	397.01	0.75	Duck TV HD
3001	0x0BB9	MPEG Audio	-	397.01	0.75	FTV HD
5011	0x1393	AC3 Audio	\$	394.92	0.74	FOX HD
4010	0x0FAA	AC3 Audio	\$	394.92	0.74	National Geographic HD
3010	0x0BC2	AC3 Audio	\$	394.92	0.74	National Geographic HD
3007	0x0BBF	MPEG Audio	\$	266.41	0.50	MEZZO HD
3002	0x0BBA	MPEG Audio	\$	266.41	0.50	iConcerts
502	0x01F6	ECM/EMM	-	211.56	0.40	N/A
3011	0x0BC3	MPEG Audio	\$	198.51	0.37	FOX HD

4011	0x0FAB	MPEG Audio	\$	198.50	0.37	FOX HD
1000	0x03E8	ECM/EMM	-	98.30	0.18	N/A
18	0x0012	EIT	-	85.39	0.16	N/A
501	0x01F5	ECM/EMM	-	78.33	0.15	N/A
4001	0x0FA1	MPEG Audio	-	73.14	0.14	FTV HD
16	0x0010	NIT	-	25.08	0.05	N/A
1	0x0001	CAT	-	25.06	0.05	N/A
0	0x0000	PAT	-	25.06	0.05	N/A
1011	0x03F3	PMT	-	24.26	0.05	FOX HD
1010	0x03F2	PMT	-	24.26	0.05	National Geographic HD
1008	0x03F0	PMT	-	24.26	0.05	Penthouse HD
1007	0x03EF	PMT	-	24.26	0.05	MEZZO HD
1006	0x03EE	PMT	-	24.26	0.05	Duck TV HD
1002	0x03EA	PMT	-	24.26	0.05	iConcerts
1001	0x03E9	PMT	-	24.26	0.05	FTV HD
116	0x0074	ECM/EMM	-	15.10	0.03	MEZZO HD
132	0x0084	ECM/EMM	-	15.09	0.03	MEZZO HD

119	0x0077	ECM/EMM	-	15.09	0.03	National Geographic HD
121	0x0079	ECM/EMM	-	15.07	0.03	National Geographic HD
118	0x0076	ECM/EMM	-	15.07	0.03	FOX HD
117	0x0075	ECM/EMM	-	15.07	0.03	MEZZO HD
112	0x0070	ECM/EMM	-	15.07	0.03	Duck TV HD
108	0x006C	ECM/EMM	-	15.07	0.03	Duck TV HD
131	0x0083	ECM/EMM	-	15.05	0.03	iConcerts
114	0x0072	ECM/EMM	-	15.05	0.03	Penthouse HD
133	0x0085	ECM/EMM	-	15.04	0.03	Penthouse HD
120	0x0078	ECM/EMM	-	15.04	0.03	FOX HD
115	0x0073	ECM/EMM	-	15.04	0.03	Penthouse HD
100	0x0064	ECM/EMM	-	7.57	0.01	MEZZO HD
101	0x0065	ECM/EMM	-	7.55	0.01	MEZZO HD
103	0x0067	ECM/EMM	-	7.53	0.01	iConcerts
102	0x0066	ECM/EMM	-	7.53	0.01	iConcerts
17	0x0011	SDT	-	6.02	0.01	N/A
20	0x0014	TOT	-	0.13	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 148 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-11919V-111



9°E

Network Name

E.B.9 NMX

Recording

Thomas Haring

Transmitter

EUROBIRD 11.938H

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name	1102	0x044E	MPEG Audio	-	132.36	0.35	PTV	1570	0x0622	PMT	-	7.91	0.02	RFI Bucarest
4331	0x10EB	MPEG2 Video	\$	4105.59	10.79	RAI Africa	1101	0x044D	MPEG Audio	\$	132.36	0.35	Walf TV	1569	0x0621	PMT	-	7.91	0.02	RFI Lisbonne
1026	0x0402	MPEG2 Video	\$	3659.23	9.62	Disney Channel ME	1321	0x0529	MPEG Audio	-	132.33	0.35	Ayngaran TV	1568	0x0620	PMT	-	7.91	0.02	RFI Sofia
1011	0x03F3	MPEG1 Video	-	2862.23	7.53	CCTV9 DOCUMENTARY	1109	0x0455	MPEG Audio	-	132.33	0.35	Africa 7	1567	0x061F	PMT	-	7.91	0.02	RFI Bakou
1005	0x03ED	MPEG2 Video	-	2759.03	7.25	NET 25 INTERNATIONAL	1103	0x044F	MPEG Audio	-	132.33	0.35	JSTV	1566	0x061E	PMT	-	7.91	0.02	RFI Tbilisi
1003	0x03EB	MPEG2 Video	-	2327.30	6.12	JSTV	1111	0x0457	MPEG Audio	-	131.57	0.35	CCTV9 DOCUMENTARY	1565	0x061D	PMT	-	7.91	0.02	RFI Prague
1004	0x03EC	MPEG2 Video	\$	2215.43	5.82	TFM Senegal	1605	0x0645	MPEG Audio	-	69.66	0.18	RFI Divers 1	1564	0x061C	PMT	-	7.91	0.02	RFI Germany
1221	0x04C5	MPEG2 Video	-	2105.53	5.54	Ayngaran TV	8190	0x1FFE	PCR	-	44.25	0.12	CCTV9 DOCUMENTARY	1563	0x061B	PMT	-	7.91	0.02	RFI Rmc Mo
1231	0x04CF	MPEG2 Video	-	1941.20	5.10	Jaya TV	1029	0x0405	PCR	-	39.37	0.10	N/A	1562	0x061A	PMT	-	7.91	0.02	RFI Music
1211	0x04BB	MPEG2 Video	-	1649.68	4.34	Touba Medias	18	0x0012	EIT	-	25.40	0.07	N/A	1561	0x0619	PMT	-	7.91	0.02	RFI Divers 4
1002	0x03EA	MPEG2 Video	-	1498.68	3.94	PTV	8000	0x1F40	ECM/EMM	-	15.83	0.04	RAI Africa	1560	0x0618	PMT	-	7.91	0.02	RFI Divers 3
1007	0x03EF	MPEG2 Video	-	1437.95	3.78	YAARL TV	1511	0x05E7	ECM/EMM	-	15.83	0.04	Walf TV	1559	0x0617	PMT	-	7.91	0.02	RFI Latine
601	0x0259	Data	-	1426.52	3.75	PMI Streaming W3	971	0x03CB	ECM/EMM	-	15.83	0.04	TFM Senegal	1558	0x0616	PMT	-	7.91	0.02	RFI Divers 7
1001	0x03E9	MPEG2 Video	\$	1390.50	3.66	Walf TV	961	0x03C1	ECM/EMM	-	15.83	0.04	Walf TV	1557	0x0615	PMT	-	7.91	0.02	RFI Divers 2
1008	0x03F0	MPEG2 Video	-	1159.79	3.05	KURD1	126	0x007E	PMT	-	15.83	0.04	Disney Channel ME	1556	0x0614	PMT	-	7.91	0.02	RFI Divers 1
8191	0x1FFF	Null Packets	-	1027.15	2.70	N/A	0	0x0000	PAT	-	15.83	0.04	N/A	1555	0x0613	PMT	-	7.91	0.02	RFI Africa
1009	0x03F1	MPEG2 Video	-	926.76	2.44	Africa 7	17	0x0011	SDT	-	15.71	0.04	N/A	1554	0x0612	PMT	-	7.91	0.02	RFI Langues Div
600	0x0259	Data	-	200.91	0.53	PMI File W3	1130	0x046A	DVB Subtitles	-	13.73	0.04	Disney Channel ME	1553	0x0611	PMT	-	7.91	0.02	RFI Langues Est
1154	0x0482	MPEG Audio	\$	200.65	0.53	RFM	500	0x01F4	PMT	-	7.94	0.02	PMI File W3	1552	0x0610	PMT	-	7.91	0.02	RFI Français
1127	0x0467	MPEG Audio	\$	198.55	0.52	Disney Channel ME	111	0x006F	PMT	-	7.94	0.02	CCTV9 DOCUMENTARY	1551	0x060F	PMT	-	7.91	0.02	PMI Streaming W3
1129	0x0469	MPEG Audio	\$	198.52	0.52	Disney Channel ME	102	0x0066	PMT	-	7.94	0.02	PTV	501	0x01F5	PMT	-	7.91	0.02	Walf 2
4332	0x10EC	MPEG Audio	\$	196.81	0.52	RAI Africa	1599	0x063F	PMT	-	7.91	0.02	RFI Test	151	0x0097	PMT	-	7.91	0.02	Walf 1
1128	0x0468	MPEG Audio	\$	196.81	0.52	Disney Channel ME	1592	0x0638	PMT	-	7.91	0.02	RFI Skopje	150	0x0096	PMT	-	7.91	0.02	Jaya TV
1126	0x0466	MPEG Audio	\$	196.81	0.52	Disney Channel ME	1591	0x0637	PMT	-	7.91	0.02	RFI Anik	123	0x007B	PMT	-	7.91	0.02	Ayngaran TV
1150	0x047E	MPEG Audio	\$	135.88	0.36	Walf 1	1589	0x0635	PMT	-	7.91	0.02	RFI Barcelona	122	0x007A	PMT	-	7.91	0.02	Touba Medias
1612	0x064C	MPEG Audio	-	135.85	0.36	RFI Music	1588	0x0634	PMT	-	7.91	0.02	RFI Ordinspace	121	0x0079	PMT	-	7.91	0.02	RFM
1611	0x064B	MPEG Audio	-	135.85	0.36	RFI Divers 4	1587	0x0633	PMT	-	7.91	0.02	RFI Hispasat2	114	0x0072	PMT	-	7.91	0.02	Africa 7
1610	0x064A	MPEG Audio	-	135.85	0.36	RFI Divers 3	1586	0x0632	PMT	-	7.91	0.02	RFI Hispasat1	109	0x006D	PMT	-	7.91	0.02	RFI Rmc Amman
1609	0x0649	MPEG Audio	-	135.85	0.36	RFI Hispasat1	1585	0x0631	PMT	-	7.91	0.02	RFI Orbit	108	0x006C	PMT	-	7.91	0.02	RFI Austria
1606	0x0646	MPEG Audio	-	135.85	0.36	RFI Divers 2	1584	0x0630	PMT	-	7.91	0.02	RFI M Orient	107	0x006B	PMT	-	7.91	0.02	RFI Multilingue
1604	0x0644	MPEG Audio	-	135.85	0.36	RFI Test	1583	0x062F	PMT	-	7.91	0.02	RFI Ekaterinbourg	106	0x006A	PMT	-	7.91	0.02	RFI Liban
1603	0x0643	MPEG Audio	-	135.85	0.36	RFI Erevan	1582	0x062E	PMT	-	7.91	0.02	RFI Montenegro	105	0x0069	PMT	-	7.91	0.02	RFI Kosovo
1601	0x0641	MPEG Audio	-	135.85	0.36	RFI Skopje	1581	0x062D	PMT	-	7.91	0.02	RFI Albania	104	0x0068	PMT	-	7.91	0.02	RFI Chisinau
1151	0x047F	MPEG Audio	\$	135.85	0.36	Walf 2	1580	0x062C	PMT	-	7.91	0.02	RFI Ocean Indien	101	0x0065	PMT	-	7.91	0.02	RFI Erevan
1608	0x0648	MPEG Audio	-	135.82	0.36	RFI Rmc Amman	1579	0x062B	PMT	-	7.91	0.02	RFI Russia	35	0x0023	PMT	-	7.91	0.02	RFI Astra 4
1607	0x0647	MPEG Audio	-	135.82	0.36	RFI Divers 7	1578	0x062A	PMT	-	7.91	0.02	N/A	32	0x0020	PMT	-	7.91	0.02	N/A
1602	0x0642	MPEG Audio	-	135.82	0.36	RFI Langues Est	1577	0x0629	PMT	-	7.91	0.02	N/A	1	0x0001	CAT	-	7.91	0.02	N/A
1331	0x0533	MPEG Audio	-	132.39	0.35	Jaya TV	1576	0x0628	PMT	-	7.91	0.02	RFI Hispasat1	1199	0x04AF	ECM/EMM	-	5.09	0.01	Disney Channel ME
1107	0x0453	MPEG Audio	-	132.39	0.35	YAARL TV	1575	0x0627	PMT	-	7.91	0.02	RFI Hispasat2	1132	0x046C	DVB Subtitles	-	3.00	0.01	Disney Channel ME
1311	0x051F	MPEG Audio	-	132.36	0.35	Touba Medias	1574	0x0626	PMT	-	7.91	0.02	RFI Hispasat1	1131	0x046B	DVB Subtitles	-	3.00	0.01	Disney Channel ME
1108	0x0454	MPEG Audio	-	132.36	0.35	KURD1	1573	0x0625	PMT	-	7.91	0.02	RFI Hispasat1	16	0x0010	NIT	-	0.64	0.00	N/A
1105	0x0451	MPEG Audio	-	132.36	0.35	NET 25 INTERNATIONAL	1572	0x0624	PMT	-	7.91	0.02	RFI Hispasat1	1226	0x04CA	ECM/EMM	-	0.61	0.00	N/A
1104	0x0450	MPEG Audio	\$	132.36	0.35	TFM Senegal	1571	0x0623	PMT	-	7.91	0.02	RFI Hispasat1	20	0x0014	TOT	-	0.06	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 144 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-11938H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1428 MB

www.transponderstream.com/DVB-S/009/EUROBIRD-11938H-1111.ts



9°E

Network Name

eVision

Recording

Thomas Haring

Transmitter

EUROBIRD 11.958V

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name	110	0x006E	Teletext	-	187.86	0.49	m2	954	0x03BA	PMT	-	24.27	0.06	MR2 Petofi
1100	0x044C	H.264 Video	-	11924.11	31.36	m2 HD	981	0x03D5	MPEG Audio	-	137.92	0.36	MR5 Parlament	922	0x039A	PMT	-	24.27	0.06	Katolikus Radio-TESZT
1200	0x04B0	H.264 Video	-	7482.59	19.68	Duna 2 HD	965	0x03C5	MPEG Audio	-	137.92	0.36	MR4 Nemzetsegi	906	0x038A	PMT	-	24.27	0.06	MR3 Bartok
200	0x00C8	MPEG2 Video	-	4035.00	10.61	m2	917	0x0395	MPEG Audio	-	137.91	0.36	Katolikus Radio-TESZT	1198	0x04AE	PMT	-	24.26	0.06	Duna 2 HD
500	0x01F4	MPEG2 Video	\$	3462.61	9.11	m1	501	0x01F5	MPEG Audio	\$	135.83	0.36	m1	938	0x03AA	PMT	-	24.26	0.06	MR1 Kossuth
8191	0x1FFF	Null Packets	-	2392.17	6.29	N/A	201	0x00C9	MPEG Audio	-	135.83	0.36	m2	502	0x01F6	PMT	-	24.26	0.06	m1
300	0x012C	MPEG2 Video	-	2355.44	6.19	Duna	401	0x0191	MPEG Audio	-	135.82	0.36	Duna 2	406	0x0196	PMT	-	24.26	0.06	Duna 2
400	0x0190	MPEG2 Video	-	1751.01	4.60	Duna 2	301	0x012D	MPEG Audio	-	135.82	0.36	Duna	306	0x0132	PMT	-	24.26	0.06	Duna
1202	0x04B2	AC3 Audio	-	394.93	1.04	Duna 2 HD	304	0x0130	Private PES	-	37.63	0.10	Duna	202	0x00CA	PMT	-	24.26	0.06	m2
1102	0x044E	AC3 Audio	-	394.93	1.04	m2 HD	504	0x01F8	Private PES	-	37.61	0.10	m1	2986	0x0BAA	ECM/EMM	-	22.16	0.06	N/A
901	0x0385	MPEG Audio	-	275.83	0.73	MR3 Bartok	404	0x0194	Private PES	-	37.61	0.10	Duna 2	2816	0x0B0A	ECM/EMM	-	20.22	0.05	N/A
949	0x0385	MPEG Audio	-	275.81	0.73	MR2 Petofi	204	0x00CC	Private PES	-	37.61	0.10	m2	511	0x01FF	ECM/EMM	-	14.96	0.04	m1
1201	0x04B1	MPEG Audio	-	271.65	0.71	Duna 2 HD	16	0x0010	NIT	-	25.08	0.07	N/A	934	0x03A6	Private PES	-	5.72	0.02	MR1 Kossuth
1101	0x04AD	MPEG Audio	-	271.65	0.71	m2 HD	1	0x0001	CAT	-	25.07	0.07	N/A	982	0x03D6	Private PES	-	4.18	0.01	MR5 Parlament
933	0x03A5	MPEG Audio	-	200.60	0.53	MR1 Kossuth	0	0x0000	PAT	-	25.07	0.07	N/A	966	0x03C6	Private PES	-	4.18	0.01	MR4 Nemzetsegi
18	0x0012	EIT	-	200.08	0.53	N/A	17	0x0011	SDT	-	25.04	0.07	N/A	950	0x03B6	Private PES	-	4.18	0.01	MR2 Petofi
311	0x0137	Teletext	-	192.86	0.51	Duna	1098	0x044A	PMT	-	24.27	0.06	m2 HD	902	0x03B6	Private PES	-	4.18	0.01	MR3 Bartok
503	0x01F7	Teletext	-	189.17	0.50	m1	986	0x03DA	PMT	-	24.27	0.06	MR5 Parlament	20	0x0014	TOT	-	2.99	0.01	N/A
111	0x006F	Teletext	-	187.86	0.49	m2 HD	970	0x03CA	PMT	-	24.27	0.06	MR4 Nemzetsegi							



9°E

Network Name

Euro TV

Recording

Thomas Haring

Transmitter EUROBIRD 12.092H

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	4405	0x1135	MPEG Audio	-	73.16	0.19	Muscam 5	34	0x0022	PMT	-	22.59	0.06	Muscam 4
8191	0x1FFF	Null Packets	-	28231.85	74.21	N/A	4404	0x1134	MPEG Audio	-	73.16	0.19	Muscam 4	33	0x0021	PMT	-	22.59	0.06	Muscam 5
4208	0x1070	MPEG2 Video	\$	2871.65	7.55	IBERALIA	4402	0x1132	MPEG Audio	-	73.16	0.19	Muscam 2	32	0x0020	PMT	-	22.59	0.06	Muscam 6
4144	0x1030	MPEG2 Video	-	2871.63	7.55	PARLAMENTO	4401	0x1131	MPEG Audio	-	73.16	0.19	Muscam 1	16	0x0010	NIT	-	22.59	0.06	N/A
4260	0x10A4	MPEG2 Video	-	2814.07	7.40	REAL MADRID TV	17	0x0011	SDT	-	22.61	0.06	N/A	1	0x0001	CAT	-	22.59	0.06	N/A
4261	0x10A5	MPEG Audio	-	137.98	0.36	REAL MADRID TV	45	0x002D	PMT	-	22.59	0.06	IBERALIA	0	0x0000	PAT	-	22.59	0.06	N/A
4145	0x1031	MPEG Audio	-	135.86	0.36	PARLAMENTO	39	0x0027	PMT	-	22.59	0.06	PARLAMENTO	194	0x00C2	ECM/EMM	-	16.04	0.04	N/A
4209	0x1071	MPEG Audio	\$	125.45	0.33	IBERALIA	38	0x0026	PMT	-	22.59	0.06	REAL MADRID TV	514	0x0202	ECM/EMM	-	7.52	0.02	IBERALIA
4400	0x1130	ECM/EMM	-	98.37	0.26	N/A	37	0x0025	PMT	-	22.59	0.06	Muscam 1	20	0x0014	TOT	-	0.43	0.00	N/A
4406	0x1136	MPEG Audio	-	73.18	0.19	Muscam 6	36	0x0024	PMT	-	22.59	0.06	Muscam 2							
4403	0x1133	MPEG Audio	-	73.18	0.19	Muscam 3	35	0x0023	PMT	-	22.59	0.06	Muscam 3							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 146 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-12092H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1428 MB

www.transponderstream.com/DVB-S/009/EUROBIRD-12092H-1111.ts



9°E

Network Name

AFN Eurobird 9A

Recording

Thomas Haring

Transmitter EUROBIRD 12.418V

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	AFN Eurobird 9A	Recording	Thomas Haring
8191	0x1FFF	Null Packets	-	3900.20	10.25	N/A	1300 0x0514 MPEG Audio	\$ 125.39 0.33	AFN Freedom	5010 0x1392 PMT - 15.05 0.04 Movie Channel
510	0x01FE	MPEG2 Video	\$	2836.36	7.46	News	1002 0x03EA MPEG Audio	- 125.39 0.33	Movie Channel	5009 0x1391 PMT - 15.05 0.04 Family Channel
910	0x038E	MPEG2 Video	\$	2800.37	7.36	Family Channel	1000 0x03E8 MPEG Audio	\$ 125.39 0.33	Movie Channel	5008 0x1390 PMT - 15.05 0.04 Pentagon Channel
810	0x032A	MPEG2 Video	-	2621.95	6.89	Pentagon Channel	900 0x0384 MPEG Audio	\$ 125.39 0.33	Family Channel	5006 0x138E PMT - 15.05 0.04 AFN Xtra
210	0x00D2	MPEG2 Video	\$	2498.79	6.57	AFN Vicenza / Livorno	700 0x02BC MPEG Audio	\$ 125.39 0.33	AFN Rota	5005 0x138D PMT - 15.05 0.04 News
1310	0x051E	MPEG2 Video	\$	2393.11	6.29	AFN Freedom	600 0x0258 MPEG Audio	\$ 125.39 0.33	AFN Xtra	1 0x0001 CAT - 15.05 0.04 N/A
610	0x0262	MPEG2 Video	\$	2382.07	6.26	AFN Xtra	509 0x01FD MPEG Audio	\$ 125.39 0.33	News	0 0x0000 PAT - 15.05 0.04 N/A
1010	0x03F2	MPEG2 Video	\$	2326.88	6.12	Movie Channel	400 0x0190 MPEG Audio	\$ 125.39 0.33	AFN Sigonella	6262 0x1876 ECM/EMM - 14.88 0.04 AFN Freedom Radio
410	0x019A	MPEG2 Video	\$	2299.75	6.05	AFN Sigonella	300 0x012C MPEG Audio	\$ 125.39 0.33	AFN Naples	6223 0x184F ECM/EMM - 14.88 0.04 AFN Power Net - Livorno 107FM
110	0x006E	MPEG2 Video	\$	2267.42	5.96	AFN Aviano	200 0x00C8 MPEG Audio	\$ 125.39 0.33	AFN Vicenza / Livorno	6222 0x184E ECM/EMM - 14.88 0.04 AFN The Eagle - Livorno 106FM
710	0x02C6	MPEG2 Video	\$	2242.15	5.90	AFN Rota	100 0x0064 MPEG Audio	\$ 125.39 0.33	AFN Aviano	6203 0x183B ECM/EMM - 14.88 0.04 AFN Power Net - Sigonella 107FM
310	0x0136	MPEG2 Video	\$	1882.06	4.95	AFN Naples	800 0x0320 MPEG Audio	- 109.72 0.29	Pentagon Channel	6202 0x183A ECM/EMM - 14.88 0.04 AFN The Eagle - Sigonella 105FM
1061	0x0425	Private Data	-	1679.74	4.42	News	506 0x01FA MPEG Audio	\$ 109.72 0.29	News	6183 0x1827 ECM/EMM - 14.88 0.04 AFN Power Net - Naples 107FM
902	0x0386	MPEG Audio	\$	266.48	0.70	Family Channel	5026 0x13A2 PMT	- 15.07 0.04	AFN Freedom	6182 0x1826 ECM/EMM - 14.88 0.04 AFN The Eagle - Naples 106FM
904	0x0388	PCR	\$	172.42	0.45	N/A	5262 0x148E PMT	- 15.05 0.04	AFN Freedom Radio	6164 0x1814 ECM/EMM - 14.88 0.04 AFN The Eagle - Naples 105FM
706	0x02C2	MPEG Audio	\$	172.42	0.45	AFN Rota	5223 0x1467 PMT	- 15.05 0.04	AFN Power Net - Livorno 107FM	6163 0x1813 ECM/EMM - 14.88 0.04 AFN Rota Power Net
1304	0x0518	MPEG Audio	\$	141.09	0.37	AFN Freedom	5222 0x1466 PMT	- 15.05 0.04	AFN The Eagle - Livorno 106FM	6162 0x1812 ECM/EMM - 14.88 0.04 AFN The Eagle - Sigonella 107FM
202	0x00CA	MPEG Audio	\$	141.09	0.37	AFN Vicenza / Livorno	5203 0x1453 PMT	- 15.05 0.04	AFN Power Net - Sigonella 107FM	6143 0x17FF ECM/EMM - 14.88 0.04 AFN Power Net - Vicenza 107FM
106	0x006A	MPEG Audio	\$	141.09	0.37	AFN Aviano	5202 0x1452 PMT	- 15.05 0.04	AFN The Eagle - Sigonella 105FM	6142 0x17FE ECM/EMM - 14.88 0.04 AFN The Eagle - Vicenza 106FM
1306	0x051A	MPEG Audio	\$	141.07	0.37	AFN Freedom	5183 0x143F PMT	- 15.05 0.04	AFN Power Net - Naples 107FM	6123 0x17EB ECM/EMM - 14.88 0.04 AFN Aviano 107FM
1302	0x0516	MPEG Audio	\$	141.07	0.37	AFN Freedom	5182 0x143E PMT	- 15.05 0.04	AFN The Eagle - Naples 106FM	6122 0x17EA ECM/EMM - 14.88 0.04 AFN Aviano 106FM
1006	0x03EE	MPEG Audio	-	141.07	0.37	AFNS Audio Test Signal	5164 0x142C PMT	- 15.05 0.04	AFN The Eagle - Sigonella 107FM	6042 0x179A ECM/EMM - 14.88 0.04 AFN Power Net - Vicenza 107FM
804	0x032A	MPEG Audio	-	141.07	0.37	Pentagon Channel	5163 0x142B PMT	- 15.05 0.04	AFN Rota Power Net	6041 0x1799 ECM/EMM - 14.88 0.04 AFN The Eagle - Livorno 105FM
802	0x0322	MPEG Audio	-	141.07	0.37	Pentagon Channel	5162 0x142A PMT	- 15.05 0.04	AFN The Eagle - Sigonella 107FM	6026 0x178A ECM/EMM - 14.88 0.04 AFN Freedom
704	0x02C0	MPEG Audio	\$	141.07	0.37	AFN Rota	5143 0x1417 PMT	- 15.05 0.04	AFN Power Net - Vicenza 107FM	6020 0x1784 ECM/EMM - 14.88 0.04 AFN Sigonella
702	0x02BE	MPEG Audio	\$	141.07	0.37	AFN Rota	5142 0x1416 PMT	- 15.05 0.04	AFN The Eagle - Vicenza 106FM	6018 0x1782 ECM/EMM - 14.88 0.04 AFN Naples
602	0x025A	MPEG Audio	\$	141.07	0.37	AFN Xtra	5123 0x1403 PMT	- 15.05 0.04	AFN Aviano 107FM	6014 0x177E ECM/EMM - 14.88 0.04 AFN Vicenza / Livorno
504	0x01F8	MPEG Audio	\$	141.07	0.37	News	5122 0x1402 PMT	- 15.05 0.04	AFN Aviano 106FM	6012 0x177C ECM/EMM - 14.88 0.04 AFN Aviano
502	0x01F6	MPEG Audio	\$	141.07	0.37	News	5062 0x13C6 PMT	- 15.05 0.04	AFNS Audio Test Signal	6010 0x177A ECM/EMM - 14.88 0.04 Movie Channel
404	0x0194	MPEG Audio	\$	141.07	0.37	AFN Sigonella	5043 0x13B3 PMT	- 15.05 0.04	AFN PowerTalk	6009 0x1779 ECM/EMM - 14.88 0.04 Family Channel
402	0x0192	MPEG Audio	\$	141.07	0.37	AFN Sigonella	5042 0x13B2 PMT	- 15.05 0.04	AFN Power Net - Vicenza 107FM	6006 0x1776 ECM/EMM - 14.88 0.04 AFN Xtra
304	0x0130	MPEG Audio	\$	141.07	0.37	AFN Naples	5041 0x13B1 PMT	- 15.05 0.04	AFN The Eagle - Sigonella 106 FM	6005 0x1775 ECM/EMM - 14.88 0.04 News
302	0x012E	MPEG Audio	\$	141.07	0.37	AFN Naples	5020 0x139C PMT	- 15.05 0.04	AFN Sigonella	6016 0x1780 ECM/EMM - 14.86 0.04 AFN Rota
204	0x00CC	MPEG Audio	\$	141.07	0.37	AFN Vicenza / Livorno	5018 0x139A PMT	- 15.05 0.04	AFN Naples	18 0x0012 EIT - 10.03 0.03 N/A
104	0x0068	MPEG Audio	\$	141.07	0.37	AFN Aviano	5016 0x1398 PMT	- 15.05 0.04	AFN Rota	17 0x0011 SDT - 5.02 0.01 N/A
102	0x0066	MPEG Audio	\$	141.07	0.37	AFN Aviano	5014 0x1396 PMT	- 15.05 0.04	AFN Vicenza / Livorno	16 0x0010 NIT - 3.01 0.01 N/A
							5012 0x1394 PMT	- 15.05 0.04	AFN Aviano	20 0x0014 TOT - 0.15 0.00 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 148 MB

ts.TELE-satellite.com/DVB-S/009/EUROBIRD-12418V-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1428 MB

www.transponderstream.com/DVB-S/009/EUROBIRD-12418V-1111.ts

19°E

ASTRA



19°E

Network Name

ASTRA1

Recording

Thomas Haring

Transmitter ASTRA 11.023H

Remark

3D side-by-side

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	ASTRA1	Recording	Thomas Haring
8191	0x1FFF	Null Packets	-	13188.42	38.98	N/A	2062 0x080E MPEG Audio	- 138.13 0.41	Radio Beograd	34 0x0022 PMT - 18.85 0.06 3D Tile Format
33	0x0021	H.264 Video	-	8188.04	24.20	ASTRA 3D demo	2052 0x0804 MPEG Audio	- 137.98 0.41	RTS SAT	32 0x0020 PMT - 18.85 0.06 ASTRA 3D demo
2091	0x082B	MPEG2 Video	-	6173.50	18.25	ASTRA Caption	641 0x0281 MPEG Audio	- 131.63 0.39	AB Channel	5220 0x1464 PMT - 18.77 0.06 AB Channel
2051	0x0803	MPEG2 Video	-	3547.00	10.48	RTS SAT	1701 0x06A5 PCR	- 42.72 0.13	N/A	1 0x0001 CAT - 3.77 0.01 N/A
640	0x0280	MPEG2 Video	-	1430.39	4.23	AB Channel	1301 0x0515 PCR	- 42.72 0.13	N/A	0 0x0000 PAT - 3.77 0.01 N/A
36	0x0024	Private Data	-	459.99	1.36	ASTRA 3D demo	2060 0x080C PMT	- 18.85 0.06	Radio Beograd	16 0x0010 NIT - 2.00 0.01 N/A
642	0x0282	Teletext	-	225.71	0.67	AB Channel	2050 0x0802 PMT	- 18.85 0.06	RTS SAT	17 0x0011 SDT - 1.77 0.01 N/A
							1112 0x0458 PMT	- 18.85 0.06	ASTRA Caption	20 0x0014 TOT - 0.15 0.00 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 130 MB

ts.TELE-satellite.com/DVB-S/019/ASTRA-11023H-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1272 MB

www.transponderstream.com/DVB-S/019/ASTRA-11023H-1110.ts

23.5°E

ASTRA



23.5°E

Network Name

Skylink

Recording

Thomas Haring

Transmitter

ASTRA 11.798H

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name	3206	0x0C86	Teletext	-	37.62	0.10	NGC	2803	0x0AF3	PMT	-	8.60	0.02	History channel
2720	0x0AA0	MPEG2 Video	\$	4166.89	10.96	TV JOJ	3281	0x0CD1	Private PES	-	37.60	0.10	JOJ PLUS	2801	0x0AF1	PMT	-	8.60	0.02	JOJ PLUS
2721	0x0AA1	MPEG2 Video	\$	3218.99	8.47	JOJ PLUS	3131	0x0C3B	Private PES	-	37.60	0.10	Sport 2	2008	0x07D8	PMT	-	8.60	0.02	HBO Comedy
2728	0x0AA8	MPEG2 Video	\$	3078.58	8.10	NG Wild	2603	0x0A2B	DVB Subtitles	-	36.01	0.09	History channel	2007	0x07D7	PMT	-	8.60	0.02	TV Paprika
2727	0x0AA7	MPEG2 Video	\$	2480.98	6.52	Discovery	16	0x0010	NIT	-	34.40	0.09	N/A	2006	0x07D6	PMT	-	8.60	0.02	Sport 2
2723	0x0AA3	MPEG2 Video	\$	2328.28	6.12	History channel	3383	0x0D37	DVB Subtitles	-	28.23	0.07	History channel	1	0x0001	CAT	-	8.60	0.02	N/A
2729	0x0AA9	MPEG2 Video	-	2281.81	6.00	Fashion TV	17	0x0011	SDT	-	18.32	0.05	N/A	0	0x0000	PAT	-	8.60	0.02	N/A
2016	0x07E0	H.264 Video	\$	2200.72	5.79	Sport 2	418	0x01A2	ECM/EMM	-	15.05	0.04	NG Wild	2815	0x0AFF	PMT	-	8.59	0.02	History channel DUT
2722	0x0AA2	MPEG2 Video	-	2195.87	5.78	TA3	408	0x0198	ECM/EMM	-	15.05	0.04	NG Wild	2813	0x0AFD	PMT	-	8.59	0.02	duck tv
2018	0x07E2	H.264 Video	\$	2097.76	5.52	HBO Comedy	348	0x015C	ECM/EMM	-	15.05	0.04	NG Wild	2809	0x0AF9	PMT	-	8.59	0.02	Fashion TV
2732	0x0AAC	MPEG2 Video	-	2058.70	5.41	tv8	328	0x0148	ECM/EMM	-	15.05	0.04	NG Wild	2802	0x0AF2	PMT	-	8.59	0.02	TA3
2017	0x07E1	H.264 Video	\$	1778.14	4.68	TV Paprika	308	0x0134	ECM/EMM	-	15.05	0.04	NG Wild	2800	0x0AF0	PMT	-	8.59	0.02	TV JOJ
2726	0x0AA6	MPEG2 Video	\$	1707.02	4.49	NGC	198	0x00C6	ECM/EMM	-	15.05	0.04	NG Wild	2010	0x07DA	PMT	-	8.59	0.02	NG Wild BG
8191	0x1FFF	Null Packets	-	1648.86	4.34	N/A	196	0x00C4	ECM/EMM	-	15.05	0.04	NGC	2009	0x07D9	PMT	-	8.59	0.02	History channel BG
2733	0x0AAD	MPEG2 Video	\$	866.99	2.28	duck tv	191	0x00B8	ECM/EMM	-	15.05	0.04	JOJ PLUS	3368	0x0D28	ECM/EMM	-	7.52	0.02	NG Wild
2892	0x0B4C	MPEG Audio	-	266.38	0.70	tv8	190	0x00BE	ECM/EMM	-	15.05	0.04	TV JOJ	3371	0x0D2B	ECM/EMM	-	7.35	0.02	duck tv
3280	0x0CD0	Teletext	-	263.26	0.69	TV JOJ	178	0x00B2	ECM/EMM	-	15.05	0.04	NG Wild	3363	0x0D23	ECM/EMM	-	7.35	0.02	History channel
3200	0x0C80	Teletext	-	263.26	0.69	TV JOJ	176	0x00B0	ECM/EMM	-	15.05	0.04	NGC	2848	0x0B20	ECM/EMM	-	5.02	0.01	NG Wild
18	0x0012	EIT	-	242.25	0.64	N/A	171	0x00AB	ECM/EMM	-	15.05	0.04	JOJ PLUS	2846	0x0B1E	ECM/EMM	-	5.02	0.01	NGC
3053	0x0BED	MPEG Audio	\$	203.72	0.54	duck tv	170	0x00AA	ECM/EMM	-	15.05	0.04	TV JOJ	2841	0x0B19	ECM/EMM	-	5.02	0.01	JOJ PLUS
2882	0x0B42	MPEG Audio	-	203.72	0.54	TA3	148	0x0094	ECM/EMM	-	15.05	0.04	NG Wild	2840	0x0B18	ECM/EMM	-	5.02	0.01	TV JOJ
2880	0x0B40	MPEG Audio	\$	203.72	0.54	TV JOJ	146	0x0092	ECM/EMM	-	15.05	0.04	NGC	268	0x010C	ECM/EMM	-	5.02	0.01	NG Wild
2038	0x07F6	MPEG Audio	\$	203.72	0.54	HBO Comedy	141	0x008D	ECM/EMM	-	15.05	0.04	JOJ PLUS	266	0x010A	ECM/EMM	-	5.02	0.01	NGC
2028	0x07EC	MPEG Audio	\$	203.72	0.54	HBO Comedy	140	0x008C	ECM/EMM	-	15.05	0.04	TV JOJ	261	0x0105	ECM/EMM	-	5.02	0.01	JOJ PLUS
2026	0x07EA	MPEG Audio	\$	203.72	0.54	Sport 2	183	0x00B7	ECM/EMM	-	14.89	0.04	duck tv	260	0x0104	ECM/EMM	-	5.02	0.01	TV JOJ
3046	0x0BE6	MPEG Audio	\$	203.70	0.54	NGC	177	0x00B1	ECM/EMM	-	14.89	0.04	Discovery	248	0x00F8	ECM/EMM	-	5.02	0.01	NG Wild
2889	0x0B49	MPEG Audio	-	203.70	0.54	Fashion TV	147	0x0093	ECM/EMM	-	14.89	0.04	Discovery	246	0x00F6	ECM/EMM	-	5.02	0.01	NGC
2881	0x0B41	MPEG Audio	\$	203.70	0.54	JOJ PLUS	2333	0x091D	ECM/EMM	-	14.88	0.04	History channel	241	0x00F1	ECM/EMM	-	5.02	0.01	JOJ PLUS
101	0x0065	ECM/EMM	-	197.55	0.52	N/A	2323	0x0913	ECM/EMM	-	14.88	0.04	History channel	240	0x00F0	ECM/EMM	-	5.02	0.01	TV JOJ
2047	0x07FF	MPEG Audio	\$	141.02	0.37	TV Paprika	361	0x0169	ECM/EMM	-	14.88	0.04	duck tv	2268	0x08DC	ECM/EMM	-	4.96	0.01	HBO Comedy
2027	0x07EB	MPEG Audio	\$	141.02	0.37	TV Paprika	331	0x014B	ECM/EMM	-	14.88	0.04	duck tv	2267	0x08DB	ECM/EMM	-	4.96	0.01	TV Paprika
102	0x0066	ECM/EMM	-	140.01	0.37	N/A	323	0x0143	ECM/EMM	-	14.88	0.04	History channel	2266	0x08DA	ECM/EMM	-	4.96	0.01	Sport 2
2967	0x0B97	MPEG Audio	\$	133.20	0.35	Discovery	311	0x0137	ECM/EMM	-	14.88	0.04	duck tv	2258	0x08D2	ECM/EMM	-	4.96	0.01	HBO Comedy
2887	0x0B47	MPEG Audio	\$	133.20	0.35	Discovery	173	0x00AD	ECM/EMM	-	14.88	0.04	History channel	2257	0x08D1	ECM/EMM	-	4.96	0.01	TV Paprika
2538	0x09EA	MPEG Audio	\$	133.20	0.35	NG Wild	153	0x0099	ECM/EMM	-	14.88	0.04	duck tv	2256	0x08D0	ECM/EMM	-	4.96	0.01	Sport 2
2528	0x09E0	MPEG Audio	\$	133.20	0.35	NG Wild	143	0x008F	ECM/EMM	-	14.88	0.04	History channel	273	0x0111	ECM/EMM	-	4.96	0.01	duck tv
2966	0x0B96	MPEG Audio	\$	133.19	0.35	NGC	2598	0x0A26	DVB Subtitles	-	11.34	0.03	NG Wild	267	0x010B	ECM/EMM	-	4.96	0.01	Discovery
2963	0x0B93	MPEG Audio	\$	133.19	0.35	History channel	2814	0x0AFE	?	-	8.60	0.02	N/A	263	0x0107	ECM/EMM	-	4.96	0.01	History channel
2886	0x0B46	MPEG Audio	\$	133.19	0.35	NGC	2812	0x0AFC	PMT	-	8.60	0.02	tv8	253	0x00FD	ECM/EMM	-	4.96	0.01	duck tv
2883	0x0B43	MPEG Audio	\$	133.19	0.35	History channel	2811	0x0AFB	PMT	-	8.60	0.02	duck tv DUT	247	0x00F7	ECM/EMM	-	4.96	0.01	Discovery
103	0x0067	ECM/EMM	-	120.95	0.32	N/A	2808	0x0AF8	PMT	-	8.60	0.02	NG Wild	243	0x00F3	ECM/EMM	-	4.96	0.01	History channel
2558	0x09FE	MPEG Audio	\$	87.74	0.23	NG Wild	2807	0x0AF7	PMT	-	8.60	0.02	Discovery	3286	0x0CD6	DVB Subtitles	-	3.02	0.01	NGC
3208	0x0C88	Teletext	-	75.22	0.20	NG Wild	2806	0x0AF6	PMT	-	8.60	0.02	NGC	105	0x0069	?	-	2.04	0.01	N/A
104	0x0068	ECM/EMM	-	72.50	0.19	N/A	2804	0x0AF4	PMT	-	8.60	0.02	NG Wild DUT							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 145 MB

ts.TELE-satellite.com/DVB-S/023/ASTRA-11798H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1430 MB

www.transponderstream.com/DVB-S/023/ASTRA-11798H-1111.ts





23.5°E

Network Name

Skylink

Recording

Thomas Haring

Transmitter

ASTRA 12.110H

Remark

HDTV

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name	103	0x0067	ECM/EMM	-	124.52	0.21	N/A	3005	0x0BBD	PMT	-	8.66	0.01	Eurosport HD BG
3515	0x0DBB	H.264 Video	\$	8760.98	14.61	Spektrum HD	104	0x0068	ECM/EMM	-	62.01	0.10	N/A	0	0x0000	PAT	-	8.66	0.01	N/A
4003	0x0FA3	H.264 Video	\$	8466.02	14.12	FILMBOX HD	16	0x0010	NIT	-	34.66	0.06	N/A	4099	0x1003	PMT	-	8.54	0.01	Muzika CS
4008	0x0FA8	H.264 Video	\$	6212.31	10.36	Travel Channel HD CE	4482	0x1182	DVB Subtitles	-	25.25	0.04	HISTORY HD	4088	0x0FF8	PMT	-	8.54	0.01	Travel Channel HD CE
3514	0x0DBA	H.264 Video	\$	5308.37	8.85	Markiza HD	17	0x0011	SDT	-	18.20	0.03	N/A	4087	0x0FF7	PMT	-	8.54	0.01	HBO HD
4007	0x0FA7	H.264 Video	\$	4755.34	7.93	HBO HD	4082	0x0FF2	PMT	-	17.33	0.03	HISTORY HD	3504	0x0DB0	PMT	-	8.54	0.01	Markiza HD
4001	0x0FA1	H.264 Video	\$	4417.19	7.37	EUROSPORT HD	4081	0x0FF1	PMT	-	17.33	0.03	EUROSPORT HD	3004	0x0BBC	PMT	-	8.54	0.01	Travel Channel HD EE
4002	0x0FA2	H.264 Video	\$	3658.44	6.10	HISTORY HD	3838	0x0EFE	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	3002	0x0BBA	PMT	-	8.54	0.01	Film Europe
8191	0x1FFF	Null Packets	-	2582.58	4.31	N/A	3832	0x0EF8	ECM/EMM	-	14.98	0.02	HISTORY HD	3001	0x0BB9	PMT	-	8.54	0.01	HBO Comedy
3011	0x0BC3	H.264 Video	\$	2109.51	3.52	HBO Comedy	3831	0x0EF7	ECM/EMM	-	14.98	0.02	EUROSPORT HD	1	0x0001	CAT	-	8.54	0.01	N/A
4019	0x0FB3	H.264 Video	\$	2047.25	3.41	Muzika CS	3828	0x0EF4	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	3668	0x0E54	DVB Subtitles	-	8.05	0.01	Travel Channel HD WE
4006	0x0FA6	H.264 Video	\$	1512.91	2.52	Doku CS	3822	0x0EEE	ECM/EMM	-	14.98	0.02	HISTORY HD	3688	0x0E68	DVB Subtitles	-	7.80	0.01	Travel Channel HD WE
3012	0x0BC4	H.264 Video	\$	1174.51	1.96	Film Europe	3821	0x0EED	ECM/EMM	-	14.98	0.02	EUROSPORT HD	3818	0x0EEA	ECM/EMM	-	7.43	0.01	Travel Channel HD CE
4018	0x0FB2	H.264 Video	\$	583.36	0.97	Kino CS	3788	0x0ECC	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	392	0x0188	ECM/EMM	-	7.43	0.01	HISTORY HD
4243	0x1093	AC3 Audio	\$	459.08	0.77	FILMBOX HD	3778	0x0EC2	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	391	0x0187	ECM/EMM	-	7.43	0.01	EUROSPORT HD
4163	0x1043	AC3 Audio	\$	458.71	0.76	FILMBOX HD	372	0x0174	ECM/EMM	-	14.98	0.02	HISTORY HD	262	0x0106	ECM/EMM	-	5.07	0.01	HISTORY HD
4247	0x1097	AC3 Audio	\$	394.23	0.66	HBO HD	371	0x0173	ECM/EMM	-	14.98	0.02	EUROSPORT HD	261	0x0105	ECM/EMM	-	5.07	0.01	EUROSPORT HD
4241	0x1091	AC3 Audio	\$	394.23	0.66	EUROSPORT HD	192	0x00C0	ECM/EMM	-	14.98	0.02	HISTORY HD	242	0x00F2	ECM/EMM	-	5.07	0.01	HISTORY HD
4167	0x1047	AC3 Audio	\$	394.10	0.66	HBO HD	191	0x00BF	ECM/EMM	-	14.98	0.02	EUROSPORT HD	241	0x00F1	ECM/EMM	-	5.07	0.01	EUROSPORT HD
4322	0x10E2	MPEG Audio	\$	271.94	0.45	HISTORY HD	189	0x00BD	ECM/EMM	-	14.98	0.02	Muzika CS	3765	0x0EB5	ECM/EMM	-	4.95	0.01	Spektrum HD
4162	0x1042	AC3 Audio	\$	264.76	0.44	HISTORY HD	182	0x00B6	ECM/EMM	-	14.98	0.02	HISTORY HD	3764	0x0EB4	ECM/EMM	-	4.95	0.01	Markiza HD
5148	0x141C	MPEG Audio	\$	203.98	0.34	Travel Channel HD EE	181	0x00B5	ECM/EMM	-	14.98	0.02	EUROSPORT HD	3755	0x0EAB	ECM/EMM	-	4.95	0.01	Spektrum HD
5068	0x13CC	MPEG Audio	\$	203.98	0.34	Travel Channel HD EE	179	0x00B3	ECM/EMM	-	14.98	0.02	Muzika CS	3754	0x0EAA	ECM/EMM	-	4.95	0.01	Markiza HD
5058	0x13C2	MPEG Audio	\$	203.98	0.34	Travel Channel HD EE	172	0x00AC	ECM/EMM	-	14.98	0.02	HISTORY HD	3262	0x0CBE	ECM/EMM	-	4.95	0.01	Film Europe
4641	0x1221	MPEG Audio	\$	203.98	0.34	EUROSPORT HD	171	0x00AB	ECM/EMM	-	14.98	0.02	EUROSPORT HD	3261	0x0CBD	ECM/EMM	-	4.95	0.01	HBO Comedy
4328	0x10E8	MPEG Audio	\$	203.98	0.34	Travel Channel HD CE	168	0x00A8	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	3252	0x0CB4	ECM/EMM	-	4.95	0.01	Film Europe
4323	0x10E3	MPEG Audio	\$	203.98	0.34	FILMBOX HD	162	0x00A2	ECM/EMM	-	14.98	0.02	HISTORY HD	3251	0x0CB3	ECM/EMM	-	4.95	0.01	HBO Comedy
4248	0x1098	MPEG Audio	\$	203.98	0.34	Travel Channel HD CE	161	0x00A1	ECM/EMM	-	14.98	0.02	EUROSPORT HD	279	0x0117	ECM/EMM	-	4.95	0.01	Muzika CS
4242	0x1092	MPEG Audio	\$	203.98	0.34	HISTORY HD	148	0x0094	ECM/EMM	-	14.98	0.02	Travel Channel HD CE	278	0x0116	ECM/EMM	-	4.95	0.01	Kino CS
4168	0x1048	MPEG Audio	\$	203.98	0.34	Travel Channel HD CE	188	0x00BC	ECM/EMM	-	14.85	0.02	Kino CS	268	0x010C	ECM/EMM	-	4.95	0.01	Travel Channel HD CE
3545	0x0DD9	MPEG Audio	\$	203.98	0.34	Spektrum HD	178	0x00B2	ECM/EMM	-	14.85	0.02	Kino CS	267	0x010B	ECM/EMM	-	4.95	0.01	HBO HD
3524	0x0DC6	MPEG Audio	\$	203.98	0.34	Markiza HD	177	0x00B1	ECM/EMM	-	14.85	0.02	HBO HD	266	0x010A	ECM/EMM	-	4.95	0.01	Doku CS
3535	0x0DC5	MPEG Audio	\$	203.98	0.34	Spektrum HD	176	0x00B0	ECM/EMM	-	14.85	0.02	Doku CS	263	0x0107	ECM/EMM	-	4.95	0.01	FILMBOX HD
3524	0x0DC4	MPEG Audio	\$	203.98	0.34	Markiza HD	173	0x00AD	ECM/EMM	-	14.85	0.02	FILMBOX HD	259	0x0103	ECM/EMM	-	4.95	0.01	Muzika CS
4179	0x1053	MPEG Audio	\$	203.86	0.34	Muzika CS	167	0x00A7	ECM/EMM	-	14.85	0.02	HBO HD	258	0x0102	ECM/EMM	-	4.95	0.01	Kino CS
4161	0x1041	MPEG Audio	\$	203.86	0.34	EUROSPORT HD	166	0x00A6	ECM/EMM	-	14.85	0.02	Doku CS	248	0x00F8	ECM/EMM	-	4.95	0.01	Travel Channel HD CE
3581	0x0DFD	MPEG Audio	\$	203.86	0.34	Eurosport HD BG	163	0x00A3	ECM/EMM	-	14.85	0.02	FILMBOX HD	247	0x00F7	ECM/EMM	-	4.95	0.01	HBO HD
3038	0x0BD7	MPEG Audio	\$	203.86	0.34	HBO Comedy	4098	0x1002	PMT	-	8.66	0.01	Kino CS	246	0x00F6	ECM/EMM	-	4.95	0.01	Doku CS
3021	0x0BCD	MPEG Audio	\$	203.86	0.34	HBO Comedy	4096	0x1000	PMT	-	8.66	0.01	Travel Channel HD WE	243	0x00F3	ECM/EMM	-	4.95	0.01	FILMBOX HD
101	0x0065	ECM/EMM	-	197.79	0.33	N/A	4089	0x0FF9	PMT	-	8.66	0.01	Eurosport HD DUT	4818	0x12D2	DVB Subtitles	-	3.47	0.01	Travel Channel HD CE
3022	0x0BCE	MPEG Audio	\$	197.05	0.33	Film Europe	4086	0x0FF6	PMT	-	8.66	0.01	Doku CS	3698	0x0E72	DVB Subtitles	-	3.47	0.01	Travel Channel HD CE
18	0x0012	EIT	-	184.18	0.31	N/A	4083	0x0FF3	PMT	-	8.66	0.01	FILMBOX HD	3678	0x0E5E	DVB Subtitles	-	3.47	0.01	Travel Channel HD CE
4166	0x1046	MPEG Audio	\$	141.23	0.24	Doku CS	4080	0x0FF0	PMT	-	8.66	0.01	HISTORY HD DUT	20	0x0014	TOT	-	0.25	0.00	N/A
4178	0x1052	MPEG Audio	\$	141.10	0.24	Kino CS	3505	0x0DB1	PMT	-	8.66	0.01	Spektrum HD							
102	0x0066	ECM/EMM	-	139.87	0.23	N/A	3007	0x0BBF	PMT	-	8.66	0.01	HISTORY HD BG							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 229 MB

ts.TELE-satellite.com/DVB-S/023/ASTRA-12110H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 2251 MB

www.transponderstream.com/DVB-S/023/ASTRA-12110H-1111.ts



23.5°E

Network Name

CS Link

Recording

Thomas Haring

Transmitter

ASTRA 12.525H

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name	96	0x0060	MPEG Audio	\$	198.46	0.52	CT 2	1795	0x0703	ECM/EMM	-	15.06	0.04	Prima TV
166	0x00A6	MPEG2 Video	\$	5868.69	15.44	CT 4	288	0x0120	ECM/EMM	-	197.84	0.52	N/A	1794	0x0702	ECM/EMM	-	15.06	0.04	CT 2
165	0x00A5	MPEG2 Video	-	4758.20	12.51	CT 24	201	0x00C9	ECM/EMM	-	194.46	0.51	N/A	1793	0x0701	ECM/EMM	-	15.06	0.04	CT 1 JM
162	0x00A2	MPEG2 Video	\$	4588.26	12.07	CT 1 JM	52	0x0034	Teletext	-	150.43	0.40	CT 24	1631	0x06F5	ECM/EMM	-	15.06	0.04	CT 4
161	0x00A1	MPEG2 Video	\$	4254.41	11.19	Prima TV	32	0x0020	Teletext	-	150.41	0.40	CT 4	1620	0x0654	ECM/EMM	-	15.06	0.04	CT 2
163	0x00A3	MPEG2 Video	\$	3900.06	10.26	CT 2	272	0x0110	ECM/EMM	-	140.09	0.37	N/A	1619	0x0653	ECM/EMM	-	15.06	0.04	CT 1 JM
167	0x00A7	MPEG2 Video	-	3271.70	8.61	Noe TV	85	0x0055	MPEG Audio	\$	135.80	0.36	Prima TV	1617	0x0651	ECM/EMM	-	15.06	0.04	CT 4
8191	0x1FFF	Null Packets	-	3179.57	8.36	N/A	274	0x0112	ECM/EMM	-	124.06	0.33	N/A	1616	0x0650	ECM/EMM	-	15.06	0.04	Prima TV
18	0x0012	EIT	-	533.59	1.40	N/A	273	0x0111	ECM/EMM	-	70.67	0.19	N/A	1553	0x0611	ECM/EMM	-	15.06	0.04	CT 4
90	0x005A	AC3 Audio	\$	460.66	1.21	CT 1	55	0x0037	Teletext	-	37.60	0.10	Noe TV	1552	0x0610	ECM/EMM	-	15.06	0.04	CT 2
184	0x00B8	MPEG Audio	-	275.78	0.73	CRo D-dur	16	0x0010	NIT	-	25.10	0.07	N/A	1551	0x060F	ECM/EMM	-	15.06	0.04	CT 1 JM
92	0x005C	MPEG Audio	\$	271.61	0.71	CT 2	1	0x0001	CAT	-	25.08	0.07	N/A	1538	0x0602	ECM/EMM	-	15.06	0.04	Prima TV
102	0x0066	MPEG Audio	\$	271.59	0.71	CT 4	0	0x0000	PAT	-	25.08	0.07	N/A	209	0x00D1	Private Data	-	8.93	0.02	CRo 1 - Radiozurnal
88	0x0058	MPEG Audio	\$	271.59	0.71	CT 1 JM	17	0x0011	SDT	-	25.05	0.07	N/A	211	0x00D3	Private Data	-	7.70	0.02	CRo 3 - Vltava
43	0x002B	Teletext	-	225.64	0.59	CT 2	1050	0x041A	PMT	-	24.27	0.06	CRo Radio Wave	41	0x0029	ECM/EMM	-	6.79	0.02	N/A
40	0x0028	Teletext	-	225.64	0.59	CT 1 JM	1049	0x0419	PMT	-	24.27	0.06	CRo Leonardo	3847	0x0F07	ECM/EMM	-	5.03	0.01	Prima TV
37	0x0025	Teletext	-	225.64	0.59	Prima TV	1048	0x0418	PMT	-	24.27	0.06	CRo D-dur	3846	0x0F06	ECM/EMM	-	5.03	0.01	Prima TV
180	0x00B4	MPEG Audio	-	208.92	0.55	Proglas	1047	0x0417	PMT	-	24.27	0.06	BBC CZ	3845	0x0F05	ECM/EMM	-	5.03	0.01	CT 4
186	0x00B4	MPEG Audio	-	200.57	0.53	Radio Cesko	1046	0x0416	PMT	-	24.27	0.06	CRo Region	3844	0x0F04	ECM/EMM	-	5.03	0.01	CT 4
181	0x00B5	MPEG Audio	-	200.57	0.53	CRo 2-6/CRo 7	1045	0x0415	PMT	-	24.27	0.06	CRo 2-6/CRo 7	3840	0x0F00	ECM/EMM	-	5.03	0.01	CT 1 JM
179	0x00B3	MPEG Audio	-	200.57	0.53	CRo 3 - Vltava	1044	0x0414	PMT	-	24.27	0.06	Proglas	39	0x0027	ECM/EMM	-	5.03	0.01	Prima TV
178	0x00B2	MPEG Audio	-	200.57	0.53	CRo 2 - Praha	1043	0x0413	PMT	-	24.27	0.06	CRo 3 - Vltava	38	0x0026	ECM/EMM	-	5.03	0.01	CT 1 JM
187	0x00BB	MPEG Audio	-	200.55	0.53	CRo Radio Wave	1042	0x0412	PMT	-	24.27	0.06	CRo 2 - Praha	34	0x0022	ECM/EMM	-	5.03	0.01	CT 4
185	0x00B9	MPEG Audio	-	200.55	0.53	CRo Leonardo	1041	0x0411	PMT	-	24.27	0.06	CRo 1 - Radiozurnal	3843	0x0F03	ECM/EMM	-	5.01	0.01	CT 2
183	0x00B7	MPEG Audio	-	200.55	0.53	BBC CZ	1040	0x0410	PMT	-	24.27	0.06	Radio Cesko	3842	0x0F02	ECM/EMM	-	5.01	0.01	CT 2
182	0x00B6	MPEG Audio	-	200.55	0.53	CRo Region	1031	0x0407	PMT	-	24.27	0.06	Noe TV	3841	0x0F01	ECM/EMM	-	5.01	0.01	CT 1 JM
177	0x00B1	MPEG Audio	-	200.55	0.53	CRo 1 - Radiozurnal	1030	0x0406	PMT	-	24.27	0.06	CT 4	36	0x0024	ECM/EMM	-	5.01	0.01	CT 2
100	0x0064	MPEG Audio	-	198.48	0.52	CT 24	1029	0x0405	PMT	-	24.27	0.06	CT 24	212	0x00D4	Private Data	-	4.33	0.01	CRo Region
93	0x005D	MPEG Audio	\$	198.48	0.52	CT 2	1027	0x0403	PMT	-	24.27	0.06	CT 2	210	0x00D2	Private Data	-	4.18	0.01	CRo 2 - Praha
91	0x005B	MPEG Audio	-	198.48	0.52	CT 1	1026	0x0402	PMT	-	24.27	0.06	CT 1	20	0x0014	TOT	-	3.03	0.01	N/A
89	0x0059	MPEG Audio	\$	198.48	0.52	CT 1	1025	0x0401	PMT	-	24.27	0.06	Prima TV	950	0x03B6	Private Sections	-	1.51	0.00	N/A
84	0x0054	MPEG Audio	\$	198.48	0.52	Prima TV	1028	0x0404	PMT	-	21.49	0.06	CT 1 SM							
106	0x006A	MPEG Audio	-	198.46	0.52	Noe TV	1024	0x0400	PMT	-	21.49	0.06	CT 1 JM							

108°E

TELKOM 1



108°E

Network Name

Network1

Recording

Vincent Witjhu

Transmitter

TELKOM 1 3.620H

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
111	0x006F	MPEG2 Video	\$ 3628.16	9.78	GlobalTV
120	0x0078	MPEG2 Video	\$ 2637.51	7.11	Goal TV 2
126	0x007E	MPEG2 Video	\$ 2616.85	7.05	Disney Junior
135	0x0087	MPEG2 Video	\$ 2400.74	6.47	NG Adventure
117	0x0075	MPEG2 Video	\$ 2368.70	6.39	AXN Beyond
129	0x0081	MPEG2 Video	\$ 2305.45	6.22	FOX Channel
138	0x008A	MPEG2 Video	\$ 2286.72	6.16	Alif TV
102	0x006E	MPEG2 Video	\$ 2103.35	5.67	Metro TV
96	0x0060	MPEG2 Video	\$ 1935.93	5.22	RCTI
141	0x008D	MPEG2 Video	\$ 1858.81	5.01	B Channel
123	0x007B	MPEG2 Video	\$ 1745.07	4.70	FOXCrime
105	0x0069	MPEG2 Video	\$ 1671.97	4.51	Indosiar
132	0x0084	MPEG2 Video	\$ 1656.86	4.47	MGM
108	0x006C	MPEG2 Video	\$ 1488.05	4.01	ANTV
99	0x0063	MPEG2 Video	\$ 1398.03	3.77	Bali TV
114	0x0072	MPEG2 Video	\$ 1336.16	3.60	SCTV
34	0x0022	MPEG Audio	- 181.15	0.49	Trial Radio
32	0x0020	MPEG Audio	\$ 181.15	0.49	Trial Radio JAK FM
769	0x0301	ECM/EMM	- 141.90	0.38	N/A
18	0x0012	EIT	- 141.76	0.38	N/A
109	0x006D	MPEG Audio	\$ 136.21	0.37	ANTV
142	0x008E	MPEG Audio	\$ 135.93	0.37	B Channel
139	0x008B	MPEG Audio	\$ 135.93	0.37	Alif TV
136	0x0088	MPEG Audio	\$ 135.93	0.37	NG Adventure
133	0x0085	MPEG Audio	\$ 135.93	0.37	MGM
130	0x0082	MPEG Audio	\$ 135.93	0.37	FOX Channel

124	0x007C	MPEG Audio	\$ 135.93	0.37	FOXCrime
121	0x0079	MPEG Audio	\$ 135.93	0.37	Goal TV 2
115	0x0073	MPEG Audio	\$ 135.93	0.37	SCTV
112	0x0070	MPEG Audio	\$ 135.93	0.37	GlobalTV
106	0x006A	MPEG Audio	\$ 135.93	0.37	Indosiar
103	0x0067	MPEG Audio	\$ 135.93	0.37	Metro TV
100	0x0064	MPEG Audio	\$ 135.93	0.37	Bali TV
97	0x0061	MPEG Audio	\$ 135.93	0.37	RCTI
127	0x007F	MPEG Audio	\$ 135.79	0.37	Disney Junior
118	0x0076	MPEG Audio	\$ 135.79	0.37	AXN Beyond
1024	0x0400	Private Data	- 97.23	0.26	_Service 9990
143	0x008F	PMT	- 30.10	0.08	B Channel
140	0x008C	PMT	- 30.10	0.08	Alif TV
137	0x0089	PMT	- 30.10	0.08	NG Adventure
134	0x0086	PMT	- 30.10	0.08	MGM
131	0x0083	PMT	- 30.10	0.08	FOX Channel
128	0x0080	PMT	- 30.10	0.08	Disney Junior
125	0x007D	PMT	- 30.10	0.08	FOXCrime
122	0x007A	PMT	- 30.10	0.08	Goal TV 2
119	0x0077	PMT	- 30.10	0.08	AXN Beyond
116	0x0074	PMT	- 30.10	0.08	SCTV
113	0x0071	PMT	- 30.10	0.08	GlobalTV
110	0x006E	PMT	- 30.10	0.08	ANTV
107	0x006B	PMT	- 30.10	0.08	Indosiar
104	0x0068	PMT	- 30.10	0.08	Metro TV
101	0x0065	PMT	- 30.10	0.08	Bali TV
98	0x0062	PMT	- 30.10	0.08	RCTI

37	0x0025	PMT	-	30.10	0.08	_Service 9990
35	0x0023	PMT	-	30.10	0.08	Trial Radio
33	0x0021	PMT	-	30.10	0.08	Trial Radio JAK FM
1	0x0001	CAT	-	30.10	0.08	N/A
0	0x0000	PAT	-	30.10	0.08	N/A
17	0x0011	SDT	-	17.34	0.05	N/A
2307	0x0903	ECM/EMM	-	4.99	0.01	Trial Radio JAK FM
1046	0x0416	ECM/EMM	-	4.99	0.01	B Channel
1045	0x0415	ECM/EMM	-	4.99	0.01	Alif TV
1044	0x0414	ECM/EMM	-	4.99	0.01	NG Adventure
1043	0x0413	ECM/EMM	-	4.99	0.01	MGM
1042	0x0412	ECM/EMM	-	4.99	0.01	FOX Channel
1041	0x0411	ECM/EMM	-	4.99	0.01	Disney Junior
1040	0x0410	ECM/EMM	-	4.99	0.01	FOXCrime
1033	0x0409	ECM/EMM	-	4.99	0.01	Goal TV 2
1032	0x0408	ECM/EMM	-	4.99	0.01	AXN Beyond
1031	0x0407	ECM/EMM	-	4.99	0.01	SCTV
1030	0x0406	ECM/EMM	-	4.99	0.01	GlobalTV
1029	0x0405	ECM/EMM	-	4.99	0.01	ANTV
1028	0x0404	ECM/EMM	-	4.99	0.01	Indosiar
1027	0x0403	ECM/EMM	-	4.99	0.01	Metro TV
1026	0x0402	ECM/EMM	-	4.99	0.01	Bali TV
1025	0x0401	ECM/EMM	-	4.99	0.01	RCTI
16	0x0010	NIT	-	3.88	0.01	N/A
20	0x0014	TOT	-	0.14	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 11 MB

ts.TELE-satellite.com/DVB-S/108/TELKOM-3620H-1110.ts



108°E

Network Name

Tandberg

Recording

Vincent Witjhu

Transmitter

TELKOM 1 3.990H

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
512	0x0200	MPEG2 Video	- 7771.55	94.56	TRANS7-JKT
256	0x0100	MPEG Audio	- 395.86	4.82	TRANS7-JKT
890	0x1FFE	PCR	- 39.45	0.48	N/A

32	0x0020	PMT	- 3.89	0.05	TRANS7-JKT
0	0x0000	PAT	- 3.75	0.05	N/A
18	0x0012	EIT	- 1.81	0.02	N/A
17	0x0011	SDT	- 0.97	0.01	N/A

1	0x0001	CAT	-	0.83	0.01	N/A
20	0x0014	TOT	-	0.14	0.00	N/A
16	0x0010	NIT	-	0.14	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 11 MB

ts.TELE-satellite.com/DVB-S/108/TELKOM-3990H-1109.ts



108°E

Network Name

TransTV

Recording

Vincent Witjhu

Transmitter

TELKOM 1 4.015H

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
257	0x0101	MPEG2 Video	- 7576.75	93.64	antv
258	0x0102	MPEG Audio	- 396.17	4.90	antv
32	0x0020	PMT	- 39.38	0.49	antv

0	0x0000	PAT	- 38.70	0.48	N/A
43	0x002B	Private Data	- 37.47	0.46	antv
18	0x0012	EIT	- 1.78	0.02	N/A
17	0x0011	SDT	- 0.82	0.01	N/A

20	0x0014	TOT	-	0.27	0.00	N/A
16	0x0010	NIT	-	0.14	0.00	N/A
2	0x0002	TSMT	-	0.14	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 11 MB

ts.TELE-satellite.com/DVB-S/108/TELKOM-4015H-1109.ts



108°E

Network Name

Tandberg

Recording

Vincent Witjhu

Transmitter

TELKOM 1 4.084H

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
33	0x0021	MPEG2 Video	- 7324.15	94.76	Trans TV 1
36	0x0024	MPEG Audio	- 394.26	5.10	Trans TV 1

0	0x0000	PAT	- 3.76	0.05	N/A
32	0x0020	PMT	- 3.62	0.05	Trans TV 1
18	0x0012	EIT	- 1.61	0.02	N/A

17	0x0011	SDT	-	0.81	0.01	N/A
1	0x0001	CAT	-	0.81	0.01	N/A
16	0x0010	NIT	-	0.13	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 10 MB

ts.TELE-satellite.com/DVB-S/108/TELKOM-4084H-1109.ts



108°E

Network Name

DSNG Codec

Recording

Vincent Witjhu

Transmitter

TELKOM 1 4.097H

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name
308	0x0134	MPEG2 Video	- 3423.84	84.72	JTV-REK
257	0x0101	MPEG Audio	- 263.16	6.51	JTV-REK
256	0x0100	MPEG Audio	- 263.16	6.51	JTV-REK

8190	0x1FFE	PCR	- 38.23	0.95	N/A
32	0x0020	PMT	- 7.55	0.19	JTV-REK
20	0x0014	TOT	- 7.55	0.19	N/A
18	0x0012	EIT	- 7.55	0.19	N/A

17	0x0011	SDT	-	7.55	0.19	N/A
16	0x0010	NIT	-	7.55	0.19	N/A
1	0x0001	CAT	-	7.55	0.19	N/A
0	0x0000	PAT	-	7.55	0.19	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 15 MB

ts.TELE-satellite.com/DVB-S/108/TELKOM-4097H-1109.ts

113°E**PALAPA D****113°E****Network Name****SNG TRUCK****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
2201	0x0899	MPEG2 Video	-	7166.88	87.83	SCTV
2203	0x089B	MPEG Audio	-	407.65	5.00	SCTV
2202	0x089A	MPEG Audio	-	407.65	5.00	SCTV
500	0x01F4	ECM/EMM	-	82.94	1.02	N/A

Transmitter**PALAPA D 3.756H**

1130	0x046A	Private Data	-	37.66	0.46	SCTV
5001	0x1389	PMT	-	14.97	0.18	SCTV
1	0x0001	CAT	-	14.97	0.18	N/A
0	0x0000	PAT	-	14.97	0.18	N/A
18	0x0012	EIT	-	6.01	0.07	N/A

16	0x0010	NIT	-	3.00	0.04	N/A
17	0x0011	SDT	-	1.53	0.02	N/A
20	0x0014	TOT	-	1.48	0.02	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 32 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-3756H-1109.ts****113°E****Network Name****ASIALINK****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
308	0x0134	MPEG2 Video	-	6810.44	92.07	ASIALINK
256	0x0100	MPEG Audio	-	272.61	3.69	ASIALINK
257	0x0101	MPEG Audio	-	263.47	3.56	ASIALINK

Transmitter**PALAPA D 3.785H**

8190	0x1FFE	PCR	-	39.46	0.53	N/A
32	0x0020	PMT	-	3.74	0.05	ASIALINK
0	0x0000	PAT	-	3.74	0.05	N/A
18	0x0012	EIT	-	1.66	0.02	N/A

17	0x0011	SDT	-	0.83	0.01	N/A
1	0x0001	CAT	-	0.83	0.01	N/A
16	0x0010	NIT	-	0.28	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 10 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-3785H-1109.ts****113°E****Network Name****B-Channel****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
512	0x0200	MPEG2 Video	-	5172.78	93.88	TVN-1
4112	0x1010	MPEG Audio	-	209.05	3.79	TVN-1

Transmitter**PALAPA D 3.863V**

256	0x0100	PMT	-	30.11	0.55	TVN-1
17	0x0011	SDT	-	30.11	0.55	N/A
16	0x0010	NIT	-	30.11	0.55	N/A

0	0x0000	PAT	-	30.11	0.55	N/A
20	0x0014	TOT	-	7.53	0.14	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 22 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-3863V-1110.ts****113°E****Network Name****MPEG-2 ENCODER****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
33	0x0021	MPEG2 Video	-	5194.48	91.63	Service 1
37	0x0025	MPEG Audio	-	221.24	3.90	Service 1

Transmitter**PALAPA D 3.926H**

36	0x0024	MPEG Audio	-	221.16	3.90	Service 1
32	0x0020	PMT	-	15.04	0.27	Service 1
0	0x0000	PAT	-	15.04	0.27	N/A

17	0x0011	SDT	-	0.99	0.02	N/A
16	0x0010	NIT	-	0.99	0.02	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 22 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-3926H-1109.ts****113°E****Network Name****MPEG-2 ENCODER****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
3601	0x0E11	MPEG2 Video	-	3423.25	88.79	DAAI-TV
3606	0x0E16	MPEG Audio	-	313.56	8.13	DAAI-TV
33	0x0021	PCR	-	75.24	1.95	N/A

Transmitter**PALAPA D 4.044V**

0	0x0000	PAT	-	15.07	0.39	N/A
32	0x0020	PMT	-	15.02	0.39	DAAI-TV
17	0x0011	SDT	-	6.00	0.16	N/A
20	0x0014	TOT	-	3.02	0.08	N/A

16	0x0010	NIT	-	2.98	0.08	N/A
18	0x0012	EIT	-	1.51	0.04	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 22 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-4044V-1110.ts****113°E****Network Name****Indosat 01****Recording****Vincent Witjhun**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
513	0x0201	MPEG2 Video	-	6136.76	18.47	MetroTV
516	0x0204	MPEG2 Video	-	2688.50	8.09	NHK
519	0x0207	H.264 Video	-	2557.16	7.69	CH10
512	0x0200	MPEG2 Video	-	2412.66	7.26	CH3
515	0x0203	MPEG2 Video	-	2305.19	6.94	Spacetoon
514	0x0202	MPEG2 Video	-	2098.78	6.32	Lejel
2102	0x0836	MPEG2 Video	-	2083.89	6.27	CH 20
1902	0x076E	MPEG2 Video	-	2057.68	6.19	Ch 19
1802	0x070A	MPEG2 Video	-	2053.75	6.18	Ch 18
518	0x0206	MPEG2 Video	-	1760.92	5.30	CH7
517	0x0205	MPEG2 Video	-	1557.64	4.69	CH6
520	0x0208	H.264 Video	-	511.41	1.54	CH11
664	0x0298	MPEG Audio	-	262.63	0.79	MTA FM
1903	0x076F	MPEG Audio	-	262.59	0.79	Ch 19
657	0x0291	MPEG Audio	-	262.59	0.79	CH10
656	0x0290	MPEG Audio	-	262.59	0.79	CH7
654	0x028E	MPEG Audio	-	262.59	0.79	NHK
653	0x028D	MPEG Audio	-	262.59	0.79	Spacetoon
652	0x028C	MPEG Audio	-	262.59	0.79	Lejel
651	0x028B	MPEG Audio	-	262.59	0.79	MetroTV
650	0x028A	MPEG Audio	-	262.59	0.79	CH3
2103	0x0837	MPEG Audio	-	262.54	0.79	CH 20

Transmitter**PALAPA D 4.080H**

1803	0x070B	MPEG Audio	-	262.54	0.79	Ch 18
666	0x029A	MPEG Audio	-	262.54	0.79	POP FM
665	0x0299	MPEG Audio	-	262.54	0.79	BBC
658	0x0292	MPEG Audio	-	262.54	0.79	CH11
655	0x028F	MPEG Audio	-	262.54	0.79	CH6
1804	0x070C	MPEG Audio	-	131.67	0.40	Rodja
2001	0x07D1	MPEG Audio	-	66.18	0.20	Reda Crossa
1904	0x0770	MPEG Audio	-	66.18	0.20	Radio 19
8190	0x1FFE	PCR	-	44.28	0.13	N/A
202	0x00CA	PCR	-	39.65	0.12	N/A
2101	0x0835	PCR	-	39.60	0.12	N/A
1901	0x076D	PCR	-	39.60	0.12	N/A
211	0x00D3	PCR	-	39.60	0.12	N/A
210	0x00D2	PCR	-	39.60	0.12	N/A
207	0x00CF	PCR	-	39.60	0.12	N/A
206	0x00CE	PCR	-	39.60	0.12	N/A
205	0x00CD	PCR	-	39.60	0.12	N/A
204	0x00CC	PCR	-	39.60	0.12	N/A
203	0x00CB	PCR	-	39.60	0.12	N/A
201	0x00C9	PCR	-	39.60	0.12	N/A
1801	0x0709	PCR	-	39.55	0.12	N/A
1	0x0001	CAT	-	15.03	0.05	N/A
0	0x0000	PAT	-	15.03	0.05	N/A

Remark

107	0x006B	PMT	-	13.25	0.04	CH7
106	0x006A	PMT	-	13.25	0.04	CH6
104	0x0068	PMT	-	13.25	0.04	Spacetoon
103	0x0067	PMT	-	13.25	0.04	CH3
102	0x0066	PMT	-	13.25	0.04	MetroTV
2900	0x0B54	PMT	-	13.20	0.04	Radio 19
2800	0x0AF0	PMT	-	13.20	0.04	Rodja
2100	0x0834	PMT	-	13.20	0.04	CH 20
2000	0x07D0	PMT	-	13.20	0.04	Reda Crossa
1900	0x076C	PMT	-	13.20	0.04	Ch 19
1800	0x0708	PMT	-	13.20	0.04	Ch 18
117	0x0075	PMT	-	13.20	0.04	POP FM
116	0x0074	PMT	-	13.20	0.04	BBC
115	0x0073	PMT	-	13.20	0.04	68H
114	0x0072	PMT	-	13.20	0.04	MTA FM
111	0x006F	PMT	-	13.20	0.04	CH11
110	0x006E	PMT	-	13.20	0.04	CH10
105	0x0069	PMT	-	13.20	0.04	NHK
101	0x0065	PMT	-	13.20	0.04	Lejel
17	0x0011	SDT	-	4.54	0.01	N/A
16	0x0010	NIT	-	0.19	0.00	N/A
20	0x0014	TOT	-	0.05	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 1 Min, File Size: 133 MB****ts.TELE-satellite.com/DVB-S/113/PALAPA-4080H-1110.ts**



113°E

Network Name

NoName

Recording

Vincent Witjhun

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name
1110	0x0456	MPEG2 Video	-	7750.06	92.87	MNCTV Selayu di Hati
1211	0x04BB	MPEG2 Audio	-	268.68	3.22	MNCTV Selayu di Hati
1213	0x04BD	MPEG2 Audio	-	268.31	3.22	R.DANGDUT TPI

Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
0	0x0000	PAT	-	17.27	0.21	N/A
1002	0x03EA	PMT	-	17.08	0.20	R.DANGDUT TPI
1001	0x03E9	PMT	-	16.90	0.20	MNCTV Selayu di Hati
18	0x0012	EIT	-	5.01	0.06	N/A

17	0x0011	SDT	-	1.49	0.02	N/A
20	0x0014	TOT	-	0.19	0.00	N/A
16	0x0010	NIT	-	0.19	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 32 MB

ts.TELE-satellite.com/DVB-S/113/PALAPA-4185V-1110.ts



113°E

Network Name

HCBN

Recording

Vincent Witjhun

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name
308	0x0134	MPEG2 Video	-	2531.87	93.13	HCBN
256	0x0100	MPEG2 Audio	-	136.62	5.03	HCBN
8190	0x1FFE	PCR	-	38.96	1.43	N/A

Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
32	0x0020	PMT	-	3.79	0.14	HCBN
0	0x0000	PAT	-	3.79	0.14	N/A
18	0x0012	EIT	-	1.76	0.06	N/A
1	0x0001	CAT	-	0.95	0.03	N/A

17	0x0011	SDT	-	0.81	0.03	N/A
16	0x0010	NIT	-	0.14	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 20 MB

ts.TELE-satellite.com/DVB-S/113/PALAPA-4190V-1110.ts

247°E (113°W)

SATMEX 6



247°E

Network Name

ADTH

Recording

Juan Carlos Duarte

PID	Hex PID	Stream Type	Encrypted	kpbs	%	Service Name
8191	0x1FFF	Null Packets	-	6192.45	17.45	N/A
322	0x0142	MPEG2 Video	-	3408.32	9.60	BNV-TV
274	0x0112	MPEG2 Video	-	2703.91	7.62	DA-AI
306	0x0132	MPEG2 Video	-	2225.93	6.27	MACTV
273	0x0111	MPEG2 Video	-	1899.26	5.35	HWAZAN
1001	0x03E9	H.264 Video	-	1047.01	2.95	GDTV
258	0x0102	H.264 Video	\$	861.17	2.43	ETNEWS
37	0x0025	H.264 Video	\$	765.41	2.16	CCTV-MOV
4216	0x1078	H.264 Video	-	744.43	2.10	CCTV4
3105	0x0C21	H.264 Video	\$	742.95	2.09	GDTV
112	0x0070	H.264 Video	\$	701.70	1.98	ZHEJIANG
83	0x0053	H.264 Video	\$	698.15	1.97	BTB
51	0x0033	H.264 Video	\$	684.54	1.93	TVS
74	0x004A	H.264 Video	\$	683.84	1.93	CCTV-ENT
57	0x0039	H.264 Video	\$	681.95	1.92	JIANGSU
66	0x0042	H.264 Video	\$	679.87	1.92	HUNAN
86	0x0056	H.264 Video	\$	675.53	1.90	DRGTV
109	0x006D	H.264 Video	\$	663.25	1.87	XIAMEN
290	0x0122	H.264 Video	\$	659.12	1.86	ETGLB
76	0x004C	H.264 Video	\$	640.39	1.80	PSTV
62	0x003E	H.264 Video	\$	632.57	1.78	ATV
4194	0x1063	H.264 Video	\$	628.59	1.77	PTVN
60	0x003C	H.264 Video	\$	627.60	1.77	CYRTV
69	0x0045	H.264 Video	\$	562.68	1.59	CCTV-OPR
44	0x002C	H.264 Video	\$	560.60	1.58	FUJIAN
71	0x0047	H.264 Video	\$	540.73	1.52	CCTV-E
338	0x0152	MPEG Audio	-	165.37	0.47	RNW-2
339	0x0153	MPEG Audio	-	165.34	0.47	RNW-3
337	0x0151	MPEG Audio	-	165.34	0.47	RNW-1
323	0x0143	MPEG Audio	-	136.91	0.39	BNV-TV
307	0x0133	MPEG Audio	-	132.25	0.37	MACTV
4195	0x1063	MPEG Audio	-	125.74	0.35	CCTV4
259	0x0103	MPEG Audio	\$	125.56	0.35	ETNEWS
79	0x004F	MPEG Audio	\$	125.50	0.35	CCTV-ENT
291	0x0123	MPEG Audio	\$	124.48	0.35	ETGLB
275	0x0113	MPEG Audio	-	104.60	0.29	DA-AI
3766	0x0EB6	?	-	101.14	0.29	N/A
33	0x0021	MPEG Audio	-	99.24	0.28	HWAZAN
342	0x0156	MPEG Audio	-	99.21	0.28	RNW-6
341	0x0155	MPEG Audio	-	99.18	0.28	RNW-5
152	0x0098	ECM/EMM	-	92.53	0.26	N/A
1002	0x03EA	AAC Audio	-	89.76	0.25	GDTV
2018	0x07E2	?	-	75.31	0.21	N/A
2013	0x07DD	?	-	75.31	0.21	N/A
2011	0x07DB	?	-	75.31	0.21	N/A
2007	0x07D7	?	-	75.31	0.21	N/A

Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
2005	0x07D5	?	-	75.31	0.21	N/A
2010	0x07DA	?	-	75.28	0.21	N/A
340	0x0154	MPEG Audio	-	66.12	0.19	RVI-1
68	0x0044	MPEG Audio	\$	62.87	0.18	CCTV-OPR
38	0x0026	MPEG Audio	\$	62.87	0.18	CCTV-MOV
4100	0x1004	MPEG Audio	\$	62.75	0.18	PTVN
113	0x0071	MPEG Audio	\$	62.75	0.18	ZHEJIANG
87	0x0057	MPEG Audio	\$	62.75	0.18	DRGTV
84	0x0054	MPEG Audio	\$	62.75	0.18	BTB
72	0x0048	MPEG Audio	\$	62.75	0.18	CCTV-E
67	0x0043	MPEG Audio	\$	62.75	0.18	HUNAN
61	0x003D	MPEG Audio	\$	62.75	0.18	CYRTV
53	0x0035	MPEG Audio	\$	62.75	0.18	TVS
110	0x006E	MPEG Audio	\$	62.72	0.18	XIAMEN
77	0x004D	MPEG Audio	\$	62.72	0.18	PSTV
63	0x003F	MPEG Audio	\$	62.72	0.18	ATV
58	0x003A	MPEG Audio	\$	62.69	0.18	JIANGSU
47	0x002F	MPEG Audio	\$	62.51	0.18	FUJIAN
3106	0x0C22	AAC Audio	\$	61.43	0.17	GDTV
17	0x0011	SDT	-	25.14	0.07	N/A
16	0x0010	NIT	-	25.11	0.07	N/A
1	0x0001	CAT	-	25.11	0.07	N/A
0	0x0000	PAT	-	25.11	0.07	N/A
114	0x0072	PMT	-	24.30	0.07	ZHEJIANG
111	0x006F	PMT	-	24.30	0.07	XIAMEN
102	0x0066	PMT	-	24.30	0.07	GDTV
101	0x0065	PMT	-	24.30	0.07	RNW-6
100	0x0064	PMT	-	24.30	0.07	RNW-5
99	0x0063	PMT	-	24.30	0.07	RVI-1
98	0x0062	PMT	-	24.30	0.07	RNW-3
97	0x0061	PMT	-	24.30	0.07	RNW-2
96	0x0060	PMT	-	24.30	0.07	RNW-1
88	0x0058	PMT	-	24.30	0.07	DRGTV
85	0x0055	PMT	-	24.30	0.07	BTB
82	0x0052	PMT	-	24.30	0.07	CCTV-ENT
81	0x0051	PMT	-	24.30	0.07	PTVN
78	0x004E	PMT	-	24.30	0.07	PSTV
75	0x004B	PMT	-	24.30	0.07	HWAZAN
73	0x0049	PMT	-	24.30	0.07	CCTV-E
70	0x0046	PMT	-	24.30	0.07	HUNAN
65	0x0041	PMT	-	24.30	0.07	CYRTV
64	0x0040	PMT	-	24.30	0.07	ATV
59	0x003B	PMT	-	24.30	0.07	JIANGSU
56	0x0038	PMT	-	24.30	0.07	TVS
54	0x0036	PMT	-	24.30	0.07	BNV-TV
52	0x0034	PMT	-	24.30	0.07	CCTV4
50	0x0032	PMT	-	24.30	0.07	FUJIAN

49	0x0031	PMT	-	24.30	0.07	GDTV
46	0x002E	PMT	-	24.30	0.07	ETNEWS
40	0x0028	PMT	-	24.30	0.07	CCTV-MOV
39	0x0027	PMT	-	24.30	0.07	DA-AI
36	0x0024	PMT	-	24.30	0.07	CCTV-OPR
35	0x0023	PMT	-	24.30	0.07	MACTV
34	0x0022	PMT	-	24.30	0.07	ETGLB
6144	0x1800	ECM/EMM	-	10.12	0.03	ETNEWS
5640	0x1608	ECM/EMM	-	7.65	0.02	ETGLB
5637	0x1605	ECM/EMM	-	7.65	0.02	CCTV-OPR
5636	0x1604	ECM/EMM	-	7.65	0.02	CCTV-MOV
5635	0x1603	ECM/EMM	-	7.65	0.02	CCTV-ENT
5633	0x1601	ECM/EMM	-	7.65	0.02	BTB
5680	0x1630	ECM/EMM	-	7.62	0.02	XIAMEN
5673	0x1629	ECM/EMM	-	7.62	0.02	ZHEJIANG
5670	0x1626	ECM/EMM	-	7.62	0.02	TVS
5664	0x1620	ECM/EMM	-	7.62	0.02	PTVN
5657	0x1619	ECM/EMM	-	7.62	0.02	PSTV
5655	0x1617	ECM/EMM	-	7.62	0.02	JIANGSU
5654	0x1616	ECM/EMM	-	7.62	0.02	DRGTV
5652	0x1614	ECM/EMM	-	7.62	0.02	HUNAN
5651	0x1613	ECM/EMM	-	7.62	0.02	GDTV
5650	0x1612	ECM/EMM	-	7.62	0.02	FUJIAN
5641	0x1609	ECM/EMM	-	7.62	0.02	ETNEWS
5638	0x1606	ECM/EMM	-	7.62	0.02	CYRTV
5634	0x1602	ECM/EMM	-	7.62	0.02	CCTV-E
5632	0x1600	ECM/EMM	-	7.62	0.02	ATV
6153	0x1809	ECM/EMM	-	5.12	0.01	CCTV-MOV
6152	0x1808	ECM/EMM	-	5.12	0.01	CCTV-ENT
6149	0x1805	ECM/EMM	-	5.12	0.01	BTB
6145	0x1801	ECM/EMM	-	5.12	0.01	ETGLB
6192	0x1830	ECM/EMM	-	5.09	0.01	ZHEJIANG
6185	0x1829	ECM/EMM	-	5.09	0.01	XIAMEN
6184	0x1828	ECM/EMM	-	5.09	0.01	TVS
6176	0x1820	ECM/EMM	-	5.09	0.01	PTVN
6169	0x1819	ECM/EMM	-	5.09	0.01	PSTV
6167	0x1817	ECM/EMM	-	5.09	0.01	JIANGSU
6165	0x1815	ECM/EMM	-	5.09	0.01	HUNAN
6164	0x1814	ECM/EMM	-	5.09	0.01	GDTV
6163	0x1813	ECM/EMM	-	5.09	0.01	FUJIAN
6162	0x1812	ECM/EMM	-	5.09	0.01	DRGTV
6161	0x1811	ECM/EMM	-	5.09	0.01	CYRTV
6160	0x1810	ECM/EMM	-	5.09	0.01	CCTV-OPR
6148	0x1804	ECM/EMM	-	5.09	0.01	ATV
6147	0x1803	ECM/EMM	-	5.09	0.01	CCTV-E
20	0x0014	TOT	-	1.51	0.00	N/A
153	0x0099	ECM/EMM	-	1.35	0.00	N/A

Transponderstream Technical Service File Download for Clients Only

Duration: 3 Min, File Size: 383 MB

www.transponderstream.com/DVB-S/247/SATMEX6-12080H-1110.ts



288°E (72°W)**AMC 6****288°E****Network Name****Site - 1****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
33	0x0021	MPEG2 Video	-	3043.34	20.64	CN23
99	0x0063	MPEG2 Video	-	3012.40	20.43	SEMSAT
36	0x0024	MPEG2 Video	\$	2723.43	18.47	ENC
39	0x0027	MPEG2 Video	\$	2206.62	14.96	C7NQ
8191	0x1FFF	Null Packets	-	552.31	3.75	N/A
35	0x0023	MPEG2 Video	-	479.27	3.25	C7
43	0x002B	MPEG Audio	\$	208.94	1.42	MEGA
47	0x002F	MPEG Audio	\$	208.93	1.42	TKM
45	0x002D	MPEG Audio	\$	208.93	1.42	RAD10
42	0x002A	MPEG Audio	\$	208.91	1.42	POP
41	0x0029	MPEG Audio	-	208.91	1.42	VALE
32	0x0020	MPEG Audio	-	135.82	0.92	CN23
98	0x0062	MPEG Audio	-	135.80	0.92	SEMSAT
63	0x003F	MPEG Audio	-	135.80	0.92	LA950
58	0x003A	MPEG Audio	-	135.80	0.92	CADECO
49	0x0031	MPEG Audio	-	135.80	0.92	AM630

Transmitter	Network Name	Site - 1	Recording
34	0x0022	MPEG Audio	-
53	0x0035	MPEG Audio	\$
38	0x0026	MPEG Audio	\$
37	0x0025	MPEG Audio	\$
51	0x0033	MPEG Audio	-
17	0x0011	SDT	-
16	0x0010	NIT	-
101	0x0065	PMT	-
61	0x003D	PMT	-
1	0x0001	CAT	-
50	0x0032	PMT	-
103	0x0067	PMT	-
62	0x003E	PMT	-
60	0x003C	PMT	-
0	0x0000	PAT	-
82	0x0052	PMT	-
48	0x0030	PMT	-

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
40	0x0028	PMT	-	13.74	0.09	VALE
102	0x0066	PMT	-	13.72	0.09	MEGA
52	0x0034	PMT	-	13.72	0.09	RNAC
44	0x002C	PMT	-	13.72	0.09	CN23
104	0x0068	PMT	-	13.70	0.09	LA950
100	0x0064	PMT	-	13.70	0.09	POP
46	0x002E	PMT	-	13.69	0.09	TKM
64	0x0040	Private PES	-	2.97	0.02	C7
1357	0x054D	ECM/EMM	-	2.40	0.02	C7NQ
1355	0x054B	ECM/EMM	-	2.37	0.02	VALE
1353	0x0549	ECM/EMM	-	2.37	0.02	POP
1346	0x0542	ECM/EMM	-	2.37	0.02	RNAC
1354	0x054A	ECM/EMM	-	2.33	0.02	TKM
1351	0x0547	ECM/EMM	-	2.28	0.02	RAD10
1358	0x054E	ECM/EMM	-	2.25	0.02	ENC
1352	0x0548	ECM/EMM	-	2.21	0.01	MEGA
1280	0x0500	ECM/EMM	-	0.96	0.01	N/A

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 218 MB****www.transponderstream.com/DVB-S/288/AMC6-11546V-1111.ts****288°E****Network Name****TV CRONICA****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
161	0x00A1	MPEG2 Video	-	4550.85	34.43	CM
160	0x00A0	MPEG2 Video	\$	4549.70	34.42	CRONICA TV
162	0x00A2	MPEG2 Video	\$	2067.77	15.64	Service Three
23	0x0017	ECM/EMM	-	380.59	2.88	N/A
8191	0x1FFF	Null Packets	-	324.54	2.46	N/A
88	0x0058	MPEG Audio	\$	269.65	2.04	Service Three

Transmitter	Network Name	TV CRONICA	Recording
84	0x0054	MPEG Audio	-
80	0x0050	MPEG Audio	\$
89	0x0059	MPEG Audio	\$
85	0x0055	MPEG Audio	-
81	0x0051	MPEG Audio	\$
1538	0x0602	ECM/EMM	-
1536	0x0600	ECM/EMM	-

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
16	0x0010	NIT	-	14.55	0.11	N/A
1	0x0001	CAT	-	14.55	0.11	N/A
0	0x0000	PAT	-	14.55	0.11	N/A
1026	0x0402	PMT	-	14.38	0.11	Service Three
1025	0x0401	PMT	-	14.38	0.11	CM
1024	0x0400	PMT	-	14.38	0.11	CRONICA TV
17	0x0011	SDT	-	14.38	0.11	N/A

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 117 MB****www.transponderstream.com/DVB-S/288/AMC6-11603V-1111.ts****288°E****Network Name****4369****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
4194	0x1062	MPEG2 Video	-	3627.41	88.30	CH 3 - LA PAMPA
4197	0x1065	MPEG Audio	-	198.89	4.84	CH 3 - LA PAMPA
8191	0x1FFF	Null Packets	-	60.80	1.48	N/A

Transmitter	Network Name	4369	Recording
0	0x0000	PAT	-
4217	0x1079	PMT	-
16	0x0010	NIT	-
17	0x0011	SDT	-

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
18	0x0012	EIT	-	36.42	0.89	N/A
20	0x0014	TOT	-	36.12	0.88	N/A

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 31 MB****www.transponderstream.com/DVB-S/288/AMC6-11679V-1111.ts****297°E (63°W)****ESTRELLA DEL SUR****297°E****Network Name****ENTEL****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
272	0x0110	MPEG2 Video	-	4519.88	23.84	Via X
256	0x0100	MPEG2 Video	-	4217.90	22.24	Zona Latina
3	0x0003	MPEG2 Video	-	3992.16	21.05	UCV
304	0x0130	MPEG2 Video	-	3238.42	17.08	Vive Deportes
8191	0x1FFF	Null Packets	-	2149.11	11.33	N/A

Transm.	Network Name	ENTEL	Recording
2	0x0002	MPEG Audio	-
273	0x0111	MPEG Audio	-
257	0x0101	MPEG Audio	-
305	0x0131	MPEG Audio	-
4	0x0004	PMT	-
264	0x0108	PMT	-

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
17	0x0011	SDT	-	30.09	0.16	N/A
16	0x0010	NIT	-	30.09	0.16	N/A
280	0x0118	PMT	-	30.02	0.16	Via X
0	0x0000	PAT	-	30.02	0.16	N/A
1	0x0001	CAT	-	29.94	0.16	N/A
312	0x0138	PMT	-	29.87	0.16	Vive Deportes

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 286 MB****www.transponderstream.com/DVB-S/297/ESTRELLA-11600V-1111.ts****297°E****Network Name****ENTEL****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
305	0x0131	MPEG2 Video	\$	5303.59	18.16	03 CANAL 13
273	0x0111	MPEG2 Video	\$	5303.59	18.16	01 MEGA
289	0x0121	MPEG2 Video	-	3886.08	13.30	02 TELETRAK
337	0x0151	MPEG2 Video	-	3702.48	12.68	05 CHILEVISION
353	0x0161	MPEG2 Video	\$	3371.44	11.54	06 CAMARA DIPUTADOS
321	0x0141	MPEG2 Video	-	2268.00	7.76	04 SENADO TV
369	0x0171	MPEG2 Video	\$	1781.57	6.10	07 Business TV
8191	0x1FFF	Null Packets	-	1573.69	5.39	N/A
354	0x0162	MPEG Audio	\$	271.74	0.93	06 CAMARA DIPUTADOS
338	0x0152	MPEG Audio	-	271.74	0.93	05 CHILEVISION
306	0x0132	MPEG Audio	\$	271.74	0.93	03 CANAL 13

Transm.	Network Name	ENTEL	Recording
274	0x0112	MPEG Audio	\$
385	0x0181	MPEG Audio	-
370	0x0172	MPEG Audio	\$
322	0x0142	MPEG Audio	-
290	0x0122	MPEG Audio	-
1281	0x0501	ECM/EMM	-
17	0x0011	SDT	-
389	0x0185	PMT	-
373	0x0175	PMT	-
357	0x0165	PMT	-
341	0x0155	PMT	-
325	0x0145	PMT	-

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
309	0x0135	PMT	-	22.56	0.08	03 CANAL 13
293	0x0125	PMT	-	22.56	0.08	02 TELETRAK
277	0x0115	PMT	-	22.56	0.08	01 MEGA
2	0x0002	NIT	-	22.56	0.08	N/A
1	0x0001	CAT	-	22.56	0.08	N/A
0	0x0000	PAT	-	22.56	0.08	N/A
515	0x0203	ECM/EMM	-	5.66	0.02	03 CANAL 13
519	0x0207	ECM/EMM	-	5.63	0.02	07 Business TV
518	0x0206	ECM/EMM	-	5.63	0.02	06 CAMARA DIPUTADOS
513	0x0201	ECM/EMM	-	5.63	0.02	01 MEGA
20	0x0014	TOT	-	0.40	0.00	N/A

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 444 MB****www.transponderstream.com/DVB-S/297/ESTRELLA-11640V-1111.ts**

330°E (30°W)

HISPASAT



330°E

Network Name **Telecaribe, Colombia**
Transmitter **HISPASAT 11.935V**Recording **Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
101	0x0065	MPEG2 Video	-	3892.72	53.63	TELECARIBE COLOMBIA
103	0x0067	MPEG2 Video	-	2666.68	36.74	ZOOM
102	0x0066	MPEG Audio	-	263.22	3.63	TELECARIBE COLOMBIA
8191	0x1FFF	Null Packets	-	234.66	3.23	N/A

104	0x0068	MPEG Audio	-	132.31	1.82	ZOOM
100	0x0064	PMT	-	15.84	0.22	TELECARIBE COLOMBIA
32	0x0020	PMT	-	15.84	0.22	ZOOM
1	0x0001	CAT	-	15.84	0.22	N/A
0	0x0000	PAT	-	15.84	0.22	N/A

18	0x0012	EIT	-	3.16	0.04	N/A
17	0x0011	SDT	-	1.59	0.02	N/A
16	0x0010	NIT	-	0.31	0.00	N/A
20	0x0014	TOT	-	0.20	0.00	N/A

Transponderstream Technical Service File Download for Clients Only

Duration: 3 Min, File Size: 110 MB

www.transponderstream.com/DVB-S/330/HISPASAT-11935V-1110.ts

330°E

Network Name **TVE, America**
Transmitter **HISPASAT 12.052V**Recording **Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
8191	0x1FFF	Null Packets	-	9215.00	24.21	N/A
4368	0x1110	MPEG2 Video	\$	5585.14	14.67	TVEA1
4384	0x1120	MPEG2 Video	\$	4055.85	10.66	24HTVE
1160	0x0488	MPEG2 Video	\$	3688.44	9.69	ANTENA3
4416	0x1140	MPEG2 Video	\$	3180.82	8.36	TVEA2
4240	0x1090	MPEG2 Video	-	2703.57	7.10	TV3 Cat
4256	0x10A0	MPEG2 Video	-	2703.52	7.10	CANAL VASCO
4208	0x1070	MPEG2 Video	-	2703.52	7.10	TVGA
4209	0x1071	MPEG Audio	-	271.96	0.71	TVGA
36	0x0024	MPEG Audio	-	271.96	0.71	RCLA
46	0x002E	MPEG Audio	-	271.91	0.71	RNE3
45	0x002D	MPEG Audio	-	207.90	0.55	C.R.
44	0x002C	MPEG Audio	-	207.85	0.55	REUS
42	0x002A	MPEG Audio	-	207.85	0.55	C.C.

43	0x002B	MPEG Audio	-	207.80	0.55	EUSK
41	0x0029	MPEG Audio	-	207.80	0.55	RGa
4257	0x10A1	MPEG Audio	-	198.73	0.52	CANAL VASCO
4241	0x1091	MPEG Audio	-	198.68	0.52	TV3 Cat
1120	0x0460	MPEG Audio	-	141.18	0.37	ANTENA3
47	0x002F	MPEG Audio	-	136.01	0.36	REE
4417	0x1141	MPEG Audio	\$	135.95	0.36	TVEA2
49	0x0031	MPEG Audio	-	134.47	0.36	RNE5
38	0x0026	MPEG Audio	-	135.95	0.36	SAR7
4385	0x1121	MPEG Audio	\$	135.90	0.36	24HTVE
4369	0x1111	MPEG Audio	\$	135.90	0.36	TVEA1
35	0x0023	MPEG Audio	-	135.90	0.36	RNE1
68	0x0044	MPEG Audio	-	134.47	0.35	Radio Galicia 2
4386	0x1122	Private Data	\$	131.81	0.35	24HTVE
4370	0x1112	Private Data	\$	131.81	0.35	TVEA1

4418	0x1142	Private Data	\$	131.76	0.35	TVEA2
48	0x0030	PMT	-	83.62	0.22	ANTENA3
1211	0x04BB	MPEG Audio	-	71.02	0.19	NSE Radio
17	0x0011	SDT	-	51.62	0.14	N/A
16	0x0010	NIT	-	30.11	0.08	N/A
1	0x0001	CAT	-	30.11	0.08	N/A
0	0x0000	PAT	-	30.11	0.08	N/A
6001	0x1771	ECM/EMM	-	15.05	0.04	ANTENA3
192	0x00C0	ECM/EMM	-	13.72	0.04	N/A
20	0x0014	TOT	-	10.04	0.03	N/A
4431	0x114F	ECM/EMM	-	6.14	0.02	TVEA2
4399	0x112F	ECM/EMM	-	6.14	0.02	24HTVE
4383	0x111F	ECM/EMM	-	6.14	0.02	TVEA1

Transponderstream Technical Service File Download for Clients Only

Duration: 3 Min, File Size: 578 MB

www.transponderstream.com/DVB-S/330/HISPASAT-12052V-1110.ts

352.5°E (7.5°W)

ATLANTIC BIRD 1



352.5°E

Network Name **TIMB4**
Transmitter **ATLANTIC BIRD 1 12.718H**Recording **Thomas Haring**
MIS

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
757	0x02F5	H.264 Video	-	9232.66	41.14	LA7 HD
762	0x02FA	H.264 Video	-	9232.39	41.14	LA7 test 3D
101	0x0065	H.264 Video	-	1801.87	8.03	LA7 test MOSAICO
8191	0x1FFF	Null Packets	-	1158.70	5.16	N/A
763	0x02FB	MPEG Audio	-	394.77	1.76	LA7 test 3D
758	0x02F6	MPEG Audio	-	394.68	1.76	LA7 HD

18	0x0012	EIT	-	39.17	0.17	N/A
104	0x0068	AAC Audio	-	26.64	0.12	LA7 test MOSAICO
102	0x0066	AAC Audio	-	26.64	0.12	LA7 test MOSAICO
105	0x0069	AAC Audio	-	26.55	0.12	LA7 test MOSAICO
103	0x0067	AAC Audio	-	26.55	0.12	LA7 test MOSAICO
1	0x0001	CAT	-	15.13	0.07	N/A
771	0x0303	PMT	-	15.04	0.07	LA7 test MOSAICO

761	0x02F9	PMT	-	15.04	0.07	LA7 test 3D
756	0x02F4	PMT	-	15.04	0.07	LA7 HD
0	0x0000	PAT	-	15.04	0.07	N/A
21	0x0015	Network Sync	-	2.51	0.01	N/A
17	0x0011	SDT	-	1.58	0.01	N/A
16	0x0010	NIT	-	0.28	0.00	N/A
20	0x0014	TOT	-	0.09	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 92 MB

ts.TELE-satellite.com/DVB-S/352/ATLANTICBIRD-12718H-11101.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 925 MB

www.transponderstream.com/DVB-S/352/ATLANTICBIRD-12718H-11101.ts

352.5°E

Network Name **TIMB2**
Transmitter **ATLANTIC BIRD 1 12.718H**Recording **Thomas Haring**
MIS

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
757	0x02F5	H.264 Video	-	8717.97	38.86	LA7 HD
770	0x0302	H.264 Video	-	4112.51	18.33	LA7D HD
766	0x02FE	H.264 Video	-	3089.98	13.77	MTV HD
790	0x0316	MPEG2 Video	-	2567.23	11.44	RTL 102.5 TV
650	0x028A	MPEG2 Video	-	1465.59	6.53	Padre Pio TV
772	0x0304	AC3 Audio	-	423.75	1.89	LA7D HD
759	0x02F7	AC3 Audio	-	423.75	1.89	LA7 HD
768	0x0300	AC3 Audio	-	423.65	1.89	MTV HD
18	0x0012	EIT	-	259.40	1.16	N/A
792	0x0318	MPEG Audio	-	200.78	0.90	RTL 102.5

791	0x0317	MPEG Audio	-	198.71	0.89	RTL 102.5 TV
8191	0x1FFF	Null Packets	-	193.95	0.86	N/A
651	0x028B	MPEG Audio	-	135.94	0.61	Padre Pio TV
7094	0x1BB6	Data	-	35.05	0.16	ROVI
7041	0x1B81	Data	-	23.86	0.11	ROVI
33	0x0021	PMT	-	15.15	0.07	MTV MUSIC HD
1	0x0001	CAT	-	15.15	0.07	N/A
769	0x0301	PMT	-	15.05	0.07	LA7D HD
765	0x02FD	PMT	-	15.05	0.07	MTV HD
756	0x02F4	PMT	-	15.05	0.07	LA7 HD
549	0x0225	PMT	-	15.05	0.07	Padre Pio TV

490	0x01EA	PMT	-	15.05	0.07	RTL 102.5
290	0x0122	PMT	-	15.05	0.07	RTL 102.5 TV
269	0x010D	PMT	-	15.05	0.07	ROVI
0	0x0000	PAT	-	15.05	0.07	N/A
7040	0x1B80	Data	-	4.65	0.02	ROVI
17	0x0011	SDT	-	2.97	0.01	N/A
21	0x0015	Network Sync	-	2.48	0.01	N/A
16	0x0010	NIT	-	0.30	0.00	N/A
20	0x0014	TOT	-	0.20	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 92 MB

ts.TELE-satellite.com/DVB-S/352/ATLANTICBIRD-12718H-11102.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 926 MB

www.transponderstream.com/DVB-S/352/ATLANTICBIRD-12718H-11102.ts



352.5°E

Network Name

TIMB3

Recording

Thomas Haring

Transmitter ATLANTIC BIRD 1 12.718H

Remark

MIS

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
6112	0x17E0	MPEG2 Video	-	5023.91	22.39	LA7
6122	0x17EA	MPEG2 Video	-	2874.71	12.81	LA7D
6132	0x17F4	MPEG2 Video	-	2567.58	11.44	MTV MUSIC
6117	0x17E5	MPEG2 Video	-	2465.31	10.99	MTV
1457	0x05B1	MPEG2 Video	-	2362.96	10.53	frisbee
981	0x03D5	MPEG2 Video	-	2362.88	10.53	K2
8191	0x1FFF	Null Packets	-	1262.97	5.63	N/A
2039	0x07F7	MPEG2 Video	-	433.78	1.93	La7ondemand
6133	0x17F5	MPEG Audio	-	394.71	1.76	MTV MUSIC
6118	0x17E6	MPEG Audio	-	394.71	1.76	MTV
6113	0x17E1	MPEG Audio	-	263.61	1.17	LA7
18	0x0012	EIT	-	259.63	1.16	N/A
7011	0x1B63	MHP	-	244.39	1.09	LA7
6120	0x17E8	Teletext	-	188.37	0.84	MTV
6115	0x17E3	Teletext	-	150.71	0.67	LA7
7001	0x1B59	MHP	-	144.31	0.64	LA7
7081	0x1BA9	MHP	-	144.23	0.64	LA7
6123	0x17EB	MPEG Audio	-	132.51	0.59	LA7D

1458	0x05B2	MPEG Audio	-	132.51	0.59	frisbee
982	0x03D6	MPEG Audio	-	132.51	0.59	K2
990	0x03DE	MHP	-	94.15	0.42	CUBOVISION
6111	0x17DF	PMT	-	30.16	0.13	LA7
6160	0x1810	PMT	-	15.08	0.07	MTV
6157	0x180D	PMT	-	15.08	0.07	La7ondemand
6152	0x1808	PMT	-	15.08	0.07	LA7D
6141	0x17FD	PMT	-	15.08	0.07	MTV MUSIC
6131	0x17F3	PMT	-	15.08	0.07	MTV MUSIC
6116	0x17E4	PMT	-	15.08	0.07	MTV
6106	0x17DA	PMT	-	15.08	0.07	CUBOVISION
1551	0x060F	PMT	-	15.08	0.07	PIU' SERVIZI
1546	0x060A	PMT	-	15.08	0.07	PORTALE SERVIZI TELECOM
1541	0x0605	PMT	-	15.08	0.07	MTV MUSIC On Demand
1536	0x0600	PMT	-	15.08	0.07	MTV+ On Demand
1531	0x05FB	PMT	-	15.08	0.07	La7 Servizi On Demand
1526	0x05F6	PMT	-	15.08	0.07	La7D On Demand
1521	0x05F1	PMT	-	15.08	0.07	MTV On Demand
1516	0x05EC	PMT	-	15.08	0.07	MTV News On Demand

1512	0x05E8	PMT	-	15.08	0.07	La7 News On Demand
1461	0x05B5	PMT	-	15.08	0.07	frisbee
0	0x0000	PAT	-	15.08	0.07	N/A
6151	0x1807	PMT	-	15.00	0.07	LA7D
6150	0x1806	PMT	-	15.00	0.07	LA7
1511	0x05E7	PMT	-	15.00	0.07	K2
1	0x0001	CAT	-	15.00	0.07	N/A
590	0x024E	Private Sections	-	6.09	0.03	N/A
7080	0x1BA8	Private Sections	-	6.02	0.03	N/A
7010	0x1B62	Private Sections	-	6.02	0.03	N/A
7000	0x1B58	Private Sections	-	6.02	0.03	N/A
577	0x0241	Private Sections	-	6.02	0.03	N/A
400	0x0190	Private Sections	-	6.02	0.03	N/A
17	0x0011	SDT	-	4.45	0.02	N/A
21	0x0015	Network Sync	-	2.42	0.01	N/A
16	0x0010	NIT	-	0.63	0.00	N/A
20	0x0014	TOT	-	0.23	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 92 MB

ts.TELE-satellite.com/DVB-S/352/ATLANTICBIRD-12718H-11103.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 926 MB

www.transponderstream.com/DVB-S/352/ATLANTICBIRD-12718H-11103.ts

DVB-S2

satellite

9°E

EUROBIRD



9°E

Network Name

Kabelkiosk

Recording

Thomas Haring

Transmitter EUROBIRD 10.971H

Remark

cable feed

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
8191	0x1FFF	Null Packets	-	4018.05	7.55	N/A
2273	0x08E1	MPEG2 Video	\$	3665.36	6.89	HSE24
2305	0x0901	MPEG2 Video	\$	3152.18	5.92	Russia Today
2113	0x0841	MPEG2 Video	\$	3140.79	5.90	QVC Plus
2209	0x08A1	MPEG2 Video	\$	2990.83	5.62	VIVA
2497	0x09C1	MPEG2 Video	\$	2587.57	5.61	CNBC
2337	0x0921	MPEG2 Video	\$	2863.09	5.38	Eurosport
2561	0x0A01	MPEG2 Video	\$	2779.54	5.22	Das Vierte
2241	0x08C1	MPEG2 Video	\$	2720.67	5.11	sixx
2593	0x0A21	MPEG2 Video	\$	2675.14	5.03	HSE 24 Extra
2081	0x0821	MPEG2 Video	\$	2567.05	4.82	Channel 21 Shop
2465	0x09A1	MPEG2 Video	\$	2406.72	4.52	CNN
2369	0x0941	MPEG2 Video	\$	2342.50	4.40	1-2-3 TV
2529	0x09E1	MPEG2 Video	\$	2233.27	4.20	DMAX
2145	0x0861	MPEG2 Video	\$	2147.38	4.03	Nick/Comedy Central
2433	0x0981	MPEG2 Video	\$	1809.54	3.40	YAYIDO
2401	0x0961	MPEG2 Video	\$	1368.59	2.57	iMusic 1
2104	0x0838	Teletext	\$	300.74	0.57	Channel 21 Shop
2232	0x08B8	Teletext	\$	296.40	0.56	VIVA
2168	0x0878	Teletext	\$	294.46	0.55	Nick/Comedy Central
2552	0x09F8	Teletext	\$	263.18	0.49	DMAX
2210	0x08A2	MPEG Audio	\$	263.15	0.49	VIVA
2616	0x0A38	Teletext	\$	263.15	0.49	HSE 24 Extra
2392	0x0958	Teletext	\$	263.15	0.49	1-2-3 TV
2264	0x08D8	Teletext	\$	263.15	0.49	sixx
2146	0x0862	MPEG Audio	\$	263.15	0.49	Nick/Comedy Central
2520	0x09D8	Teletext	\$	225.55	0.42	CNBC
2584	0x0A18	Teletext	\$	225.54	0.42	Das Vierte
2050	0x0802	ECM/EMM	-	211.50	0.40	N/A
2498	0x09C2	MPEG Audio	\$	203.63	0.38	CNBC
2434	0x0982	MPEG Audio	\$	200.50	0.38	YAYIDO
2402	0x0962	MPEG Audio	\$	200.50	0.38	iMusic 1
2242	0x08C2	MPEG Audio	\$	200.50	0.38	sixx
2594	0x0A22	MPEG Audio	\$	200.50	0.38	HSE 24 Extra
2530	0x09E2	MPEG Audio	\$	200.50	0.38	DMAX
2274	0x08E2	MPEG Audio	\$	200.50	0.38	HSE24
2082	0x0822	MPEG Audio	\$	200.50	0.38	Channel 21 Shop
2562	0x0A02	MPEG Audio	\$	200.49	0.38	Das Vierte
2370	0x0942	MPEG Audio	\$	200.49	0.38	1-2-3 TV
2338	0x0922	MPEG Audio	\$	200.49	0.38	Eurosport
2049	0x0801	ECM/EMM	-	193.25	0.36	N/A
2136	0x0858	Teletext	\$	187.97	0.35	QVC Plus
2296	0x08F8	Teletext	\$	187.97	0.35	HSE24
18	0x0012	EIT	-	148.66	0.28	N/A
2114	0x0842	MPEG Audio	\$	137.85	0.26	QVC Plus
2466	0x09A2	MPEG Audio	\$	137.84	0.26	CNN
2306	0x0902	MPEG Audio	\$	137.84	0.26	Russia Today
5424	0x1530	ECM/EMM	-	21.35	0.04	N/A

2481	0x09B1	ECM/EMM	-	15.17	0.03	CNN
2480	0x09B0	ECM/EMM	-	15.17	0.03	CNN
2449	0x0991	ECM/EMM	-	15.17	0.03	YAYIDO
2448	0x0990	ECM/EMM	-	15.17	0.03	YAYIDO
2353	0x0931	ECM/EMM	-	15.17	0.03	Eurosport
2352	0x0930	ECM/EMM	-	15.17	0.03	Eurosport
2321	0x0911	ECM/EMM	-	15.17	0.03	Russia Today
2320	0x0910	ECM/EMM	-	15.17	0.03	Russia Today
2161	0x0871	ECM/EMM	-	15.17	0.03	Nick/Comedy Central
2160	0x0870	ECM/EMM	-	15.17	0.03	Nick/Comedy Central
2609	0x0A31	ECM/EMM	-	15.16	0.03	HSE 24 Extra
2608	0x0A30	ECM/EMM	-	15.16	0.03	HSE 24 Extra
2577	0x0A11	ECM/EMM	-	15.16	0.03	Das Vierte
2576	0x0A10	ECM/EMM	-	15.16	0.03	Das Vierte
2545	0x09F1	ECM/EMM	-	15.16	0.03	DMAX
2544	0x09F0	ECM/EMM	-	15.16	0.03	DMAX
2513	0x09D1	ECM/EMM	-	15.16	0.03	CNBC
2512	0x09D0	ECM/EMM	-	15.16	0.03	CNBC
2417	0x0971	ECM/EMM	-	15.16	0.03	iMusic 1
2416	0x0970	ECM/EMM	-	15.16	0.03	iMusic 1
2385	0x0951	ECM/EMM	-	15.16	0.03	1-2-3 TV
2384	0x0950	ECM/EMM	-	15.16	0.03	1-2-3 TV
2289	0x08F1	ECM/EMM	-	15.16	0.03	HSE24
2288	0x08F0	ECM/EMM	-	15.16	0.03	HSE24
2257	0x08D1	ECM/EMM	-	15.16	0.03	sixx
2256	0x08D0	ECM/EMM	-	15.16	0.03	sixx
2225	0x08B1	ECM/EMM	-	15.16	0.03	VIVA
2224	0x08B0	ECM/EMM	-	15.16	0.03	VIVA
2129	0x0851	ECM/EMM	-	15.16	0.03	QVC Plus
2128	0x0850	ECM/EMM	-	15.16	0.03	QVC Plus
2097	0x0831	ECM/EMM	-	15.16	0.03	Channel 21 Shop
2096	0x0830	ECM/EMM	-	15.16	0.03	Channel 21 Shop
16	0x0010	NIT	-	12.89	0.02	N/A
17	0x0011	SDT	-	9.02	0.02	N/A
2452	0x0994	ECM/EMM	-	6.16	0.01	YAYIDO
2580	0x0A14	ECM/EMM	-	6.16	0.01	Das Vierte
2579	0x0A13	ECM/EMM	-	6.16	0.01	Das Vierte
2578	0x0A12	ECM/EMM	-	6.16	0.01	Das Vierte
2548	0x09F4	ECM/EMM	-	6.16	0.01	DMAX
2516	0x09D4	ECM/EMM	-	6.16	0.01	CNBC
2484	0x09B4	ECM/EMM	-	6.16	0.01	CNN
2451	0x0993	ECM/EMM	-	6.16	0.01	YAYIDO
2450	0x0992	ECM/EMM	-	6.16	0.01	YAYIDO
2420	0x0974	ECM/EMM	-	6.16	0.01	iMusic 1
2419	0x0973	ECM/EMM	-	6.16	0.01	iMusic 1
2418	0x0972	ECM/EMM	-	6.16	0.01	iMusic 1
2388	0x0954	ECM/EMM	-	6.16	0.01	1-2-3 TV
2387	0x0953	ECM/EMM	-	6.16	0.01	1-2-3 TV
2386	0x0952	ECM/EMM	-	6.16	0.01	1-2-3 TV

2324	0x0914	ECM/EMM	-	6.16	0.01	Russia Today
2323	0x0913	ECM/EMM	-	6.16	0.01	Russia Today
2322	0x0912	ECM/EMM	-	6.16	0.01	Russia Today
2292	0x08F4	ECM/EMM	-	6.16	0.01	HSE24
2260	0x08D4	ECM/EMM	-	6.16	0.01	sixx
2227	0x08B3	ECM/EMM	-	6.16	0.01	VIVA
2226	0x08B2	ECM/EMM	-	6.16	0.01	VIVA
2164	0x0874	ECM/EMM	-	6.16	0.01	Nick/Comedy Central
2163	0x0873	ECM/EMM	-	6.16	0.01	Nick/Comedy Central
2162	0x0872	ECM/EMM	-	6.16	0.01	Nick/Comedy Central
2132	0x0854	ECM/EMM	-	6.16	0.01	QVC Plus
2100	0x0834	ECM/EMM	-	6.16	0.01	Channel 21 Shop
2099	0x0833	ECM/EMM	-	6.16	0.01	Channel 21 Shop
2098	0x0832	ECM/EMM	-	6.16	0.01	Channel 21 Shop
2547	0x09F3	ECM/EMM	-	6.15	0.01	DMAX
2546	0x09F2	ECM/EMM	-	6.15	0.01	DMAX
2515	0x09D3	ECM/EMM	-	6.15	0.01	CNBC

						
			Transmitter	EUROBIRD 11.881V	Remark	HDTV
PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	
8191	0x1FFF	Null Packets	-	9324.02	17.51	N/A
2010	0x07DA	H.264 Video	-	8202.59	15.40	National Geographic HD
2011	0x07DB	H.264 Video	-	8002.47	15.03	FOX HD
2001	0x07D1	H.264 Video	-	7302.32	13.71	FTV HD
2007	0x07D7	H.264 Video	-	6567.28	12.33	MEZZO HD
2002	0x07D2	H.264 Video	-	5414.85	10.17	iConcerts
2006	0x07D6	H.264 Video	-	4501.45	8.45	Duck TV HD
3006	0x0BBE	MPEG Audio	-	397.01	0.75	Duck TV HD
3001	0x0BB9	MPEG Audio	-	397.01	0.75	FTV HD
5011	0x1393	AC3 Audio	-	394.92	0.74	FOX HD
4010	0x0FAA	AC3 Audio	-	394.92	0.74	National Geographic HD
3010	0x0BC2	AC3 Audio	-	394.92	0.74	National Geographic HD
3007	0x0BBF	MPEG Audio	-	266.41	0.50	MEZZO HD
3002	0x0BBA	MPEG Audio	-	266.41	0.50	iConcerts
502	0x01F6	ECM/EMM	-	211.56	0.40	N/A
3011	0x0BC3	MPEG Audio	-	198.51	0.37	FOX HD
4011	0x0FAB	MPEG Audio	-	198.50	0.37	FOX HD
1000	0x03E8	ECM/EMM	-	98.30	0.18	N/A
18	0x0012	EIT	-	85.39	0.16	N/A
501	0x01F5	ECM/EMM	-	78.33	0.15	N/A
4001	0x0FA1	MPEG Audio	-	73.14	0.14	FTV HD
16	0x0010	NIT	-	25.08	0.05	N/A
1	0x0001	CAT	-	25.06	0.05	N/A
0	0x0000	PAT	-	25.06	0.05	N/A
1011	0x03F3	PMT	-	24.26	0.05	FOX HD
1010	0x03F2	PMT	-	24.26	0.05	National Geographic HD
1008	0x03F0	PMT	-	24.26	0.05	Penthouse HD
1007	0x03EF	PMT	-	24.26	0.05	MEZZO HD
1006	0x03EE	PMT	-	24.26	0.05	Duck TV HD
1002	0x03EA	PMT	-	24.26	0.05	iConcerts
1001	0x03E9	PMT	-	24.26	0.05	FTV HD
116	0x0074	ECM/EMM	-	15.10	0.03	MEZZO HD
132	0x0084	ECM/EMM	-	15.09	0.03	MEZZO HD
119	0x0077	ECM/EMM	-	15.09	0.03	National Geographic HD
121	0x0079	ECM/EMM	-	15.07	0.03	National Geographic HD
118	0x0076	ECM/EMM	-	15.07	0.03	FOX HD
117	0x0075	ECM/EMM	-	15.07	0.03	MEZZO HD
112	0x0070	ECM/EMM	-	15.07	0.03	Duck TV HD
108	0x0068	ECM/EMM	-	15.07	0.03	Duck TV HD
131	0x0083	ECM/EMM	-	15.05	0.03	iConcerts
114	0x0072	ECM/EMM	-	15.05	0.03	Penthouse HD
133	0x0085	ECM/EMM	-	15.04	0.03	Penthouse HD
120	0x0078	ECM/EMM	-	15.04	0.03	FOX HD
115	0x0073	ECM/EMM	-	15.04	0.03	Penthouse HD
100	0x0064	ECM/EMM	-	7.57	0.01	MEZZO HD
101	0x0065	ECM/EMM	-	7.55	0.01	MEZZO HD
103	0x0067	ECM/EMM	-	7.53	0.01	iConcerts
102	0x0066	ECM/EMM	-	7.53	0.01	iConcerts
17	0x0011	SDT	-	6.02	0.01	N/A
20	0x0014	TOT	-	0.13	0.00	N/A

www.transponderstream.com/DVB-S2/009/EUROBIRD-11881V-1111.ts

HOTBIRD

DVB-S2						13°E	Network Name	EUTELSAT 13 EAST	Recording	Thomas Haring			
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	HOTBIRD 10.971H	Remark				HD tests
532	0x0214	H.264 Video	\$	10500.60	18.26	TSR1 HD	547 0x0223 Teletext	- 263.18 0.46	TSR2 HD	1 0x0001 CAT	-	15.03 0.03	N/A
542	0x021E	H.264 Video	\$	10500.55	18.26	TSR1 HD	517 0x0205 Teletext	- 263.18 0.46	SF zwei HD	0 0x0000 PAT	-	15.03 0.03	N/A
532	0x021E	H.264 Video	\$	10500.55	18.26	TSR2 HD	543 0x020F MPEG Audio	\$ 198.50 0.35	TSR2 HD	541 0x021D PMT	-	13.61 0.02	TSR2 HD
512	0x0200	H.264 Video	\$	10500.55	18.26	SF zwei HD	514 0x0202 MPEG Audio	\$ 198.50 0.35	SF zwei HD	531 0x0213 PMT	-	13.61 0.02	TSR1 HD
502	0x01F6	H.264 Video	\$	10500.55	18.26	SF 1 HD	544 0x0220 MPEG Audio	\$ 198.45 0.35	TSR2 HD	511 0x01FF PMT	-	13.61 0.02	SF zwei HD
8191	0x1FFF	Null Packets	-	9526.50	16.57	N/A	534 0x0216 MPEG Audio	\$ 198.45 0.35	TSR1 HD	501 0x01F5 PMT	-	13.61 0.02	SF 1 HD
18	0x0012	EIT	-	1060.37	1.84	N/A	533 0x0215 MPEG Audio	\$ 198.45 0.35	TSR1 HD	17 0x0011 SDT	-	7.61 0.01	N/A
135	0x0217	AC3 Audio	\$	460.64	0.80	TSR1 HD	513 0x0201 MPEG Audio	\$ 198.45 0.35	SF zwei HD	739 0x02E3 ECM/EMM	-	7.56 0.01	SF 1 HD
515	0x0203	AC3 Audio	\$	460.64	0.80	SF zwei HD	504 0x01F8 MPEG Audio	\$ 198.45 0.35	SF 1 HD	729 0x02D9 ECM/EMM	-	7.56 0.01	SF 1 HD
505	0x01F9	AC3 Audio	\$	460.64	0.80	SF 1 HD	503 0x01F7 MPEG Audio	\$ 198.45 0.35	SF 1 HD	719 0x02CF ECM/EMM	-	7.56 0.01	SF 1 HD
545	0x0221	AC3 Audio	\$	460.59	0.80	TSR2 HD	602 0x025A ECM/EMM	- 99.74 0.17	N/A	16 0x0010 NIT	-	4.58 0.01	N/A
537	0x0219	Teletext	-	263.23	0.46	TSR1 HD	604 0x025C ECM/EMM	- 99.70 0.17	N/A	20 0x0014 TOT	-	1.46 0.00	N/A
507	0x01FB	Teletext	-	263.23	0.46	SF 1 HD	603 0x025B ECM/EMM	- 99.70 0.17	N/A				

www.transponderstream.com/DVB-S2/013/HOTBIRD-10971H-1110.ts

DVB

S2

13°E

Network Name

Transmitter

CYFRA+

HOTBIRD

11.411H

Recording

Remark

Thomas Haring

3D tests

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	18	0x0012	EIT	-	225.62	0.33	N/A	33	0x0021	?	-	22.57	0.03	N/A	
161	0x00A1	H.264 Video	\$ 11419.29	16.75	CANAL+ GOL HD	96	0x0060	AC3 Audio	\$	197.45	0.29	teleTOON+ HD	32	0x0020	?	-	22.57	0.03	N/A	
166	0x00A6	H.264 Video	\$ 8748.77	12.83	KUCHNIA+ HD	92	0x005C	AC3 Audio	\$	197.44	0.29	MINIMINI+ HD	0	0x0000	PAT	-	20.01	0.03	N/A	
165	0x00A5	H.264 Video	\$ 7405.04	10.86	PLANETE+ HD	182	0x0086	ECM/EMM	-	186.35	0.27	N/A	183	0x0087	ECM/EMM	-	17.02	0.02	N/A	
167	0x00A7	H.264 Video	\$ 7107.82	10.43	DOMO+ HD	680	0x02A8	?	-	183.85	0.27	N/A	1080	0x0438	PMT	-	10.03	0.01	Service 14280	
162	0x00A2	H.264 Video	\$ 6255.24	9.18	C+ WEEKEND HD	501	0x01F5	Teletext	-	37.59	0.06	CANAL+ FILM HD	17	0x0011	SDT	-	10.03	0.01	N/A	
163	0x00A3	H.264 Video	\$ 5582.34	8.19	MINIMINI+ HD	2110	0x083E	ECM/EMM	-	22.57	0.03	CANAL+ 3D test	16	0x0010	NIT	-	10.03	0.01	N/A	
164	0x00A4	H.264 Video	\$ 4928.63	7.23	teleTOON+ HD	2109	0x083D	ECM/EMM	-	22.57	0.03	ALE KINO+ HD	1	0x0001	CAT	-	10.03	0.01	N/A	
168	0x00A8	H.264 Video	\$ 4071.44	5.97	ALE KINO+ HD	2108	0x083C	ECM/EMM	-	22.57	0.03	DOMO+ HD	1010	0x03F2	PMT	-	10.01	0.01	CANAL+ 3D test	
160	0x00A0	H.264 Video	\$ 3975.70	5.83	CANAL+ FILM HD	2107	0x083B	ECM/EMM	-	22.57	0.03	KUCHNIA+ HD	1009	0x03F1	PMT	-	10.01	0.01	ALE KINO+ HD	
169	0x00A9	H.264 Video	\$ 3520.78	5.16	CANAL+ 3D test	2106	0x083A	ECM/EMM	-	22.57	0.03	PLANETE+ HD	1008	0x03F0	PMT	-	10.01	0.01	DOMO+ HD	
88	0x0058	AC3 Audio	\$ 394.90	0.58	C+ WEEKEND HD	2105	0x0839	ECM/EMM	-	22.57	0.03	teleTOON+ HD	1007	0x03EF	PMT	-	10.01	0.01	KUCHNIA+ HD	
113	0x0071	AC3 Audio	\$ 394.89	0.58	ALE KINO+ HD	2104	0x0838	ECM/EMM	-	22.57	0.03	MINIMINI+ HD	1006	0x03EE	PMT	-	10.01	0.01	PLANETE+ HD	
84	0x0054	AC3 Audio	\$ 394.89	0.58	CANAL+ GOL HD	2103	0x0837	ECM/EMM	-	22.57	0.03	C+ WEEKEND HD	1005	0x03ED	PMT	-	10.01	0.01	teleTOON+ HD	
81	0x0051	AC3 Audio	\$ 394.89	0.58	CANAL+ FILM HD	2102	0x0836	ECM/EMM	-	22.57	0.03	CANAL+ GOL HD	1004	0x03EC	PMT	-	10.01	0.01	MINIMINI+ HD	
8191	0x1FFF	Null Packets	-	370.46	0.54	N/A	2101	0x0835	ECM/EMM	-	22.57	0.03	CANAL+ FILM HD	1003	0x03EB	PMT	-	10.01	0.01	C+ WEEKEND HD
104	0x0068	AC3 Audio	\$ 263.27	0.39	KUCHNIA+ HD	1039	0x040F	PMT	-	22.57	0.03	ALE KINO+ HD	1002	0x03EA	PMT	-	10.01	0.01	CANAL+ GOL HD	
100	0x0064	AC3 Audio	\$ 263.27	0.39	PLANETE+ HD	1038	0x040E	PMT	-	22.57	0.03	DOMO+ HD	1001	0x03E9	PMT	-	10.01	0.01	CANAL+ FILM HD	
116	0x0074	AC3 Audio	\$ 263.26	0.39	CANAL+ 3D test	1037	0x040D	PMT	-	22.57	0.03	KUCHNIA+ HD	184	0x0088	ECM/EMM	-	8.28	0.01	N/A	
112	0x0070	AC3 Audio	\$ 263.26	0.39	ALE KINO+ HD	1036	0x040C	PMT	-	22.57	0.03	PLANETE+ HD	721	0x02D1	DVB Subtitles	-	7.60	0.01	CANAL+ FILM HD	
108	0x006C	AC3 Audio	\$ 263.26	0.39	DOMO+ HD	1035	0x040B	PMT	-	22.57	0.03	teleTOON+ HD	729	0x02D9	DVB Subtitles	-	3.69	0.01	ALE KINO+ HD	
80	0x0050	AC3 Audio	\$ 263.26	0.39	CANAL+ FILM HD	1034	0x040A	PMT	-	22.57	0.03	MINIMINI+ HD	20	0x0014	TOT	-	0.38	0.00	N/A	

www.transponderstream.com/DVB-S2/013/HOTBIRD-11411H-1111.ts

28.2°E

ASTRA

DVB-S2

28.2°E

Network Name

ASTRA

Recording

TELE-satellite

Transmitter

ASTRA 10.847V

Remark

HD

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	ASTRA 10.847V	Remark	TELE-satellite
5400	0x1518	H.264 Video	-	8459.56	29.58	BBC One HD	52 0x0034 ?	198.48 0.69	N/A	2335 0x091F Teletext
2333	0x091D	H.264 Video	\$	7986.90	27.93	ITV1 HD	3846 0x0F06 Data	117.01 0.41	BBC HD	5404 0x151C DVB Subtitles
5500	0x157C	H.264 Video	-	5926.60	20.72	BBC HD	89 0x0059 ?	103.54 0.36	N/A	1287 0x0507 ECM/EMM
2322	0x0912	Private Sections	-	1500.15	5.25	N/A	85 0x0055 ?	51.94 0.18	N/A	0 0x0000 PAT
3847	0x0F07	Data	-	700.23	2.45	BBC HD	3841 0x0F01 Private Sections	50.47 0.18	N/A	288 0x1020 PMT
2321	0x0911	Private Sections	-	500.16	1.75	N/A	5506 0x1582 Private Sections	50.02 0.17	N/A	5504 0x1580 DVB Subtitles
3843	0x0F03	Private Sections	-	312.89	1.09	N/A	5505 0x1581 Private Sections	50.02 0.17	N/A	80 0x0050 ?
96	0x0060	?	-	291.16	1.02	N/A	3845 0x0F05 MHEG	50.02 0.17	BBC HD	3844 0x0F04 Private Sections
192	0x00C0	ECM/EMM	-	285.16	1.00	N/A	2329 0x0919 Private Sections	50.02 0.17	N/A	3840 0x0F00 Private Sections
17	0x0011	SDT	-	274.18	0.96	N/A	260 0x0104 PMT	41.08 0.14	BBC One HD	1 0x0001 CAT
5502	0x157E	MPEG Audio	-	263.32	0.92	BBC HD	259 0x0103 PMT	41.08 0.14	6945	5507 0x1583 Private Sections
5402	0x151A	MPEG Audio	-	263.21	0.92	BBC One HD	258 0x0102 PMT	41.08 0.14	BBC HD	2330 0x091A Private Sections
5501	0x157D	AC3 Audio	-	235.03	0.82	BBC HD	3842 0x0F02 Private Sections	40.51 0.14	N/A	16 0x0010 NIT
5401	0x1519	AC3 Audio	-	235.03	0.82	BBC One HD	18 0x0012 EIT	39.04 0.14	N/A	20 0x0014 TOT
2334	0x091E	AC3 Audio	\$	235.03	0.82	ITV1 HD	5503 0x157F Teletext	37.57 0.13	BBC HD	
							5403 0x151B Teletext	37.57 0.13	BBC One HD	

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 121 MB

ts.TELE-satellite.com/DVB-S2/028/ASTRA-10847V-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1050 MB

www.transponderstream.com/DVB-S2/028/ASTRA-10847V-1111.ts

DVB-S2

28.2°E

Network Name

ASTRA

Recording

TELE-satellite

Transmitter

ASTRA 12.460H

Remark

3D

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	ASTRA 12.460H	Remark	TELE-satellite
513	0x0201	H.264 Video	\$	17747.89	41.10	Sky Arts 1 HD	642 0x0282 MPEG Audio	196.76 0.46	Sky 3D	257 0x0101 PMT
514	0x0202	H.264 Video	\$	12610.29	29.20	Sky 3D	52 0x0034 ?	189.54 0.44	N/A	1033 0x0409 Private Sections
512	0x0200	H.264 Video	\$	8502.03	19.69	Sky News HD	2305 0x0901 Private Sections	167.34 0.39	N/A	1030 0x0406 Private Sections
3080	0x0C08	Private Sections	-	724.90	1.68	N/A	89 0x0059 ?	89.63 0.21	N/A	1283 0x0503 ECM/EMM
3081	0x0C09	Private Sections	-	500.09	1.16	N/A	85 0x0055 ?	59.01 0.14	N/A	1282 0x0502 ECM/EMM
661	0x0295	AC3 Audio	\$	393.51	0.91	Sky Arts 1 HD	259 0x0103 PMT	42.98 0.10	Sky Arts 1 HD	1280 0x0500 ECM/EMM
660	0x0294	AC3 Audio	\$	393.51	0.91	Sky News HD	258 0x0102 PMT	42.98 0.10	Sky News HD	1032 0x0408 Private Sections
662	0x0296	AC3 Audio	\$	393.46	0.91	Sky 3D	2308 0x0904 Teletext	37.57 0.09	Sky News HD	80 0x0050 ?
192	0x00C0	ECM/EMM	-	311.92	0.72	N/A	18 0x0012 EIT	27.23 0.06	N/A	1 0x0001 CAT
96	0x0060	?	-	286.93	0.66	N/A	1034 0x040A Private Sections	24.99 0.06	N/A	16 0x0010 NIT
17	0x0011	SDT	-	269.98	0.63	N/A	261 0x0105 PMT	21.49 0.05	Sky 3D	20 0x0014 TOT
							0 0x0000 PAT	21.49 0.05	N/A	

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 176 MB

ts.TELE-satellite.com/DVB-S2/028/ASTRA-12460H-1111.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1647 MB

www.transponderstream.com/DVB-S2/028/ASTRA-12460H-1111.ts

43°E

TURKSAT

DVB-S2

43°E

Network Name

TURKSAT

Recording

Thomas Haring

Transmitter

TURKSAT 12.015H

Remark

3D red/cyan

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	TURKSAT 12.015H	Remark	Thomas Haring
8191	0x1FFF	Null Packets	-	25053.62	59.27	N/A	210 0x00D2 SSU	248.64 0.59	SUNNY DATA	1 0x0001 CAT
145	0x0091	MPEG2 Video	-	4123.12	9.75	TMB TV	277 0x0115 SSU	224.13 0.53	EAST BEAM S&W UPDATE	0 0x0000 PAT
135	0x0087	MPEG2 Video	-	3639.89	8.61	BENGUTURK TV	136 0x0088 MPEG Audio	209.06 0.49	BENGUTURK TV	777 0x0309 PMT
175	0x00AF	MPEG2 Video	-	2871.66	6.79	3D TEST	116 0x0074 MPEG Audio	198.75 0.47	TURKSAT TANITIM	290 0x122 PMT
155	0x009B	MPEG2 Video	-	2677.05	6.33	KARADENIZTURK	297 0x0129 SSU	130.94 0.31	ICT OAD 1	280 0x0118 PMT
115	0x0073	MPEG2 Video	-	1464.90	3.47	TURKSAT TANITIM	287 0x011F Private PES	128.10 0.30	SKYTECH DATA	270 0x10E PMT
118	0x0076	Teletext	-	301.28	0.71	TURKSAT TANITIM	18 0x0012 EIT	30.15 0.07	N/A	150 0x0096 PMT
176	0x00B0	MPEG Audio	-	263.38	0.62	3D TEST	170 0x00AA PMT	15.07 0.04	3D TEST	110 0x006E PMT
156	0x009C	MPEG Audio	-	262.56	0.62	KARADENIZTURK	140 0x008C PMT	15.07 0.04	TMB TV	17 0x0011 SDT
146	0x0092	MPEG Audio	-	262.51	0.62	TMB TV	130 0x0082 PMT	15.07 0.04	BENGUTURK TV	16 0x0010 NIT
							120 0x0078 PMT	15.07 0.04	BASKENT AB TV	20 0x0014 TOT

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 165 MB

ts.TELE-satellite.com/DVB-S2/043/TURKSAT-12015H-1109.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1588 MB

www.transponderstream.com/DVB-S2/043/TURKSAT-12015H-1109.ts



Transponderstreams are available on
memory cards or by Internet download

www.transponderstream.com

288°E (72°W)**AMC 6****DVB-S2****288°E****Network Name****Arsat****Recording****Juan Carlos Duarte**

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	Transmitter	AMC 6 12.020V	Remark	Mobile TV
8191	0x1FFF	Null Packets	-	15195.79	20.87	N/A			
1296	0x0510	H.264 Video	\$	9519.19	13.07	TV Pública			
400	0x0190	H.264 Video	-	3306.41	4.54	Incaa TV			
368	0x0170	H.264 Video	-	3306.41	4.54	Paka Paka			
352	0x0160	H.264 Video	\$	3306.41	4.54	Gol TV			
304	0x0130	H.264 Video	-	3306.41	4.54	Encuentro			
288	0x0120	H.264 Video	-	3306.41	4.54	Tecnopolis			
384	0x0180	H.264 Video	\$	3306.34	4.54	TaTeTi			
416	0x01A0	H.264 Video	\$	2805.68	3.85	Vivra			
448	0x01C0	H.264 Video	\$	2805.48	3.85	Video Exito			
464	0x01D0	H.264 Video	\$	2654.89	3.65	G360			
496	0x01F0	H.264 Video	\$	2654.82	3.65	Construir			
320	0x0140	H.264 Video	\$	2654.76	3.65	C5N			
272	0x0110	H.264 Video	\$	2654.76	3.65	CN 23			
43	0x002B	H.264 Video	\$	2654.62	3.65	Telesur			
432	0x01B0	H.264 Video	\$	2103.79	2.89	Suri TV			
480	0x01E0	H.264 Video	-	2103.72	2.89	Turismo			
70	0x0046	H.264 Video	-	293.61	0.40	Encuentro Móvil			
49	0x0031	H.264 Video	\$	293.34	0.40	CN 23 Móvil			
74	0x004A	H.264 Video	\$	293.28	0.40	Gol TV Móvil			
72	0x0048	H.264 Video	-	293.07	0.40	TV Pública Móvil			
18	0x0012	EIT	-	253.84	0.35	N/A			
236	0x00EC	PCR	-	100.21	0.14	Service 4094			
235	0x00EB	PCR	-	100.21	0.14	Service 4093			
417	0x01A1	AAC Audio	\$	72.26	0.10	Vivra			
497	0x01F1	AAC Audio	\$	71.72	0.10	Construir			
45	0x002D	AAC Audio	\$	71.24	0.10	Telesur			
482	0x01E2	AAC Audio	-	70.70	0.10	Turismo			
466	0x01D2	AAC Audio	\$	70.57	0.10	G360			
434	0x01B2	AAC Audio	\$	70.57	0.10	Suri TV			
58	0x003A	AAC Audio	-	70.57	0.10	Incaa TV			
55	0x0037	AAC Audio	\$	70.57	0.10	Gol TV			
56	0x0038	AAC Audio	-	70.50	0.10	Paka Paka			
34	0x0022	AAC Audio	-	70.50	0.10	Tecnopolis			
450	0x01C2	AAC Audio	\$	70.36	0.10	Video Exito			
59	0x003B	AAC Audio	\$	70.30	0.10	Vivra			
53	0x0035	AAC Audio	\$	70.30	0.10	C5N			
52	0x0034	AAC Audio	\$	70.30	0.10	CN 23			
40	0x0028	AAC Audio	-	70.30	0.10	Encuentro			
54	0x0036	AAC Audio	\$	70.16	0.10	Telesur			
60	0x003C	AAC Audio	\$	70.09	0.10	TV Pública			
57	0x0039	AAC Audio	\$	69.96	0.10	TaTeTi			
498	0x01F2	AAC Audio	\$	69.82	0.10	Construir			
289	0x0121	AAC Audio	-	69.76	0.10	Tecnopolis			
353	0x0161	AAC Audio	\$	69.55	0.10	Gol TV			
305	0x0131	AAC Audio	-	69.35	0.10	Encuentro			
321	0x0141	AAC Audio	\$	69.28	0.10	C5N			
273	0x0111	AAC Audio	\$	69.15	0.09	CN 23			
369	0x0171	AAC Audio	-	68.95	0.09	Paka Paka			
385	0x0181	AAC Audio	\$	68.81	0.09	TaTeTi			
1297	0x0511	AAC Audio	\$	68.61	0.09	TV Pública			
387	0x0183	AAC Audio	\$	40.25	0.06	Radio Nacional			
355	0x0163	AAC Audio	\$	40.11	0.06	Radio 961			
339	0x0153	AAC Audio	\$	40.04	0.05	Radio 951			
307	0x0133	AAC Audio	\$	40.04	0.05	Radio 931			
51	0x0033	AAC Audio	\$	36.74	0.05	Radio 911			
433	0x0181	AAC Audio	\$	35.59	0.05	Suri TV			
465	0x01D1	AAC Audio	\$	35.52	0.05	G360			
481	0x01E1	AAC Audio	-	35.39	0.05	Turismo			
449	0x01C1	AAC Audio	\$	35.39	0.05	Video Exito			
403	0x0193	AAC Audio	\$	35.32	0.05	Radio 991			
401	0x0191	AAC Audio	-	35.32	0.05	Incaa TV			
371	0x0173	AAC Audio	\$	35.32	0.05	Radio 971			
323	0x0143	AAC Audio	\$	35.32	0.05	Radio 941			
75	0x004B	AAC Audio	\$	35.32	0.05	Gol TV Móvil			
73	0x0049	AAC Audio	-	35.32	0.05	TV Pública Móvil			
71	0x0047	AAC Audio	-	35.32	0.05	Encuentro Móvil			
48	0x0030	AAC Audio	\$	35.32	0.05	Radio 921			
35	0x0023	AAC Audio	\$	35.32	0.05	CN 23 Móvil			
32	0x0020	AAC Audio	\$	35.32	0.05	Radio 910			
1	0x0001	CAT	-	25.12	0.03	N/A			
0	0x0000	PAT	-	25.05	0.03	N/A			
4094	0x0FFE	PMT	-	24.31	0.03	Service 4094			
4093	0x0FFD	PMT	-	24.31	0.03	Service 4093			
2362	0x093A	PMT	-	24.31	0.03	Radio 931			
1306	0x051A	PMT	-	24.31	0.03	TV Pública			
426	0x01AA	PMT	-	24.31	0.03	Vivra			
410	0x019A	PMT	-	24.31	0.03	Incaa TV			
394	0x018A	PMT	-	24.31	0.03	TaTeTi			
378	0x017A	PMT	-	24.31	0.03	Paka Paka			
362	0x016A	PMT	-	24.31	0.03	Gol TV			
330	0x014A	PMT	-	24.31	0.03	C5N			
314	0x013A	PMT	-	24.31	0.03	Encuentro			
298	0x012A	PMT	-	24.31	0.03	Tecnopolis			
282	0x011A	PMT	-	24.31	0.03	CN 23			
69	0x0045	PMT	-	24.31	0.03	Turismo			
67	0x0043	PMT	-	24.31	0.03	Construir			
66	0x0042	PMT	-	24.31	0.03	Video Exito			
65	0x0041	PMT	-	24.31	0.03	G360			
64	0x0040	PMT	-	24.31	0.03	Suri TV			
63	0x003F	PMT	-	24.31	0.03	Gol TV Móvil			
62	0x003E	PMT	-	24.31	0.03	TV Pública Móvil			
61	0x003D	PMT	-	24.31	0.03	Encuentro Móvil			
50	0x0032	PMT	-	24.31	0.03	Radio 911			
47	0x002F	PMT	-	24.31	0.03	Radio 921			
46	0x002E	PMT	-	24.31	0.03	Radio 910			
44	0x002C	PMT	-	24.31	0.03	Radio 991			
42	0x002A	PMT	-	24.31	0.03	Radio Nacional			
41	0x0029	PMT	-	24.31	0.03	Telesur			
39	0x0027	PMT	-	24.31	0.03	Radio 971			
38	0x0026	PMT	-	24.31	0.03	CN 23 Móvil			
37	0x0025	PMT	-	24.31	0.03	Radio 961			
36	0x0024	PMT	-	24.31	0.03	Radio 951			
33	0x0021	PMT	-	24.31	0.03	Radio 941			
17	0x0011	SDT	-	11.07	0.02	N/A			
1329	0x0531	ECM/EMM	-	5.06	0.01	Video Exito			
1313	0x0521	ECM/EMM	-	5.06	0.01	CN 23 Móvil			
1409	0x0581	ECM/EMM	-	5.00	0.01	TV Pública			
1376	0x0560	ECM/EMM	-	5.00	0.01	Radio 910			
1369	0x0559	ECM/EMM	-	5.00	0.01	Radio 991			
1368	0x0558	ECM/EMM	-	5.00	0.01	Radio Nacional			
1367	0x0557	ECM/EMM	-	5.00	0.01	Radio 971			
1366	0x0556	ECM/EMM	-	5.00	0.01	Radio 961			
1365	0x0555	ECM/EMM	-	5.00	0.01	Radio 951			
1364	0x0554	ECM/EMM	-	5.00	0.01	Radio 941			
1363	0x0553	ECM/EMM	-	5.00	0.01	Radio 931			
1362	0x0552	ECM/EMM	-	5.00	0.01	Radio 921			
1361	0x0551	ECM/EMM	-	5.00	0.01	Radio 911			
1332	0x0534	ECM/EMM	-	5.00	0.01	Construir			
1330	0x0532	ECM/EMM	-	5.00	0.01	G360			
1328	0x0530	ECM/EMM	-	5.00	0.01	Suri TV			
1314	0x0522	ECM/EMM	-	5.00	0.01	Gol TV Móvil			
1298	0x0512	ECM/EMM	-	5.00	0.01	Vivra			
1288	0x0508	ECM/EMM	-	5.00	0.01	TaTeTi			
1286	0x0506	ECM/EMM	-	5.00	0.01	Gol TV			
1285	0x0505	ECM/EMM	-	5.00	0.01	Telesur			
1284	0x0504	ECM/EMM	-	5.00	0.01	C5N			
1281	0x0501	ECM/EMM	-	5.00	0.01	CN 23			
16	0x0010	NIT	-	3.98	0.01	N/A			
1537	0x0601	ECM/EMM	-	1.69	0.00	N/A			
20	0x0014	TOT	-	1.55	0.00	N/A			

Transponderstream Technical Service File Download for Clients Only**Duration: 3 Min, File Size: 648 MB****www.transponderstream.com/DVB-S2/288/AMC6-12020V-1111.ts****299°E****AMAZONAS****DVB-S2****299°E****Network Name****AMZ-2****Recording****Juan Carlos Duarte**

LV3S2		299% E			Transmitter		AMAZONAS 10.728V			Remark		HD							
PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	18	0x0012	EIT	-	248.16	0.43	N/A	4011	0x0FAB	ECM/EMM	-	15.09	0.03	TNT HD
2024	0x07E8	H.264 Video	\$ 6751.80	11.60	A&E HD	286	0x011E	ECM/EMM	-	199.63	0.34	N/A	4010	0x0FAA	ECM/EMM	-	15.09	0.03	TNT HD
2019	0x07E3	H.264 Video	\$ 6477.40	11.13	MAX HD	3022	0x0BCE	MPEG Audio	\$	198.74	0.34	Cinema Golden HD	1022	0x03FE	PMT	-	15.09	0.03	Space HD
2021	0x07E5	H.264 Video	\$ 6434.07	11.06	Sony HD	288	0x0120	ECM/EMM	-	157.34	0.27	N/A	1006	0x03EE	PMT	-	15.09	0.03	History Channel HD
2025	0x07E9	H.264 Video	\$ 5812.80	9.99	Space HD	17	0x0011	SDT	-	148.79	0.26	N/A	1005	0x03ED	PMT	-	15.09	0.03	Cinema Golden HD
2627	0x0A43	H.264 Video	\$ 5649.14	9.71	AXN HD	16	0x0010	NIT	-	20.59	0.04	N/A	1003	0x03EB	PMT	-	15.09	0.03	TNT HD
2624	0x0A40	H.264 Video	\$ 5649.07	9.71	Warner Channel HD	4658	0x1232	ECM/EMM	-	15.09	0.03	AXN HD	4068	0x0FE4	ECM/EMM	-	15.01	0.03	MAX HD
2020	0x07E4	H.264 Video	\$ 5509.12	9.47	TNT HD	4657	0x1231	ECM/EMM	-	15.09	0.03	AXN HD	4067	0x0FE3	ECM/EMM	-	15.01	0.03	MAX HD
2022	0x07E6	H.264 Video	\$ 4541.13	7.80	Cinema Golden HD	4623	0x120F	ECM/EMM	-	15.09	0.03	Warner Channel HD	1627	0x065B	PMT	-	15.01	0.03	AXN HD
2023	0x07E7	H.264 Video	\$ 4018.42	6.91	History Channel HD	4622	0x120E	ECM/EMM	-	15.09	0.03	Warner Channel HD	1624	0x0658	PMT	-	15.01	0.03	Warner Channel HD
8191	0x1FFF	Null Packets	- 1976.25	3.40	N/A	4032	0x0FC0	ECM/EMM	-	15.09	0.03	Space HD	1007	0x03EF	PMT	-	15.01	0.03	A&E HD
287	0x011F	ECM/EMM	- 557.72	0.96	N/A	4030	0x0FBF	ECM/EMM	-	15.09	0.03	Space HD	1004	0x03EC	PMT	-	15.01	0.03	Sony HD
3640	0x0E38	AC3 Audio	\$ 423.86	0.73	AXN HD	4028	0x0FBE	ECM/EMM	-	15.09	0.03	A&E HD	1002	0x03EA	PMT	-	15.01	0.03	MAX HD
3618	0x0E22	AC3 Audio	\$ 423.86	0.73	Warner Channel HD	4026	0x0FBA	ECM/EMM	-	15.09	0.03	A&E HD	0	0x0000	PAT	-	15.01	0.03	N/A
3025	0x0BD1	AC3 Audio	\$ 423.86	0.73	Space HD	4024	0x0FBB	ECM/EMM	-	15.09	0.03	History Channel HD	1	0x0001	CAT	-	14.86	0.03	N/A
3024	0x0BD0	AC3 Audio	\$ 423.86	0.73	A&E HD	4022	0x0FB6	ECM/EMM	-	15.09	0.03	History Channel HD	292	0x0124	ECM/EMM	-	1.04	0.00	N/A
3023	0x0BCF	AC3 Audio	\$ 423.86	0.73	History Channel HD	4020	0x0FB4	ECM/EMM	-	15.09	0.03	Cinema Golden HD	291	0x0123	ECM/EMM	-	1.04	0.00	N/A
3020	0x0BCC	AC3 Audio	\$ 423.86	0.73	TNT HD	4016	0x0FB8	ECM/EMM	-	15.09	0.03	Cinema Golden HD	290	0x0122	ECM/EMM	-	1.04	0.00	N/A
3021	0x0BCD	AC3 Audio	\$ 423.79	0.73	Sony HD	4014	0x0FAE	ECM/EMM	-	15.09	0.03	Sony HD	289	0x0121	ECM/EMM	-	1.04	0.00	N/A
3019	0x0BCB	AC3 Audio	\$ 423.79	0.73	MAX HD	4012	0x0FAC	ECM/EMM	-	15.09	0.03	Sony HD	20	0x0014	TOT	-	1.04	0.00	N/A

299°E

DVBS2

299°E

Network Name

AMZ-2

Recording

Juan Carlos Duarte

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	AMAZONAS	10.808H	Remark	HD
7324	0x1C9C	H.264 Video	\$	5643.15	9.71	Nat Geo Wild HD	18	0x0012	EIT	- 247.13 0.43 N/A	1757 0x06DD PMT - 15.09 0.03 Movie City HD
7361	0x0AC9	H.264 Video	\$	5643.15	9.71	RCN HD	286	0x011E	ECM/EMM	- 206.16 0.35 N/A	1755 0x06DB PMT - 15.09 0.03 MTV LIVE HD
2753	0x0AC1	H.264 Video	\$	5643.15	9.71	Fox - Nat Geo HD	3761	0x0EB1	MPEG Audio	\$ 198.70 0.34 RCN HD	1753 0x06D9 PMT - 15.09 0.03 Fox - Nat Geo HD
2752	0x0AC0	H.264 Video	\$	5643.15	9.71	Discovery Theater HD	17	0x0011	SDT	- 148.77 0.26 N/A	1752 0x06DB PMT - 15.09 0.03 Discovery Theater HD
2751	0x0ABF	H.264 Video	\$	5643.15	9.71	Rush HD	288	0x0120	ECM/EMM	- 127.54 0.22 N/A	1751 0x06D7 PMT - 15.09 0.03 Rush HD
2759	0x0AC7	H.264 Video	\$	5642.99	9.71	Fox Sports HD	16	0x0010	NIT	- 20.23 0.03 N/A	1241 0x04D9 PMT - 15.09 0.03 UNIVERSAL CHANNEL HD
2755	0x0AC6	H.264 Video	\$	5642.99	9.71	MTV LIVE HD	7304	0x1C88	PMT	- 15.09 0.03 Nat Geo Wild HD	0 0x0000 PAT - 15.09 0.03 N/A
2241	0x08C1	H.264 Video	\$	5642.99	9.71	UNIVERSAL CHANNEL HD	4759	0x1297	ECM/EMM	- 15.09 0.03 Fox Sports HD	4761 0x1299 ECM/EMM - 14.93 0.03 RCN HD
2757	0x0AC5	H.264 Video	\$	5639.17	9.70	Movie City HD	4757	0x1295	ECM/EMM	- 15.09 0.03 Movie City HD	4758 0x1296 ECM/EMM - 14.93 0.03 Nat Geo Wild HD
8191	0x1FFF	Null Packets	-	1987.31	3.42	N/A	4753	0x1291	ECM/EMM	- 15.09 0.03 Fox - Nat Geo HD	4755 0x1293 ECM/EMM - 14.93 0.03 MTV LIVE HD
287	0x011F	ECM/EMM	-	507.86	0.87	N/A	4752	0x1290	ECM/EMM	- 15.09 0.03 Discovery Theater HD	4751 0x128F ECM/EMM - 14.93 0.03 Rush HD
353	0x0EA9	AC3 Audio	\$	470.54	0.81	Fox - Nat Geo HD	4691	0x1253	ECM/EMM	- 15.09 0.03 Fox Sports HD	4692 0x1254 ECM/EMM - 14.93 0.03 RCN HD
3241	0x0CA9	AC3 Audio	\$	470.37	0.81	UNIVERSAL CHANNEL HD	4689	0x1251	ECM/EMM	- 15.09 0.03 Movie City HD	4690 0x1252 ECM/EMM - 14.93 0.03 Nat Geo Wild HD
7344	0x1CB0	AC3 Audio	\$	423.44	0.73	Nat Geo Wild HD	4688	0x1250	ECM/EMM	- 15.09 0.03 MTV LIVE HD	4686 0x124E ECM/EMM - 14.93 0.03 Discovery Theater HD
3757	0x0EAD	AC3 Audio	\$	423.44	0.73	Movie City HD	4687	0x124F	ECM/EMM	- 15.09 0.03 Fox - Nat Geo HD	1 0x0001 CAT - 14.76 0.03 N/A
3755	0x0EAB	AC3 Audio	\$	423.44	0.73	MTV LIVE HD	4685	0x124D	ECM/EMM	- 15.09 0.03 Rush HD	292 0x0124 ECM/EMM - 1.00 0.00 N/A
3752	0x0EA8	AC3 Audio	\$	423.44	0.73	Discovery Theater HD	4345	0x10F9	ECM/EMM	- 15.09 0.03 UNIVERSAL CHANNEL HD	291 0x0123 ECM/EMM - 1.00 0.00 N/A
3751	0x0EA7	AC3 Audio	\$	423.27	0.73	Rush HD	4343	0x10F7	ECM/EMM	- 15.09 0.03 UNIVERSAL CHANNEL HD	290 0x0122 ECM/EMM - 1.00 0.00 N/A
3759	0x0EAF	MPEG Audio	\$	394.24	0.68	Fox Sports HD	1761	0x06E1	PMT	- 15.09 0.03 RCN HD	289 0x0121 ECM/EMM - 1.00 0.00 N/A
							1759	0x06DF	PMT	- 15.09 0.03 Fox Sports HD	20 0x0014 TOT - 1.00 0.00 N/A

Duration: 30 Sec, File Size: 65 MB

ts.TELE-satellite.com/DVB-S2/299/AMAZONAS-10808H-1110.ts

330°E (30°W)

HISPASAT

330°E

						330°E		Network Name		IVG Default Network		Recording		Juan Carlos Duarte						
						Transmitter		HISPASAT 11.910V		Remark		H.264								
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	103	0x0067	MPEG Audio	\$	100.28	0.78	Eventos2	7504	0x1D50	ECM/EMM	-	5.08	0.04	Canal 4
102	0x0066	H.264 Video	\$	2089.27	16.30	Eventos2	1308	0x051C	PCR	-	42.98	0.34	N/A	7503	0x1DAF	ECM/EMM	-	5.08	0.04	Canal 4
904	0x0388	H.264 Video	\$	1417.45	11.06	Rut	1305	0x0519	PCR	-	42.98	0.34	N/A	508	0x01FC	PMT	-	5.02	0.04	CX20
901	0x0385	H.264 Video	\$	1417.38	11.06	Canal 12	1301	0x0515	PCR	-	42.98	0.34	N/A	504	0x01F8	PMT	-	5.02	0.04	Canal 5
1309	0x051D	H.264 Video	\$	1373.95	10.72	Eventos	907	0x038B	PCR	-	42.98	0.34	N/A	500	0x01F4	PMT	-	5.02	0.04	Canal 4
506	0x01FA	H.264 Video	-	1373.90	10.72	Canal 5	509	0x01FD	PCR	-	42.98	0.34	N/A	1307	0x051B	PMT	-	5.01	0.04	Eventos
502	0x01F6	H.264 Video	-	1373.88	10.72	Canal 4	505	0x01F9	PCR	-	42.98	0.34	N/A	1304	0x0518	PMT	-	5.01	0.04	Zoe
1302	0x0516	H.264 Video	-	1373.86	10.72	TVCiudad	501	0x01F5	PCR	-	42.98	0.34	N/A	1300	0x0514	PMT	-	5.01	0.04	TVCiudad
8191	0x1FFF	Null Packets	-	798.61	6.23	N/A	101	0x0065	PCR	-	42.98	0.34	N/A	906	0x038A	PMT	-	5.01	0.04	Radio_Cero
908	0x038C	MPEG Audio	-	100.30	0.78	Radio_Cero	18	0x0012	EIT	-	30.08	0.23	N/A	903	0x0387	PMT	-	5.01	0.04	Rut
1310	0x051E	MPEG Audio	\$	100.29	0.78	Eventos	17	0x0011	SDT	-	6.02	0.05	N/A	900	0x0384	PMT	-	5.01	0.04	Canal 12
1306	0x051A	MPEG Audio	-	100.29	0.78	Zoe	7510	0x1D56	ECM/EMM	-	5.09	0.04	Eventos2	100	0x0064	PMT	-	5.01	0.04	Eventos2
1303	0x0517	MPEG Audio	-	100.29	0.78	TVCiudad	7509	0x1D55	ECM/EMM	-	5.09	0.04	Eventos2	0	0x0000	PAT	-	5.01	0.04	N/A
909	0x038D	MPEG Audio	-	100.29	0.78	Radio_Cero	7502	0x1D4E	ECM/EMM	-	5.09	0.04	Eventos	7903	0x1EDF	ECM/EMM	-	4.83	0.04	N/A
905	0x0389	MPEG Audio	\$	100.29	0.78	Rut	7500	0x1D4C	ECM/EMM	-	5.09	0.04	Eventos	16	0x0010	NIT	-	3.01	0.02	N/A
902	0x0386	MPEG Audio	\$	100.29	0.78	Canal 12	7508	0x1D54	ECM/EMM	-	5.08	0.04	Rut	1	0x0001	CAT	-	3.01	0.02	N/A
510	0x01FE	MPEG Audio	-	100.29	0.78	CX20	7507	0x1D53	ECM/EMM	-	5.08	0.04	Rut	7902	0x1EDE	ECM/EMM	-	0.14	0.00	N/A
507	0x01FB	MPEG Audio	-	100.28	0.78	Canal 5	7506	0x1D52	ECM/EMM	-	5.08	0.04	Canal 12	20	0x0014	TOT	-	0.10	0.00	N/A
503	0x01F7	MPEG Audio	\$	100.28	0.78	Canal 4	7505	0x1D51	ECM/EMM	-	5.08	0.04	Canal 12							

Duration: 3 Min, File Size: 485 MB

www.transponderstream.com/DVB-S2/330/HISPASAT-11910V-1111.ts

359°E

THOR 5

359°E

							Network Name		Telenor		Recording		Thomas Haring							
					Transmitter	THOR 5 11.785H		Remark		3D tests encrypted										
PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	610	0x0262	DVB Subtitles	-	15.49	0.02	Nat Geo HD	75	0x004B	ECM/EMM	-	15.12	0.02	Nat Geo Wild HD	
516	0x0204	H.264 Video	\$ 13846.91	20.65	TV 2 3D	612	0x0264	DVB Subtitles	-	15.24	0.02	Nat Geo HD	261	0x0105	PMT	-	14.99	0.02	TV 2 3D	
515	0x0203	H.264 Video	\$ 12305.98	18.35	ESPN America HD	272	0x0110	PMT	-	15.12	0.02	MTV Live HD	184	0x0088	ECM/EMM	-	14.99	0.02	Nat Geo HD	
512	0x0200	H.264 Video	\$ 12038.82	17.95	Nat Geo HD	271	0x010F	PMT	-	15.12	0.02	Nat Geo Wild HD	174	0x00A5	ECM/EMM	-	14.99	0.02	Nat Geo HD	
513	0x0201	H.264 Video	\$ 11995.69	17.89	Nat Geo Wild HD	270	0x010E	PMT	-	15.12	0.02	Nat Geo HD	102	0x0066	ECM/EMM	-	14.99	0.02	MTV Live HD	
514	0x0202	H.264 Video	\$ 9947.94	14.83	MTV Live HD	260	0x0104	PMT	-	15.12	0.02	MTV Live HD	100	0x0064	ECM/EMM	-	14.99	0.02	Nat Geo HD	
8191	0x1FFF	Null Packets	-	3428.83	5.11	N/A	259	0x0103	PMT	-	15.12	0.02	ESPN America HD	1	0x0001	CAT	-	14.99	0.02	N/A
641	0x0281	AC3 Audio	\$ 462.09	0.69	Nat Geo HD	258	0x0102	PMT	-	15.12	0.02	ESPN America HD	0	0x0000	PAT	-	14.99	0.02	N/A	
48	0x0030	ECM/EMM	-	413.14	0.62	N/A	257	0x0101	PMT	-	15.12	0.02	Nat Geo Wild HD	611	0x0263	DVB Subtitles	-	13.63	0.02	Nat Geo HD
18	0x0012	EIT	-	401.25	0.60	N/A	256	0x0100	PMT	-	15.12	0.02	Nat Geo HD	16	0x0010	NIT	-	12.89	0.02	N/A
657	0x0291	AC3 Audio	-	400.75	0.60	TV 2 3D	104	0x0068	ECM/EMM	-	15.12	0.02	TV 2 3D	95	0x005F	ECM/EMM	-	5.08	0.01	Nat Geo Wild HD
648	0x0288	AC3 Audio	\$ 400.75	0.60	MTV Live HD	103	0x0067	ECM/EMM	-	15.12	0.02	ESPN America HD	94	0x005E	ECM/EMM	-	5.08	0.01	Nat Geo HD	
656	0x0290	MPEG Audio	\$ 267.17	0.40	TV 2 3D	101	0x0065	ECM/EMM	-	15.12	0.02	Nat Geo Wild HD	97	0x0061	ECM/EMM	-	4.96	0.01	ESPN America HD	
652	0x028C	MPEG Audio	\$ 263.20	0.39	ESPN America HD	96	0x0060	ECM/EMM	-	15.12	0.02	ESPN America HD	616	0x0268	DVB Subtitles	-	2.97	0.00	Nat Geo Wild HD	
644	0x0284	MPEG Audio	\$ 229.99	0.34	Nat Geo Wild HD	87	0x0057	ECM/EMM	-	15.12	0.02	ESPN America HD	615	0x0267	DVB Subtitles	-	2.97	0.00	Nat Geo Wild HD	
640	0x0280	MPEG Audio	\$ 201.12	0.30	Nat Geo HD	85	0x0055	ECM/EMM	-	15.12	0.02	Nat Geo Wild HD	614	0x0266	DVB Subtitles	-	2.97	0.00	Nat Geo Wild HD	
17	0x0011	SDT	-	25.03	0.04	N/A	77	0x004D	ECM/EMM	-	15.12	0.02	ESPN America HD	20	0x0014	TOT	-	2.97	0.00	N/A

Duration: 30 Sec, File Size: 264 MB

ts.TELE-satellite.com/DVB-S2/359/THOR5-11785H-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 2515 MB

www.transponderstream.com/DVB-S2/359/THOR5-11785H-1110.ts

terrestrial

Austria

AT

DVB-T

AT

Network Name

Transmitter

ORS DVB-T WN

Vienna Channel 24

Recording

Thomas Haring

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	1015	0x03F7	Teletext	-	300.82	2.01	ORF1	103	0x0067	PMT	-	18.82	0.13	ORF2 N
1020	0x03FC	MPEG2 Video	-	4736.71	31.72	ORF2 W	1041	0x0411	MPEG Audio	-	175.56	1.18	ATV	102	0x0066	PMT	-	18.82	0.13	ORF2 W
1010	0x03F2	MPEG2 Video	-	3687.03	24.69	ORF1	1021	0x03FD	MPEG Audio	-	175.51	1.18	ORF2 W	101	0x0065	PMT	-	18.82	0.13	ORF1
1040	0x0410	MPEG2 Video	-	2891.25	19.36	ATV	1011	0x03F3	MPEG Audio	-	175.51	1.18	ORF1	1	0x0001	CAT	-	3.76	0.03	N/A
8191	0x1FFF	Null Packets	-	898.46	6.02	N/A	18	0x0012	EIT	-	167.95	1.12	N/A	0	0x0000	PAT	-	3.76	0.03	N/A
1013	0x03F5	AC3 Audio	-	460.59	3.08	ORF1	1014	0x03F6	Private PES	-	37.65	0.25	ORF1	17	0x0011	SDT	-	2.85	0.02	N/A
1023	0x03FF	AC3 Audio	-	460.45	3.08	ORF2 W	1046	0x0416	Private PES	-	37.60	0.25	ATV	21	0x0015	Network Sync	-	2.47	0.02	N/A
1025	0x0401	Teletext	-	300.87	2.01	ORF2 W	1024	0x0400	Private PES	-	37.60	0.25	ORF2 W	16	0x0010	NIT	-	0.19	0.00	N/A
1045	0x0415	Teletext	-	300.82	2.01	ATV	104	0x0068	PMT	-	18.82	0.13	ATV	20	0x0014	TOT	-	0.10	0.00	N/A

www.transponderstream.com/DVB-T/AT/Vienna-Ch24-1109.ts

AT

								Network Name		ORS DVB-T T2		Recording		Thomas Haring						
						Transmitter		Vienna Channel 34		<i>Remark</i>		Radio								
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	1066	0x042A	MPEG Audio	-	175.78	1.06	ServusTV	153	0x0099	PMT	-	18.88	0.11	ServusTV
1060	0x0424	MPEG2 Video	-	3262.60	19.64	ORF Sport Plus	1051	0x041B	MPEG Audio	-	175.69	1.06	PULS 4	152	0x0098	PMT	-	18.88	0.11	ORF Sport Plus
1064	0x0428	MPEG2 Video	-	3196.39	19.24	ServusTV	1061	0x0425	MPEG Audio	-	175.61	1.06	ORF Sport Plus	151	0x0097	PMT	-	18.88	0.11	3SAT
1055	0x041F	MPEG2 Video	-	3188.06	19.19	3SAT	1057	0x0421	MPEG Audio	-	175.61	1.06	3SAT	150	0x0096	PMT	-	18.88	0.11	PULS 4
1050	0x041A	MPEG2 Video	-	3079.65	18.54	PULS 4	1056	0x0420	MPEG Audio	-	175.53	1.06	3SAT	111	0x006F	PMT	-	18.88	0.11	Radio Maria
8191	0x1FFF	Null Packets	-	1477.70	8.90	N/A	1111	0x0457	MPEG Audio	-	138.02	0.83	Radio Maria	0	0x0000	PAT	-	3.71	0.02	N/A
1052	0x041C	Teletext	-	301.26	1.81	PULS 4	18	0x0012	EIT	-	132.66	0.80	N/A	21	0x0015	Network Sync	-	2.80	0.02	N/A
1058	0x0422	Teletext	-	301.18	1.81	3SAT	1069	0x042D	Private PES	-	37.68	0.23	ORF Sport Plus	17	0x0011	SDT	-	1.98	0.01	N/A
1068	0x042C	Teletext	-	263.67	1.59	ServusTV	1059	0x0423	Private PES	-	37.68	0.23	3SAT	16	0x0010	NIT	-	0.25	0.00	N/A
1067	0x042B	MPEG Audio	-	175.78	1.06	ServusTV	1169	0x0491	Private PES	-	37.60	0.23	ServusTV	20	0x0014	Private PES	-	0.16	0.00	N/A

www.transponderstream.com/DVB-T/AT/Vienna-Ch34-1109.ts

Switzerland

CH

DVB-T

CH

Network Name

Transmitter

Zurich Channel 34


5

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	32	0x0020	Teletext	-	264.41	1.62	SF 1	16	0x0010	NIT	-	3.57	0.02	N/A
161	0x00A1	MPEG2 Video	-	4162.72	25.44	RTS Un	102	0x0066	MPEG Audio	-	204.56	1.25	SF info	407	0x0197	PMT	-	3.28	0.02	SF info
167	0x00A7	MPEG2 Video	-	2761.15	16.87	SF info	92	0x005C	MPEG Audio	-	204.56	1.25	SF zwei	403	0x0193	PMT	-	3.28	0.02	SF zwei
163	0x00A3	MPEG2 Video	-	2193.02	13.40	SF zwei	88	0x0058	MPEG Audio	-	204.56	1.25	RSI LA 1	402	0x0192	PMT	-	3.28	0.02	RSI LA 1
162	0x00A2	MPEG2 Video	-	2144.79	13.11	RSI LA 1	84	0x0054	MPEG Audio	-	204.56	1.25	RTS Un	401	0x0191	PMT	-	3.28	0.02	RTS Un
160	0x00A0	MPEG2 Video	-	2023.30	12.36	SF 1	80	0x0050	MPEG Audio	-	204.56	1.25	SF 1	400	0x0190	PMT	-	3.28	0.02	SF 1
18	0x0012	EIT	-	269.77	1.65	N/A	93	0x005D	MPEG Audio	-	86.65	0.53	SF zwei	1	0x0001	CAT	-	2.98	0.02	N/A
53	0x0035	Teletext	-	264.41	1.62	SF info	89	0x0059	MPEG Audio	-	86.65	0.53	RSI LA 1	0	0x0000	PAT	-	2.98	0.02	N/A
41	0x0029	Teletext	-	264.41	1.62	SF zwei	85	0x0055	MPEG Audio	-	86.65	0.53	RTS Un	21	0x0015	Network Sync	-	2.68	0.02	N/A
38	0x0026	Teletext	-	264.41	1.62	RSI LA 1	81	0x0051	MPEG Audio	-	86.65	0.53	SF 1	17	0x0011	SDT	-	2.38	0.01	N/A
35	0x0023	Teletext	-	264.41	1.62	RTS Un	103	0x0067	MPEG Audio	-	86.35	0.53	SF info							

www.transponderstream.com/DVB-T/CH/Zurich-Ch34-1206.ts



www.transponderstream.com

CN**China****CN****Network Name****SZTVM****Recording****TELE-satellite****Transmitter****Shenzhen Channel 52****Remark****DVB Tests**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	256	0x0100	MPEG Audio	-	104.40	1.32	SZTVM01	17	0x0011	SDT	-	22.54	0.29	N/A
161	0x00A1	MPEG2 Video	-	2348.05	29.76	SZTVM02	92	0x005C	MPEG Audio	-	104.40	1.32	SZTVM04	16	0x0010	NIT	-	22.54	0.29	N/A
308	0x0134	MPEG2 Video	-	2235.69	28.33	SZTVM01	67	0x0043	PMT	-	22.54	0.29	SZTVM04	0	0x0000	PAT	-	22.54	0.29	N/A
163	0x00A3	MPEG2 Video	-	1397.22	17.71	SZTVM04	66	0x0042	PMT	-	22.54	0.29	SZTVM03	21	0x0015	Network Sync	-	2.48	0.03	N/A
162	0x00A2	MPEG2 Video	-	1309.02	16.59	SZTVM03	65	0x0041	PMT	-	22.54	0.29	SZTVM02	20	0x0014	TOT	-	0.34	0.00	N/A
84	0x0054	MPEG Audio	-	104.46	1.32	SZTVM02	33	0x0021	PMT	-	22.54	0.29	Data							
88	0x0058	MPEG Audio	-	104.43	1.32	SZTVM03	32	0x0020	PMT	-	22.54	0.29	SZTVM01 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 30 Sec, File Size: 31 MB****ts.TELE-satellite.com/DVB-T/CN/Shenzhen-Ch52-1110.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 301 MB****www.transponderstream.com/DVB-T/CN/Shenzhen-Ch52-1110.ts****DE****Germany****DE****Network Name****MEDIA BROADCAST****Recording****TELE-satellite****Transmitter****Munich Channel 34**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	359	0x0167	Teletext	-	300.81	2.32	RTL2	352	0x0160	PMT	-	5.46	0.04	RTL2
545	0x0221	MPEG2 Video	-	2886.92	22.26	VOX	546	0x0222	MPEG Audio	-	203.69	1.57	VOX	1	0x0001	CAT	-	5.46	0.04	N/A
337	0x0151	MPEG2 Video	-	2648.43	20.42	RTL Television	434	0x01B2	MPEG Audio	-	203.69	1.57	Super RTL	0	0x0000	PAT	-	5.46 <td>0.04</td> <td>N/A</td>	0.04	N/A
353	0x0161	MPEG2 Video	-	2554.82	19.70	RTL2	354	0x0162	MPEG Audio	-	203.68	1.57	RTL2	21	0x0015	Network Sync	-	2.47	0.02	N/A
433	0x01B1	MPEG2 Video	-	2396.65	18.48	Super RTL	338	0x0152	MPEG Audio	-	200.96	1.55	RTL Television	72	0x0048	Private Sections	-	1.54	0.01	N/A
18	0x0012	EIT	-	358.83	2.77	N/A	344	0x0158	DVB Subtitles	-	68.89	0.53	RTL Television	17	0x0011	SDT	-	0.76	0.01	N/A
343	0x0157	Teletext	-	300.84	2.32	RTL Television	432	0x01B0	PMT	-	5.47	0.04	Super RTL	16	0x0010	NIT	-	0.17	0.00	N/A
551	0x0227	Teletext	-	300.81	2.32	VOX	336	0x0150	PMT	-	5.47	0.04	RTL Television	20	0x0014	TOT	-	0.11	0.00	N/A
439	0x01B7	Teletext	-	300.81	2.32	Super RTL	544	0x0220	PMT	-	5.46	0.04	VOX							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 1 Min, File Size: 101 MB****ts.TELE-satellite.com/DVB-T/DE/Munich-Ch34-1109.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 497 MB****www.transponderstream.com/DVB-T/DE/Munich-Ch34-1109.ts****DE****Network Name****ZDF****Recording****TELE-satellite****Transmitter****Munich Channel 35**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	594	0x0252	MPEG Audio	-	201.93	1.60	neo/KI.KA	576	0x0240	PMT	-	5.48	0.04	ZDFinfo
561	0x0231	MPEG2 Video	-	3123.36	24.72	3sat	562	0x0232	MPEG Audio	-	201.93	1.60	3sat	544	0x0220	PMT	-	5.48	0.04	ZDF
545	0x0221	MPEG2 Video	-	2819.02	22.31	ZDF	546	0x0222	MPEG Audio	-	201.93	1.60	ZDF	592	0x0250	PMT	-	5.46	0.04	neo/KI.KA
577	0x0241	MPEG2 Video	-	2332.20	18.46	ZDFinfo	578	0x0242	MPEG Audio	-	135.76	1.07	ZDFinfo	560	0x0230	PMT	-	5.46	0.04	3sat
593	0x0251	MPEG2 Video	-	2184.34	17.29	neo/KI.KA	547	0x0223	MPEG Audio	-	101.84	0.81	ZDF	21	0x0015	Network Sync	-	2.46	0.02	N/A
18	0x0012	EIT	-	372.19	2.95	N/A	563	0x0233	MPEG Audio	-	101.82	0.81	3sat	16	0x0010	NIT	-	0.95	0.01	N/A
599	0x0257	Teletext	-	263.21	2.08	neo/KI.KA	1	0x0001	CAT	-	15.84	0.13	N/A	17	0x0011	SDT	-	0.84	0.01	N/A
567	0x0237	Teletext	-	263.21	2.08	3sat	0	0x0000	PAT	-	15.83	0.13	N/A	20	0x0014	TOT	-	0.22	0.00	N/A
551	0x0227	Teletext	-	263.21	2.08	ZDF	555	0x022B	Private Sections	-	10.00	0.08	N/A							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 1 Min, File Size: 99 MB****ts.TELE-satellite.com/DVB-T/DE/Munich-Ch35-1109.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 483 MB****www.transponderstream.com/DVB-T/DE/Munich-Ch35-1109.ts****DE****Network Name****MEDIA BROADCAST****Recording****TELE-satellite****Transmitter****Munich Channel 48**

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	18	0x0012	EIT	-	260.26	1.98	N/A	0	0x0000	PAT	-	5.46	0.04	N/A
225	0x00E1	MPEG2 Video	-	3492.50	26.63	N24	162	0x00A2	MPEG Audio	-	198.46	1.51	kabel eins	312	0x0138	Private Sections	-	5.01	0.04	N/A
305	0x0131	MPEG2 Video	-	2590.09	19.75	ProSieben	386	0x0182	MPEG Audio	-	198.43	1.51	SAT.1	168	0x00A8	Private Sections	-	5.01	0.04	N/A
385	0x0181	MPEG2 Video	-	2496.26	19.03	SAT.1	306	0x0132	MPEG Audio	-	198.43	1.51	ProSieben	1	0x0001	CAT	-	3.16	0.02	N/A
161	0x00A1	MPEG2 Video	-	2386.04	18.19	kabel eins	226	0x00E2	MPEG Audio	-	198.43	1.51	N24	21	0x0015	Network Sync	-	2.47	0.02	N/A
231	0x00E7	Teletext	-	263.21	2.01	N24	384	0x0180	PMT	-	5.46	0.04	SAT.1	20	0x0014	TOT	-	0.95	0.01	N/A
391	0x0187	Teletext	-	263.18	2.01	SAT.1	304	0x0130	PMT	-	5.46	0.04	ProSieben	17	0x0011	SDT	-	0.80	0.01	N/A
311	0x0137	Teletext	-	263.18	2.01	ProSieben	224	0x00E0	PMT	-	5.46	0.04	N24	16	0x0010	NIT	-	0.17	0.00	N/A
167	0x00A7	Teletext	-	263.18	2.01	kabel eins	160	0x00A0	PMT	-	5.46	0.04	kabel eins							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only**Duration: 1 Min, File Size: 68 MB****ts.TELE-satellite.com/DVB-T/DE/Munich-Ch48-1109.ts****Transponderstream Technical Service File Download for Clients Only****Duration: 5 Min, File Size: 501 MB****www.transponderstream.com/DVB-T/DE/Munich-Ch48-1109.ts**



IL

Network Name

DTT Hungary

Recording

TELE-satellite

Transmitter

Budapest Channel 55

Remark

encrypted

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	DTT Hungary	Recording	TELE-satellite
3101	0x0C1D	H.264 Video	\$	2741.44	13.19	Sport1	3112 0x0C28 AAC Audio	\$ 67.94 0.33	Sport2	3080 0x0C08 PMT - 15.05 0.07 Spektrum
3111	0x0C27	H.264 Video	\$	2155.15	10.37	Sport2	3082 0x0C0A AAC Audio	\$ 67.94 0.33	Spektrum	3070 0x0BFE PMT - 15.05 0.07 Cartoon Network
3011	0x0BC3	H.264 Video	\$	1848.13	8.89	VIASAT3	3052 0x0BEC AAC Audio	\$ 67.94 0.33	Comedy Central	3060 0x0BF4 PMT - 15.05 0.07 Minimax
3081	0x0C09	H.264 Video	\$	1840.69	8.85	Spektrum	3092 0x0C14 AAC Audio	\$ 67.92 0.33	History	3050 0x0BEA PMT - 15.05 0.07 Comedy Central
3071	0x0BFF	H.264 Video	\$	1551.18	7.46	Cartoon Network	3042 0x0BE2 AAC Audio	\$ 67.92 0.33	Universal Channel	3040 0x0BE0 PMT - 15.05 0.07 Universal Channel
3091	0x0C13	H.264 Video	\$	1432.28	6.89	History	3074 0x0C02 AAC Audio	\$ 67.83 0.33	Cartoon Network	3030 0x0BD6 PMT - 15.05 0.07 Muzsika TV
3021	0x0BCD	H.264 Video	\$	1342.33	6.46	Prizma TV	3022 0x0BCE AAC Audio	\$ 67.83 0.33	Prizma TV	3020 0x0BCC PMT - 15.05 0.07 Prizma TV
3051	0x0BEB	H.264 Video	\$	1268.70	6.10	Comedy Central	3062 0x0BF6 AAC Audio	\$ 67.80 0.33	Minimax	3010 0x0BC2 PMT - 15.05 0.07 VIASAT3
3001	0x0BB9	H.264 Video	\$	1190.26	5.72	PRO4	3012 0x0BC4 AAC Audio	\$ 67.80 0.33	VIASAT3	3009 0x0BC1 ECM/EMM - 15.05 0.07 PRO4
3061	0x0BF5	H.264 Video	\$	1174.81	5.65	Minimax	3102 0x0C1E AAC Audio	\$ 67.77 0.33	Sport1	3000 0x0BB8 PMT - 15.05 0.07 PRO4
3031	0x0BD7	H.264 Video	\$	1169.10	5.62	Muzsika TV	3072 0x0C00 AAC Audio	\$ 67.74 0.33	Cartoon Network	0 0x0000 PAT - 15.05 0.07 N/A
3041	0x0BE1	H.264 Video	\$	910.12	4.38	Universal Channel	3044 0x0BE4 AAC Audio	\$ 67.71 0.33	Universal Channel	3019 0x0BCB ECM/EMM - 15.03 0.07 VIASAT3
18	0x0012	EIT	-	514.37	2.47	N/A	3122 0x0C32 AAC Audio	\$ 35.24 0.17	Dorcel TV	1 0x0001 CAT - 15.03 0.07 N/A
3121	0x0C31	H.264 Video	\$	223.99	1.08	Dorcel TV	3700 0x0E74 PMT	- 15.05 0.07	DataService_B	17 0x0011 SDT - 4.50 0.02 N/A
5000	0x1388	ECM/EMM	-	81.50	0.39	N/A	3129 0x0C39 ECM/EMM	- 15.05 0.07	Dorcel TV	21 0x0015 Network Sync - 2.45 0.01 N/A
3094	0x0C16	AAC Audio	\$	68.09	0.33	History	3120 0x0C30 PMT	- 15.05 0.07	Dorcel TV	16 0x0010 NIT - 0.87 0.00 N/A
3032	0x0BD8	AAC Audio	\$	68.00	0.33	Muzsika TV	3110 0x0C26 PMT	- 15.05 0.07	Sport2	20 0x0014 TOT - 0.29 0.00 N/A
3002	0x0BBA	AAC Audio	\$	68.00	0.33	PRO4	3100 0x0C1C PMT	- 15.05 0.07	Sport1	
							3090 0x0C12 PMT	- 15.05 0.07	History	

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 84 MB

ts.TELE-satellite.com/DVB-T/HU/Budapest-Ch55-1112.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 795 MB

www.transponderstream.com/DVB-T/HU/Budapest-Ch55-1112.ts



IL

Network Name

DTT Hungary

Recording

TELE-satellite

Transmitter

Budapest Channel 62

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	DTT Hungary	Recording	TELE-satellite
2131	0x0853	H.264 Video	-	2016.78	9.09	Euronews Teszt	2102 0x0836 AAC Audio	\$ 68.10 0.31	ATV	2100 0x0834 PMT - 15.03 0.07 ATV
2061	0x080D	H.264 Video	\$	1826.25	8.23	Disney Channel	2122 0x084A AAC Audio	\$ 67.99 0.31	Sportklub	2099 0x0833 ECM/EMM - 15.03 0.07 Private Spice
2121	0x0849	H.264 Video	\$	1611.13	7.26	Sportklub	2132 0x0854 AAC Audio	- 67.96 0.31	Euronews Teszt	2090 0x082A PMT - 15.03 0.07 Private Spice
2011	0x07DB	H.264 Video	-	1552.19	7.00	TV2	2082 0x0822 AAC Audio	\$ 67.96 0.31	FEM3	2089 0x0829 ECM/EMM - 15.03 0.07 FEM3
2001	0x07D1	H.264 Video	-	1552.19	7.00	RTL Klub	2074 0x081A AAC Audio	\$ 67.91 0.31	AXN	2080 0x0820 PMT - 15.03 0.07 FEM3
2021	0x07E5	H.264 Video	\$	1393.41	6.28	Cool	2136 0x0858 AAC Audio	- 67.85 0.31	Euronews Teszt	2079 0x081F ECM/EMM - 15.03 0.07 AXN
2101	0x0835	H.264 Video	\$	1375.96	6.20	ATV	2134 0x0856 AAC Audio	- 67.85 0.31	Euronews Teszt	2070 0x0816 PMT - 15.03 0.07 AXN
2081	0x0821	H.264 Video	\$	1212.13	5.46	FEM3	2112 0x0840 AAC Audio	\$ 67.85 0.31	HirTV	2069 0x0815 ECM/EMM - 15.03 0.07 Disney Channel
2041	0x07F9	H.264 Video	\$	1158.78	5.22	HBO	2032 0x07F0 AAC Audio	\$ 67.85 0.31	Film+	2060 0x080C PMT - 15.03 0.07 Disney Channel
2031	0x07EF	H.264 Video	\$	1092.65	4.93	Film+	2022 0x07E6 AAC Audio	\$ 67.85 0.31	Cool	2059 0x080B ECM/EMM - 15.03 0.07 National Geographic
2111	0x083F	H.264 Video	\$	919.30	4.14	HirTV	2012 0x07DC AAC Audio	- 67.85 0.31	TV2	2050 0x0802 PMT - 15.03 0.07 National Geographic
2051	0x0803	H.264 Video	\$	905.75	4.08	National Geographic	2002 0x07D2 AAC Audio	- 67.85 0.31	RTL Klub	2049 0x0801 ECM/EMM - 15.03 0.07 HBO
2071	0x0817	H.264 Video	\$	804.19	3.63	AXN	2072 0x0818 AAC Audio	\$ 67.80 0.31	AXN	2040 0x07F8 PMT - 15.03 0.07 HBO
18	0x0012	EIT	-	531.62	2.40	N/A	2064 0x0810 AAC Audio	\$ 67.75 0.31	Disney Channel	2039 0x07F7 ECM/EMM - 15.03 0.07 Film+
2141	0x085D	H.264 Video	-	530.07	2.39	Info csatorna	2062 0x080E AAC Audio	\$ 67.75 0.31	Disney Channel	2030 0x07EE PMT - 15.03 0.07 Film+
2046	0x07FE	AC3 Audio	\$	422.53	1.90	HBO	2054 0x0806 AAC Audio	\$ 67.55 0.30	National Geographic	2029 0x07ED ECM/EMM - 15.03 0.07 Cool
2013	0x07DD	Teletext	-	300.79	1.36	TV2	2052 0x0804 AAC Audio	\$ 67.55 0.30	National Geographic	2020 0x07E4 PMT - 15.03 0.07 Cool
2003	0x07D3	Teletext	-	225.63	1.02	RTL Klub	2092 0x082C AAC Audio	\$ 66.11 0.30	Private Spice	2010 0x07DA PMT - 15.03 0.07 TV2
2091	0x082B	H.264 Video	\$	224.02	1.01	Private Spice	1 0x0001 CAT	- 15.05 0.07	N/A	2000 0x07D0 PMT - 15.03 0.07 RTL Klub
2113	0x0841	Teletext	\$	188.02	0.85	HirTV	2700 0x0A8C PMT	- 15.03 0.07	DataService_C	0 0x0000 PAT - 15.03 0.07 N/A
2103	0x0837	Teletext	\$	188.02	0.85	ATV	2200 0x0898 PMT	- 15.03 0.07	Neo FM	2119 0x0847 ECM/EMM - 15.00 0.07 HirTV
2043	0x07FB	Teletext	\$	112.77	0.51	HBO	2140 0x085C PMT	- 15.03 0.07	Info csatorna	17 0x0011 SDT - 6.00 0.03 N/A
2042	0x07FA	AAC Audio	\$	101.37	0.46	HBO	2130 0x0852 PMT	- 15.03 0.07	Euronews Teszt	2075 0x081B DVB Subtitles \$ 3.03 0.01 AXN
2044	0x07FC	AAC Audio	\$	101.26	0.46	HBO	2129 0x0851 ECM/EMM	- 15.03 0.07	Sportklub	21 0x0015 Network Sync - 2.45 0.01 N/A
5000	0x1388	ECM/EMM	-	83.40	0.38	N/A	2120 0x0848 PMT	- 15.03 0.07	Sportklub	16 0x0010 NIT - 0.90 0.00 N/A
2202	0x089A	AAC Audio	-	69.27	0.31	Info csatorna	2110 0x083E PMT	- 15.03 0.07	HirTV	20 0x0014 TOT - 0.33 0.00 N/A
							2109 0x083D ECM/EMM	- 15.03 0.07	ATV	

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 89 MB

ts.TELE-satellite.com/DVB-T/HU/Budapest-Ch62-1112.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 848 MB

www.transponderstream.com/DVB-T/HU/Budapest-Ch62-1112.ts

IL

Israel



IL

Network Name

Harashut Hashnia

Recording

Benjamin Ganor

Transmitter

Eilat Channel 29

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	Harashut Hashnia	Recording	Benjamin Ganor
2561	0x0A01	H.264 Video	-	3044.07	22.93	Ch 1	2690 0x0A82 AAC Audio	- 52.89 0.40	Ch 99	2608 0x0A30 DVB Subtitles - 9.23 0.07 Ch 2
2657	0x0A61	H.264 Video	-	3039.96	22.89	Ch 33	94 0x005E PCR	- 45.13 0.34	N/A	17 0x0011 SDT - 6.05 0.05 N/A
2625	0x0A41	H.264 Video	-	2889.05	21.76	Ch 10	2817 0x0B01 AAC Audio	- 36.66 0.28	R01	2610 0x0A32 DVB Subtitles - 3.58 0.03 Ch 2
2593	0x0A21	H.264 Video	-	2295.87	17.29	Ch 2	2993 0x0BB1 AAC Audio	- 36.57 0.28	R12	2609 0x0A31 DVB Subtitles - 3.58 0.03 Ch 2
2689	0x0A81	H.264 Video	-	1062.76	8.00	Ch 99	0 0x0000 PAT	- 30.09 0.23	N/A	2642 0x0A52 DVB Subtitles - 3.15 0.02 Ch 10
8191	0x1FFF	Null Packets	-	261.74	1.97	N/A	2992 0x0BB0 PMT	- 10.04 0.08	R12	2641 0x0A51 DVB Subtitles - 3.15 0.02 Ch 10
18	0x0012	EIT	-	160.12	1.21	N/A	2816 0x0B00 PMT	- 10.04 0.08	R01	2640 0x0A50 DVB Subtitles - 3.15 0.02 Ch 10
2658	0x0A62	AAC Audio	-	53.19	0.40	Ch 33	2688 0x0A80 PMT	- 10.04 0.08	Ch 99	20 0x0014 TOT - 3.03 0.02 N/A
2594	0x0A22	AAC Audio	-	53.12	0.40	Ch 2	2624 0x0A40 PMT	- 10.04 0.08	Ch 10	16 0x0010 NIT - 3.03 0.02 N/A
2562	0x0A02	AAC Audio	-	53.09	0.40	Ch 1	2592 0x0A20 PMT	- 10.04 0.08	Ch 2	21 0x0015 Network Sync - 2.48 0.02 N/A
2626	0x0A42	AAC Audio	-	53.04	0.40	Ch 10	2560 0x0A00 PMT	- 10.04 0.08	Ch 1	
							2656 0x0A60 PMT	- 10.03 0.08	Ch 33	

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 660 MB

www.transponderstream.com/DVB-T/IL/Eilat-Ch29-1110.ts

DZ

Algeria

DZ

Network Name

2 Recording

Morsli Hallam

Transmitter Sidi Bel-Abbes Channel 43

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	5002	0x138A	MPEG Audio	-	132.45	0.63	TV_5	5000	0x1388	PMT	-	7.52	0.04	TV_5				
3001	0x0B89	MPEG2 Video	-	5122.17	24.32	PROGRAMME_NATIONAL				2002	0x07D2	MPEG Audio	-	132.45	0.63	CANAL_ALGERIE	4000	0x0F8A	PMT	-	7.52	0.04	Canal 6-Feed
3001	0x0B89	MPEG2 Video	-	3383.41	16.06	CANAL_ALGERIE				1002	0x03EA	MPEG Audio	-	132.45	0.63	A3	3000	0x0B8A	PMT	-	7.52	0.04	PROGRAMME_NATIONAL
4001	0x0FA1	MPEG2 Video	-	3076.67	14.61	Canal 6-Feed				4002	0x0FA2	MPEG Audio	-	132.40	0.63	Canal 6-Feed	2000	0x07D0	PMT	-	7.52	0.04	CANAL_ALGERIE
6001	0x1771	MPEG2 Video	-	2872.38	13.64	TV_4				3002	0x0B8A	MPEG Audio	-	132.40	0.63	PROGRAMME_NATIONAL	1000	0x03E8	PMT	-	7.52	0.04	A3
5001	0x1389	MPEG2 Video	-	2872.33	13.64	TV_5				18	0x0012	EIT	-	8.70	0.04	N/A	0	0x0000	PAT	-	7.52	0.04	N/A
1001	0x03E9	MPEG2 Video	-	2872.01	13.63	A3				1	0x0001	CAT	-	7.57	0.04	N/A	17	0x0011	SDT	-	1.50	0.01	N/A
6002	0x1772	MPEG Audio	-	132.45	0.63	TV_4				6000	0x1770	PMT	-	7.52	0.04	TV_4	16	0x0010	NIT	-	0.32	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 32 MB

ts.TELE-satellite.com/DVB-T/DZ/SidiBelAbbes-Ch43-1206.ts

NL

The Netherlands

NL

Network Name

Digitenne

Recording

TELE-satellite

Transmitter Amsterdam Channel 27

PID	Hex PID	Stream Type	Encrypted	Kbps	%	Service Name	4042	0x0FCA	MPEG Audio	-	165.78	1.39	TV Drenthe tijdelijk	4130	0x1022	PMT	-	15.04	0.13	BBC Radio 3
4041	0x0FC9	MPEG2 Video	-	2682.41	22.44	TV Drenthe tijdelijk	4112	0x1010	MPEG Audio	\$	165.58	1.39	BBC Radio 1	4120	0x1018	PMT	-	15.04	0.13	BBC Radio 2
4011	0x0FAB	MPEG2 Video	\$	2552.21	21.36	Nickelodeon/TeenNick	182	0x0086	ECM/EMM	-	98.73	0.83	N/A	4110	0x100E	PMT	-	15.04	0.13	BBC Radio 1
4031	0x0FBF	MPEG2 Video	\$	2484.09	20.79	SLAM!TV	18	0x0012	EIT	-	83.55	0.70	N/A	4040	0x0FC8	PMT	-	15.04	0.13	TV Drenthe tijdelijk
4021	0x0FB5	MPEG2 Video	\$	1918.51	16.05	13th Street	20	0x0014	TOT	-	20.01	0.17	N/A	4030	0x0FBE	PMT	-	15.04	0.13	SLAM!TV
4043	0x0FCB	Teletext	-	297.96	2.49	TV Drenthe tijdelijk	4139	0x102B	ECM/EMM	-	15.17	0.13	BBC Radio 3	4020	0x0FB4	PMT	-	15.04	0.13	13th Street
4013	0x0FAD	Teletext	-	223.62	1.87	Nickelodeon/TeenNick	4119	0x1017	ECM/EMM	-	15.17	0.13	BBC Radio 1	4010	0x0FAA	PMT	-	15.04	0.13	Nickelodeon/TeenNick
4012	0x0FAC	MPEG Audio	\$	166.37	1.39	Nickelodeon/TeenNick	4039	0x0F07	ECM/EMM	-	15.17	0.13	SLAM!TV	1	0x0001	CAT	-	15.04	0.13	N/A
4122	0x101A	MPEG Audio	\$	166.18	1.39	BBC Radio 2	4029	0x0FB0	ECM/EMM	-	15.17	0.13	13th Street	0	0x0000	PAT	-	14.91	0.12	N/A
4032	0x0FC0	MPEG Audio	\$	166.11	1.39	SLAM!TV	4019	0x0FB3	ECM/EMM	-	15.17	0.13	Nickelodeon/TeenNick	21	0x0015	Network Sync	-	2.45	0.02	N/A
4022	0x0FB6	MPEG Audio	\$	166.11	1.39	13th Street	4149	0x1035	ECM/EMM	-	15.11	0.13	BBC Radio 4	16	0x0010	NIT	-	1.66	0.01	N/A
4142	0x102E	MPEG Audio	\$	165.98	1.39	BBC Radio 4	4129	0x1021	ECM/EMM	-	15.11	0.13	BBC Radio 2	17	0x0011	SDT	-	1.46	0.01	N/A
4132	0x102A	MPEG Audio	\$	165.91	1.39	BBC Radio 3	4140	0x102C	PMT	-	15.04	0.13	BBC Radio 4							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 32 MB

ts.TELE-satellite.com/DVB-T/NL/Amsterdam-Ch27-1109.ts

PL

Poland

PL

Network Name

TP EmiTel

Recording

Jacek Pawlowski

Transmitter Poznan Channel 46

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	205	0x00CD	Teletext	-	225.71	0.91	TVN	801	0x0321	PMT	-	14.93	0.06	Polsat Sport News	
8191	0x1FFF	Null Packets	-	3521.45	14.15	N/A	105	0x0069	Teletext	-	225.71	0.91	Polsat	501	0x01F5	PMT	-	14.93 <td>0.06</td> <td>TVN Siedem</td>	0.06	TVN Siedem
202	0x0322	H.264 Video	-	3277.97	13.17	Polsat Sport News	505	0x01F9	Teletext	-	225.69	0.91	TVN Siedem	401	0x0191	PMT	-	14.93 <td>0.06</td> <td>TV Puls</td>	0.06	TV Puls
202	0x00CA	H.264 Video	-	2936.74	11.80	TVN	803	0x0323	MPEG Audio	-	196.82	0.79	Polsat Sport News	301	0x012D	PMT	-	14.93 <td>0.06</td> <td>TV4</td>	0.06	TV4
505	0x01F6	H.264 Video	-	2563.76	10.30	TVN Siedem	403	0x0193	MPEG Audio	-	196.82	0.79	TV Puls	201	0x00C9	PMT	-	14.93 <td>0.06</td> <td>TVN</td>	0.06	TVN
102	0x0066	H.264 Video	-	2154.60	8.65	Polsat	303	0x012F	MPEG Audio	-	196.82	0.79	TV4	101	0x0065	PMT	-	14.93 <td>0.06</td> <td>Polsat</td>	0.06	Polsat
302	0x012E	H.264 Video	-	2149.47	8.63	TV4	703	0x02BF	MPEG Audio	-	196.80	0.79	TV6	0	0x0000	PAT	-	14.93 <td>0.06</td> <td>N/A</td>	0.06	N/A
702	0x02BE	H.264 Video	-	1817.12	7.30	TV6	603	0x025B	MPEG Audio	-	196.80	0.79	PULS 2	506	0x01FA	DVB Subtitles	-	3.78 <td>0.02</td> <td>TVN Siedem</td>	0.02	TVN Siedem
402	0x0192	H.264 Video	-	1563.09	6.28	TV Puls	503	0x01F7	MPEG Audio	-	196.80	0.79	TVN Siedem	206	0x00CE	DVB Subtitles	-	3.78 <td>0.02</td> <td>TVN</td>	0.02	TVN
602	0x025A	H.264 Video	-	819.43	3.29	PULS 2	203	0x00CB	MPEG Audio	-	196.80	0.79	TVN	17	0x0011	SDT	-	3.02	0.01	N/A
18	0x0012	EIT	-	571.33	2.30	N/A	103	0x0067	MPEG Audio	-	196.80	0.79	Polsat	20	0x0014	TOT	-	3.01	0.01	N/A
204	0x00CC	AC3 Audio	-	459.22	1.84	TVN	106	0x006A	DVB Subtitles	-	38.60	0.16	Polsat	21	0x0015	Network Sync	-	2.46	0.01	N/A
504	0x01F8	AC3 Audio	-	393.62	1.58	TVN Siedem	701	0x02BD	PMT	-	14.95	0.06	TV6	16	0x0010	NIT	-	0.19	0.00	N/A
305	0x0131	Teletext	-	225.72	0.91	TV4	601	0x0259	PMT	-	14.95	0.06	PULS 2							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 1 Minute, File Size: 366 MB

ts.TELE-satellite.com/DVB-T/PL/Poznan-Ch46-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1130 MB

www.transponderstream.com/DVB-T/PL/Poznan-Ch46-1110.ts



***Transponderstreams are available on
memory cards or by Internet download***

www.transponderstream.com



UK

Network Name

London.

Recording

TELE-satellite

LV31						UK	Transmitter		London Channel 32			Remark			MHEG					
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	6904	0x1AF8	MHEG	-	57.10	0.24	1-2-1 Dating	265	0x0109	PMT	-	7.53	0.03	QUEST
5221	0x0209	MPEG2 Video	-	2767.19	11.65	Challenge	7089	0x1BB1	Data	-	49.23	0.21	Television X	264	0x0108	PMT	-	7.53	0.03	1-2-1 Dating
6273	0x1881	MPEG2 Video	-	2602.78	10.96	bid tv	6354	0x18D2	MPEG Audio	-	41.80	0.18	Teletext Hols	263	0x0107	PMT	-	7.53	0.03	MOBILIZER
6689	0x1A21	MPEG2 Video	-	2225.50	9.37	5 USA	7076	0x1BA4	Audio	-	41.78	0.18	N/A	260	0x0104	PMT	-	7.53	0.03	CITV
5381	0x1505	DVB Subtitles	\$	1898.58	8.00	TOPUP Anytime1	4147	0x1033	ECM/EMM	-	39.66	0.17	N/A	259	0x0103	PMT	-	7.53	0.03	QVC
6049	0x17A1	MPEG2 Video	-	1886.30	7.94	QVC	6522	0x197A	Data	-	34.98	0.15	bid tv	386	0x0182	PMT	-	7.50	0.03	ADULT Section
6737	0x1A51	MPEG2 Video	\$	1812.19	7.63	TOPUP Anytime3	7068	0x1B9C	MHEG	-	33.84	0.14	Home	381	0x017D	PMT	-	7.50	0.03	ADULT redhotTV
6596	0x19C4	MPEG2 Video	-	1753.07	7.38	5*	7081	0x1BA9	Private PES	-	28.99	0.12	TOPUP Anytime2	289	0x0121	PMT	-	7.50	0.03	TOPUP Anytime2
6833	0x1AB1	MPEG2 Video	-	1699.69	7.16	CITV	6908	0x1AFC	MHEG	-	24.95	0.11	MOBILIZER	288	0x0120	PMT	-	7.50	0.03	TOPUP Anytime1
6929	0x1B11	MPEG2 Video	-	1628.73	6.86	QUEST	6521	0x1979	Data	-	24.00	0.10	bid tv	277	0x0115	PMT	-	7.50	0.03	ITV3
6881	0x1AE1	MPEG2 Video	-	1470.72	6.19	ITV3	2870	0x0B36	ECM/EMM	-	22.58	0.10	TOPUP Anytime3	274	0x0112	PMT	-	7.50	0.03	Television X
18	0x0012	EIT	-	623.79	2.63	N/A	2868	0x0B34	ECM/EMM	-	22.58	0.10	TOPUP Anytime1	261	0x0105	PMT	-	7.50	0.03	bid tv
6361	0x18D9	Data	-	250.07	1.05	Teletext Hols	0	0x0000	PAT	-	15.03	0.06	N/A	17	0x0011	SDT	-	6.55	0.03	N/A
6056	0x17A8	MHEG	-	249.14	1.05	QVC	6886	0x1AE6	DVB Subtitles	-	14.49	0.06	ITV3	6640	0x19F0	MHEG	-	4.99	0.02	Gems TV
7084	0x1BAC	DVB Subtitles	\$	135.81	0.57	TOPUP Anytime1	7074	0x1BA2	MHEG	-	10.01	0.04	ESPN	6609	0x19D1	MHEG	-	4.99	0.02	ADULT Fifth
6738	0x1A52	MPEG Audio	\$	135.81	0.57	TOPUP Anytime3	4150	0x1036	ECM/EMM	-	10.01	0.04	N/A	6608	0x19D0	MHEG	-	4.99	0.02	ADULT redhotTV
6674	0x1A12	MPEG Audio	-	135.81	0.57	5*	6480	0x1950	MHEG	-	8.31	0.03	Television X	6544	0x1990	MHEG	-	4.99	0.02	ITV2 +1
6274	0x1882	MPEG Audio	-	135.81	0.57	bid tv	395	0x018B	PMT	-	7.53	0.03	Challenge	6520	0x1978	Data	-	4.99	0.02	bid tv
6114	0x17E2	MPEG Audio	-	135.81	0.57	Capital FM	392	0x0188	PMT	-	7.53	0.03	Capital FM	6456	0x1938	MHEG	-	4.99	0.02	ADULT Section
6098	0x17D2	MPEG Audio	-	135.81	0.57	Heart	391	0x0187	PMT	-	7.53	0.03	Heart	6120	0x17E8	MHEG	-	4.99	0.02	Capital FM
6082	0x17C2	MPEG Audio	-	135.81	0.57	Absolute Radio	390	0x0186	PMT	-	7.53	0.03	Absolute Radio	6104	0x17D8	MHEG	-	4.99	0.02	Heart
6050	0x17A2	MPEG Audio	-	135.81	0.57	QVC	388	0x0184	PMT	-	7.53	0.03	ITV2 +1	6088	0x17C8	MHEG	-	4.99	0.02	Absolute Radio
6930	0x1B12	MPEG Audio	-	135.79	0.57	QUEST	387	0x0183	PMT	-	7.53	0.03	ADULT Fifth	1	0x0001	CAT	-	4.99	0.02	N/A
6882	0x1AE2	MPEG Audio	-	135.79	0.57	ITV3	385	0x0181	PMT	-	7.53	0.03	ADULT Section	6360	0x18D8	MHEG	-	3.02	0.01	Teletext Hols
6834	0x1AB2	MPEG Audio	-	135.79	0.57	CITV	382	0x017E	PMT	-	7.53	0.03	Gems TV	20	0x0014	TOT	-	3.02	0.01	N/A
6690	0x1A22	MPEG Audio	-	135.79	0.57	5 USA	290	0x0122	PMT	-	7.53	0.03	TOPUP Anytime3	16	0x0010	NIT	-	1.17	0.00	N/A
659	0x0293	MPEG Audio	-	135.79	0.57	Challenge	284	0x011C	PMT	-	7.53	0.03	ESPN	6694	0x1A26	DVB Subtitles	-	0.54	0.00	5 USA
6883	0x1AE3	MPEG Audio	-	73.13	0.31	ITV3	279	0x0117	PMT	-	7.53	0.03	5 USA	6678	0x1A16	DVB Subtitles	-	0.54	0.00	5*
6835	0x1AB3	MPEG Audio	-	73.13	0.31	CITV	276	0x0114	PMT	-	7.53	0.03	G.O.L.D.	6838	0x1AB6	DVB Subtitles	-	0.32	0.00	CITV
6691	0x1A23	MPEG Audio	-	73.13	0.31	5 USA	275	0x0113	PMT	-	7.53	0.03	5*	6934	0x1B16	DVB Subtitles	-	0.29	0.00	QUEST
6675	0x1A13	MPEG Audio	-	73.11	0.31	5*	270	0x010E	PMT	-	7.53	0.03	Home							
669	0x029D	MPEG Audio	-	73.11	0.31	Challenge	268	0x010C	PMT	-	7.53	0.03	Teletext Hols							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 1 Min, File Size: 174 MB

ts.TELE-satellite.com/DVB-T2/UK/London-Ch32-1107.ts



UK

Network Name

London.

Recording

TELE-satellite

LV3		UK		Transmitter		London Channel 34		Remark		MHEG	
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name					
201	0x00C9	MPEG2 Video	-	2282.31	12.71	Pick TV+1	1101 0x044D MPEG Audio	-	69.98	0.39	talkSPORT
2401	0x0961	MPEG2 Video	-	1956.14	10.89	Gems TV	103 0x0067 DVB Subtitles	-	27.00	0.15	Sky News
2111	0x083F	MPEG2 Video	-	1903.22	10.60	Dave ja vu	503 0x01F7 DVB Subtitles	-	11.98	0.07	E4+1
301	0x012D	MPEG2 Video	-	1891.21	10.53	Pick TV	204 0x00CC DVB Subtitles	-	10.06	0.06	Pick TV+1
401	0x0191	MPEG2 Video	-	1761.39	9.81	Dave	3013 0x0BC5 MHEG	-	10.01	0.06	Sky News
101	0x0065	MPEG2 Video	-	1652.49	9.20	Sky News	2113 0x0841 DVB Subtitles	-	9.35	0.05	Dave ja vu
611	0x0263	MPEG2 Video	-	1649.21	9.18	price-drop tv	724 0x02D4 PMT	-	7.53	0.04	Create & Craft
501	0x01F5	MPEG2 Video	-	1451.25	8.08	E4+1	723 0x02D3 PMT	-	7.53	0.04	Daystar
2301	0x08FD	MPEG2 Video	-	1374.76	7.65	Create & Craft	722 0x02D2 PMT	-	7.53	0.04	ADULT PARTY
18	0x0012	EIT	-	455.47	2.54	N/A	721 0x02D1 PMT	-	7.53	0.04	CNN
2112	0x0840	MPEG Audio	-	137.94	0.77	Dave ja vu	719 0x02CF PMT	-	7.53	0.04	Pick TV+1
612	0x0264	MPEG Audio	-	137.94	0.77	price-drop tv	715 0x02CB PMT	-	7.53	0.04	COMMUNITY
502	0x01F6	MPEG Audio	-	137.94	0.77	E4+1	711 0x02C7 PMT	-	7.53	0.04	Dave ja vu
402	0x0192	MPEG Audio	-	137.94	0.77	Dave	707 0x02C3 PMT	-	7.53	0.04	price-drop tv
202	0x00CA	MPEG Audio	-	137.94	0.77	Pick TV+1	706 0x02C2 PMT	-	7.53	0.04	talkSPORT
102	0x0066	MPEG Audio	-	137.94	0.77	Sky News	705 0x02C1 PMT	-	7.53	0.04	E4+1
2402	0x0962	MPEG Audio	-	137.92	0.77	Gems TV	704 0x02C0 PMT	-	7.53	0.04	Dave
2302	0x08FE	MPEG Audio	-	137.92	0.77	Create & Craft	703 0x02BF PMT	-	7.53	0.04	Pick TV
302	0x012E	MPEG Audio	-	137.92	0.77	Pick TV	701 0x02BD PMT	-	7.53	0.04	Sky News
							0 0x0000 PAT	-	7.53	0.04	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 1 Min, File Size: 138 MB

ts.TELE-satellite.com/DVB-T/UK/London-Ch34-1107.ts





UK

Network Name

London.

Recording

TELE-satellite

LVS			UK		Transmitter		London Channel 67																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 1 Min, File Size: 172 MB

ts.TELE-satellite.com/DVB-T/UK/London-Ch67-1107.ts



UK

Network Name

South West

Recording

Andy Middleton

LVS 1						UK		Transmitter		Plymouth Channel 45										
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	7204	0x1C24	Data	-	100.08	0.42	BBC ONE	410	0x019A	Data	-	3.04	0.01	BBC FOUR
401	0x0191	MPEG2 Video	-	4592.51	19.41	CBeebies	7205	0x1C25	Data	-	81.06	0.34	BBC ONE	311	0x0137	MHEG	-	3.04	0.01	BBC THREE
201	0x00C9	MPEG2 Video	-	3345.78	14.14	BBC TWO	306	0x0132	MPEG Audio	-	69.68	0.29	CBBC Channel	110	0x006E	MHEG	-	3.04	0.01	BBC ONE
301	0x012D	MPEG2 Video	-	3293.92	13.92	CBBC Channel	505	0x01F9	DVB Subtitles	-	23.95	0.10	BBC NEWS	20	0x0014	TOT	-	3.04	0.01	N/A
101	0x0065	MPEG2 Video	-	2859.14	12.08	BBC ONE	2700	0x0A8C	PMT	-	15.06	0.06	BBC Red Button	910	0x038E	MHEG	-	2.99	0.01	301
501	0x01F5	MPEG2 Video	-	1292.64	5.46	BBC NEWS	2000	0x07D0	PMT	-	15.06	0.06	BBC World Sv.	811	0x032B	Data	-	2.99	0.01	CBeebies
901	0x0385	MPEG2 Video	-	1191.96	5.04	301	1900	0x076C	PMT	-	15.06	0.06	BBC Asian Net.	810	0x032A	MHEG	-	2.99	0.01	CBeebies
7201	0x1C21	MHEG	-	1051.03	4.44	BBC ONE	1800	0x0708	PMT	-	15.06	0.06	BBC R1X	711	0x02C7	Data	-	2.99	0.01	CBBC Channel
601	0x0259	MPEG2 Video	-	966.19	4.08	BBC Parliament	1700	0x06A4	PMT	-	15.06	0.06	BBC Radio 4 Ex	710	0x02C6	MHEG	-	2.99	0.01	CBBC Channel
18	0x0012	EIT	-	661.89	2.80	N/A	1500	0x05DC	PMT	-	15.06	0.06	BBC R5SX	610	0x0262	MHEG	-	2.99	0.01	BBC Parliament
302	0x012E	MPEG Audio	-	263.49	1.11	CBBC Channel	1400	0x0578	PMT	-	15.06	0.06	BBC R5L	510	0x01FE	MHEG	-	2.99	0.01	BBC NEWS
202	0x00CA	MPEG Audio	-	263.49	1.11	BBC TWO	1300	0x0514	PMT	-	15.06	0.06	BBC Radio 4	411	0x019B	MHEG	-	2.99	0.01	BBC FOUR
102	0x0066	MPEG Audio	-	263.49	1.11	BBC ONE	1200	0x04B0	PMT	-	15.06	0.06	BBC Radio 3	310	0x0136	Data	-	2.99	0.01	BBC THREE
402	0x0192	MPEG Audio	-	263.45	1.11	CBeebies	1100	0x044C	PMT	-	15.06	0.06	BBC Radio 2	210	0x00D2	MHEG	-	2.99	0.01	BBC TWO
1302	0x0516	MPEG Audio	-	200.76	0.85	BBC Radio 4	1000	0x03E8	PMT	-	15.06	0.06	BBC Radio 1	605	0x025D	DVB Subtitles	-	2.81	0.01	BBC Parliament
1202	0x04B2	MPEG Audio	-	200.76	0.85	BBC Radio 3	900	0x0384	PMT	-	15.06	0.06	301	450	0x01C2	Private Sections	-	1.20	0.01	N/A
1102	0x044E	MPEG Audio	-	200.72	0.85	BBC Radio 2	700	0x02BC	PMT	-	15.06	0.06	CBBC Channel	350	0x015E	Private Sections	-	1.20	0.01	N/A
1002	0x03EA	MPEG Audio	-	200.72	0.85	BBC Radio 1	600	0x0258	PMT	-	15.06	0.06	BBC Parliament	250	0x00FA	Private Sections	-	1.20	0.01	N/A
951	0x03B7	MPEG Audio	-	198.69	0.84	301	300	0x012C	PMT	-	15.06	0.06	BBC THREE	150	0x0096	Private Sections	-	1.20	0.01	N/A
1802	0x070A	MPEG Audio	-	167.28	0.71	BBC R1X	200	0x00C8	PMT	-	15.06	0.06	BBC TWO	16	0x0010	NIT	-	1.11	0.00	N/A
1702	0x06A6	MPEG Audio	-	167.28	0.71	BBC Radio 4 Ex	100	0x0064	PMT	-	15.06	0.06	BBC ONE	2010	0x07DA	MHEG	-	0.51	0.00	BBC World Sv.
1602	0x0642	MPEG Audio	-	167.28	0.71	BBC 6 Music	0	0x0000	PAT	-	15.06	0.06	N/A	1910	0x0776	MHEG	-	0.51	0.00	BBC Asian Net.
7203	0x1C23	Data	-	150.19	0.63	BBC ONE	1600	0x0640	PMT	-	15.01	0.06	BBC 6 Music	1810	0x0712	MHEG	-	0.51	0.00	BBC R1X
7202	0x1C22	Data	-	150.15	0.63	BBC ONE	800	0x0320	PMT	-	15.01	0.06	CBeebies	1710	0x06AE	MHEG	-	0.51	0.00	BBC Radio 4 Ex
1902	0x076E	MPEG Audio	-	135.91	0.57	BBC Asian Net.	500	0x01F4	PMT	-	15.01	0.06	BBC NEWS	1610	0x064A	MHEG	-	0.51	0.00	BBC 6 Music
952	0x03B8	MPEG Audio	-	132.46	0.56	301	400	0x0190	PMT	-	15.01	0.06	BBC FOUR	1510	0x05E6	MHEG	-	0.51	0.00	BBC R5SX
602	0x025A	MPEG Audio	-	132.46	0.56	BBC Parliament	105	0x0069	DVB Subtitles	-	12.57	0.05	BBC ONE	1410	0x0582	MHEG	-	0.51	0.00	BBC R5L
502	0x01F6	MPEG Audio	-	132.41	0.56	BBC NEWS	205	0x00CD	DVB Subtitles	-	11.33	0.05	BBC TWO	1310	0x051E	MHEG	-	0.51	0.00	BBC Radio 4
2002	0x07D2	MPEG Audio	-	101.97	0.43	BBC World Sv.	405	0x0195	DVB Subtitles	-	10.92	0.05	CBeebies	1210	0x04BA	MHEG	-	0.51	0.00	BBC Radio 3
1502	0x05DE	MPEG Audio	-	101.97	0.43	BBC R5SX	305	0x0131	DVB Subtitles	-	10.09	0.04	CBBC Channel	1110	0x0456	MHEG	-	0.51	0.00	BBC Radio 2
1402	0x057A	MPEG Audio	-	101.92	0.43	BBC R5L	17	0x0011	SDT	-	6.91	0.03	N/A	1010	0x03F2	MHEG	-	0.51	0.00	BBC Radio 1

UK

Network Name

South West

Recording

Andy Middleton

ID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	2361	0x0939	Data	-	72.12	0.33	ITV1	603	0x025B	DVB Subtitles	-	6.22	0.03	ITV1 +1	
520	0x0208	MPEG2 Video	-	3711.36	17.22	ITV1	602	0x025A	MPEG Audio	-	69.80	0.32	ITV1 +1	17	0x0011	SDT	-	4.18	0.02	N/A
560	0x0230	MPEG2 Video	-	2938.76	13.63	Channel 4	542	0x021E	MPEG Audio	-	69.80	0.32	Channel 5	263	0x093B	MHEG	-	3.06	0.01	Channel 4
580	0x0244	MPEG2 Video	-	2793.78	12.96	Channel 4+1	532	0x0214	MPEG Audio	-	69.80	0.32	ITV2	2360	0x0938	MHEG	-	3.06	0.01	Gay Rabbit
540	0x021C	MPEG2 Video	-	1989.43	9.23	Channel 5	522	0x020A	MPEG Audio	-	69.80	0.32	ITV1	2169	0x0879	MHEG	-	3.06	0.01	Rabbit
590	0x024E	MPEG2 Video	-	1925.85	8.93	More 4	2367	0x093F	Data	-	57.92	0.27	Rabbit	21	0x0015	Network Sync	-	3.06	0.01	N/A
570	0x023A	MPEG2 Video	-	1908.40	8.85	E4	305	0x0131	PMT	-	15.87	0.07	Channel 4+1	2168	0x0878	MHEG	-	2.97	0.01	ITV1 +1
600	0x0258	MPEG2 Video	-	1822.36	8.45	ITV1 +1	290	0x0122	PMT	-	15.87	0.07	ITV1 +1	2167	0x0877	MHEG	-	2.97	0.01	E4
530	0x0212	MPEG2 Video	-	1622.99	7.53	ITV2	288	0x0120	PMT	-	15.87	0.07	Gay Rabbit	2164	0x0874	MHEG	-	2.97	0.01	Channel 5
18	0x0012	EIT	-	496.01	2.30	N/A	274	0x0112	PMT	-	15.87	0.07	Rabbit	2162	0x0872	MHEG	-	2.97	0.01	ITV2
581	0x0245	MPEG Audio	-	201.04	0.93	Channel 4+1	270	0x010E	PMT	-	15.87	0.07	More 4	2161	0x0871	MHEG	-	2.97	0.01	ITV1
571	0x023B	MPEG Audio	-	201.04	0.93	E4	1	0x0001	CAT	-	15.87	0.07	N/A	20	0x0014	TOT	-	2.97	0.01	N/A
561	0x0231	MPEG Audio	-	201.04	0.93	Channel 4	0	0x0000	PAT	-	15.87	0.07	N/A	523	0x020B	DVB Subtitles	-	2.23	0.01	ITV1
591	0x024F	MPEG Audio	-	200.95	0.93	More 4	304	0x0130	PMT	-	15.78	0.07	E4	16	0x0010	NIT	-	1.49	0.01	N/A
531	0x0213	MPEG Audio	-	199.00	0.92	ITV2	300	0x012C	PMT	-	15.78	0.07	Channel 4	533	0x0215	DVB Subtitles	-	1.30	0.01	ITV2
601	0x0259	MPEG Audio	-	198.91	0.92	ITV1 +1	289	0x0121	PMT	-	15.78	0.07	Channel 5	543	0x021F	DVB Subtitles	-	0.37	0.00	Channel 5
541	0x021D	MPEG Audio	-	198.91	0.92	Channel 5	258	0x0102	PMT	-	15.78	0.07	ITV2	3004	0x0BBC	Data	-	0.09	0.00	E4
521	0x0209	MPEG Audio	-	198.81	0.92	ITV1	256	0x0100	PMT	-	15.78	0.07	ITV1							
2362	0x093A	Data	-	94.21	0.44	ITV1	573	0x023D	DVB Subtitles	-	10.58	0.05	E4							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 87 MB

ts.TELE-satellite.com/DVB-T/UK/Plymouth-Ch49-1110.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 815 MB

www.transponderstream.com/DVB-T/UK/Plymouth-Ch49-1110.ts

DVB-T2

terrestrial

AT

Austria

DVB-T2

AT

Network Name

ORS

Recording

Thomas Haring

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	205	0x00CD	Teletext	-	300.96	1.23	ORF1 HD	2012	0x07DC	PMT	-	30.13	0.12	HITRADIO OE3	
210	0x00D2	H.264 Video	-	5910.71	24.08	ORF2 HD	202	0x00CA	MPEG Audio	-	167.22	0.68	ORF1 HD	2011	0x07DB	PMT	-	30.13	0.12	OE1
220	0x00DC	H.264 Video	-	5159.69	21.02	ServusTV HD	201	0x00C9	MPEG Audio	-	167.22	0.68	ORF1 HD	2003	0x07DB	PMT	-	30.13	0.12	ServusTV HD
200	0x00C8	H.264 Video	-	4937.20	20.11	ORF1 HD	2130	0x0852	MPEG Audio	-	167.17	0.68	FM4	2002	0x07D2	PMT	-	30.13	0.12	ORF2 HD
8191	0x1FFF	Null Packets	-	4732.38	19.28	N/A	2110	0x083E	MPEG Audio	-	167.17	0.68	OE1	2001	0x07D1	PMT	-	30.13	0.12	ORF1 HD
223	0x00DF	AC3 Audio	-	460.84	1.88	ServusTV HD	221	0x00DD	MPEG Audio	-	167.17	0.68	ServusTV HD	0	0x0000	PAT	-	30.13	0.12	N/A
213	0x00D5	AC3 Audio	-	460.79	1.88	ORF2 HD	212	0x00D4	MPEG Audio	-	167.17	0.68	ORF2 HD	17	0x0011	SDT	-	30.08	0.12	N/A
203	0x00CB	AC3 Audio	-	460.79	1.88	ORF1 HD	211	0x00D3	MPEG Audio	-	167.17	0.68	ORF2 HD	16	0x0010	NIT	-	30.08	0.12	N/A
18	0x0012	EIT	-	312.67	1.27	N/A	32	0x0020	AAC Audio	-	71.38	0.29	HITRADIO OE3	33	0x0021	Private Sections	-	0.98	0.00	N/A
215	0x00D7	Teletext	-	300.96	1.23	ORF2 HD	203	0x07DD	PMT	-	30.13	0.12	FM4							

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 93 MB

ts.TELE-satellite.com/DVB-T2/AT/Vienna-Ch60-1109.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 922 MB

www.transponderstream.com/DVB-T2/AT/Vienna-Ch60-1109.ts

DE

Germany

DVB-T2

DE

Network Name

BR T2

Recording

TELE-satellite

LV312						DE		Transmitter		Munich Channel 50				Receiving				Full Elements			
PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	756	0x02F4	Teletext	-	263.25	1.00	Das Erste	720	0x02D0	PMT	-	3.19	0.01	Bayerisches FS Süd	
737	0x02E1	H.264 Video	-	11775.17	44.90	Das Erste HD	740	0x02E4	Teletext	-	263.25	1.00	Das Erste HD	1	0x0001	CAT	-	3.19	0.01	N/A	
8191	0x1F9F	Null Packets	-	7397.66	28.21	N/A	724	0x02D4	Teletext	-	263.25	1.00	Bayerisches FS Süd	0	0x0000	PAT	-	3.19	0.01	N/A	
753	0x02F1	MPEG2 Video	-	2504.57	9.55	Das Erste	754	0x02F2	MPEG Audio	-	203.70	0.78	Das Erste	752	0x02F0	PMT	-	3.14	0.01	Das Erste	
721	0x02D1	MPEG2 Video	-	1668.03	6.36	Bayerisches FS Süd	722	0x02D2	MPEG Audio	-	203.70	0.78	Bayerisches FS Süd	736	0x02E0	PMT	-	3.14	0.01	Das Erste HD	
739	0x02E3	AC3 Audio	-	470.09	1.79	Das Erste HD	725	0x02D5	MPEG Audio	-	133.22	0.51	Bayerisches FS Süd	20	0x0014	TOT	-	3.00	0.01	N/A	
2172	0x087C	Data	-	400.03	1.53	Das Erste HD	555	0x022B	Private Data	-	27.01	0.10	Bayerisches FS Süd	17	0x0011	SDT	-	0.80	0.00	N/A	
18	0x0012	EIT	-	353.00	1.35	N/A	6070	0x17B6	Private Sections	-	9.99	0.04	N/A	16	0x0010	NIT	-	0.75	0.00	N/A	
738	0x02E2	MPEG Audio	-	266.39	1.02	Das Erste HD	6031	0x17B7	DVB Subtitles	-	3.75	0.01	Das Erste HD								

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 1 Min, File Size: 100 MB

ts.TELE-satellite.com/DVB-T2/DE/Munich-Ch50-1109.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min. File Size: 786 MB

www.transponderstream.com/DVB-T2/DE/Munich-Ch50-1109.ts

UK

United Kingdom

DVB-T2

UK

Network Name

West Midlands

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
6601	0x19C9	H.264 Video	-	10724.36	35.90	BBC One HD
101	0x0065	H.264 Video	-	5581.81	18.69	BBC HD
301	0x012D	H.264 Video	-	5324.88	17.83	Channel 4 HD
201	0x00C9	H.264 Video	-	5320.10	17.81	ITV1 HD
6701	0x1A2D	H.264 Video	-	1048.92	3.51	301 HD
6602	0x19CA	AAC Audio	-	361.08	1.21	BBC One HD
18	0x0012	EIT	-	335.12	1.12	N/A
302	0x012E	AAC Audio	-	161.44	0.54	Channel 4 HD
202	0x00CA	AAC Audio	-	157.26	0.53	ITV1 HD
102	0x0066	AAC Audio	-	157.26	0.53	BBC HD
6702	0x1A2E	AAC Audio	-	142.04	0.48	301 HD

Transmitter	Birmingham	Channel 40
111	0x006F	Data
130	0x0082	SSU
6606	0x19CE	AAC Audio
306	0x0132	AAC Audio
206	0x00CE	AAC Audio
106	0x006A	AAC Audio
6910	0x1AFE	MHEG
205	0x00CD	DVB Subtitles
6700	0x1A2C	PMT
6600	0x19C8	PMT
300	0x012C	PMT
200	0x00C8	PMT

100	0x0064	PMT	-	15.22	0.05	BBC HD
0	0x0000	PAT	-	15.22	0.05	N/A
6900	0x1AF4	PMT	-	14.92	0.05	The Space
305	0x0131	DVB Subtitles	-	13.13	0.04	Channel 4 HD
6605	0x19CD	DVB Subtitles	-	5.97	0.02	BBC One HD
17	0x0011	SDT	-	4.77	0.02	N/A
110	0x006E	MHEG	-	2.98	0.01	BBC HD
105	0x0069	DVB Subtitles	-	2.98	0.01	BBC HD
20	0x0014	TOT	-	2.98	0.01	N/A
6650	0x19FA	Private Sections	-	1.49	0.00	N/A
150	0x0096	Private Sections	-	1.49	0.00	N/A
16	0x0010	NIT	-	0.60	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 116 MB

ts.TELE-satellite.com/DVB-T2/UK/Birmingham-Ch40-1207.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1333 MB

www.transponderstream.com/DVB-T2/UK/Birmingham-Ch40-1207.ts

DVB-T2

UK

Network Name

Cambs & Beds.

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
101	0x0065	H.264 Video	-	11166.93	30.41	BBC HD
6601	0x19C9	H.264 Video	-	9005.26	24.52	BBC One HD
201	0x00C9	H.264 Video	-	7652.08	20.84	ITV1 HD
301	0x012D	H.264 Video	-	7298.90	19.88	Channel 4 HD
102	0x0066	AAC Audio	-	358.66	0.98	BBC HD
18	0x0012	EIT	-	294.15	0.80	N/A
202	0x00CA	AAC Audio	-	157.27	0.43	ITV1 HD
6602	0x19CA	AAC Audio	-	156.01	0.42	BBC One HD
302	0x012E	AAC Audio	-	156.01	0.42	Channel 4 HD

Transmitter	London	Channel 21
106	0x006A	AAC Audio
6606	0x19CE	AAC Audio
206	0x00CE	AAC Audio
306	0x0132	AAC Audio
6605	0x19CD	DVB Subtitles
205	0x00CD	DVB Subtitles
305	0x0131	DVB Subtitles
6600	0x19C8	PMT
300	0x012C	PMT
200	0x00C8	PMT

100	0x0064	PMT	-	15.05	0.04	BBC HD
0	0x0000	PAT	-	15.05	0.04	N/A
17	0x0011	SDT	-	4.56	0.01	N/A
105	0x0069	DVB Subtitles	-	3.01	0.01	BBC HD
20	0x0014	TOT	-	3.01	0.01	N/A
16	0x0010	NIT	-	1.60	0.00	N/A
6650	0x19FA	Private Sections	-	1.31	0.00	N/A
150	0x0096	Private Sections	-	1.31	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 135 MB

ts.TELE-satellite.com/DVB-T2/UK/London-Ch21-1107.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 945 MB

www.transponderstream.com/DVB-T2/UK/London-Ch21-1107.ts

DVB-T2

UK

Network Name

South West

Recording

Andy Middleton

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name
101	0x0065	H.264 Video	-	13880.81	37.17	BBC HD
201	0x00C9	H.264 Video	-	9917.67	26.56	ITV1 HD
6601	0x19C9	H.264 Video	-	6352.93	17.01	BBC One HD
301	0x012D	H.264 Video	-	5728.66	15.34	Channel 4 HD
18	0x0012	EIT	-	297.85	0.80	N/A
102	0x0066	AAC Audio	-	157.67	0.42	BBC HD
6602	0x19CA	AAC Audio	-	157.55	0.42	BBC One HD
202	0x00CA	AAC Audio	-	154.58	0.41	ITV1 HD
302	0x012E	AAC Audio	-	153.21	0.41	Channel 4 HD

Transmitter	Plymouth	Channel 42
130	0x0082	SSU
306	0x0132	AAC Audio
106	0x006A	AAC Audio
6606	0x19CE	AAC Audio
206	0x00CE	AAC Audio
105	0x0069	DVB Subtitles
6605	0x19CD	DVB Subtitles
6600	0x19C8	PMT
300	0x012C	PMT
200	0x00C8	PMT

100	0x0064	PMT	-	15.08	0.04	BBC HD
0	0x0000	PAT	-	15.08	0.04	N/A
205	0x00CD	DVB Subtitles	-	7.20	0.02	ITV1 HD
305	0x0131	DVB Subtitles	-	5.60	0.01	Channel 4 HD
17	0x0011	SDT	-	4.23	0.01	N/A
20	0x0014	TOT	-	2.97	0.01	N/A
16	0x0010	NIT	-	1.60	0.00	N/A
6650	0x19FA	Private Sections	-	1.37	0.00	N/A
150	0x0096	Private Sections	-	1.37	0.00	N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 172 MB

ts.TELE-satellite.com/DVB-T2/UK/Plymouth-Ch42-1109.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 1393 MB

www.transponderstream.com/DVB-T2/UK/Plymouth-Ch42-1109.ts



Transponderstreams are available on memory cards or by Internet download

www.transponderstream.com

RU

Russia

DVB-T2

RU

Network Name

10

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	Transmitter	Moscow Channel 32	Remark	TELE-satellite encrypted
45	0x002D	H.264 Video	\$ 1180.04	12.52	HTB	58 0x003A MPEG Audio	\$ 104.64 1.11 Karusel	34 0x0022 PMT	23.46 0.25 Russia-1
39	0x0027	H.264 Video	\$ 1075.78	11.41	5 kanal S-Pb	50 0x0032 MPEG Audio	\$ 104.64 1.11 Russia-24	16 0x0010 NIT	23.46 0.25 N/A
42	0x002A	H.264 Video	\$ 1068.33	11.34	1-kanal	44 0x002C MPEG Audio	\$ 104.64 1.11 HTB	63 0x003F PMT	23.09 0.24 Sport-2
54	0x0036	H.264 Video	\$ 1063.86	11.29	Russia-24	47 0x002F MPEG Audio	\$ 104.26 1.11 Russia-K	57 0x0039 PMT	23.09 0.24 Russia-24
36	0x0024	H.264 Video	\$ 1010.61	10.72	Russia-2	35 0x0023 MPEG Audio	\$ 104.26 1.11 Russia-2	110 0x006E ECM/EMM	5.21 0.06 Sport-2
62	0x003E	H.264 Video	\$ 916.40	9.72	Sport-2	17 0x0011 SDT	- 25.32 0.27 N/A	109 0x006D ECM/EMM	5.21 0.06 Karusel
59	0x003B	H.264 Video	\$ 810.65	8.60	Karusel	1 0x0001 CAT	- 25.32 0.27 N/A	108 0x006C ECM/EMM	5.21 0.06 Russia-24
33	0x0021	H.264 Video	\$ 571.59	6.06	Russia-1	0 0x0000 PAT	- 25.32 0.27 N/A	56 0x0038 ECM/EMM	5.21 0.06 Russia-2
48	0x0030	H.264 Video	\$ 427.48	4.54	Russia-K	60 0x003C PMT	- 23.46 0.25 Karusel	55 0x0037 ECM/EMM	5.21 0.06 5 kanal S-Pb
61	0x003D	MPEG Audio	\$ 105.01	1.11	Sport-2	49 0x0031 PMT	- 23.46 0.25 Russia-K	53 0x0035 ECM/EMM	5.21 0.06 Russia-K
41	0x0029	MPEG Audio	\$ 105.01	1.11	1-kanal	46 0x002E PMT	- 23.46 0.25 HTB	52 0x0034 ECM/EMM	5.21 0.06 Russia-1
38	0x0026	MPEG Audio	\$ 105.01	1.11	5 kanal S-Pb	43 0x002B PMT	- 23.46 0.25 1-kanal	1360 0x0550 ECM/EMM	4.84 0.05 1-kanal
32	0x0020	MPEG Audio	\$ 105.01	1.11	Russia-1	40 0x0028 PMT	- 23.46 0.25 5 kanal S-Pb	51 0x0033 ECM/EMM	4.84 0.05 HTB
						37 0x0025 PMT	- 23.46 0.25 Russia-2	20 0x0014 TOT	1.49 0.02 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 75 MB

ts.TELE-satellite.com/DVB-T2/RU/Moscow-Ch32-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 335 MB

www.transponderstream.com/DVB-T2/RU/Moscow-Ch32-1203.ts

DVB-T2

RU

Network Name

1

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	Transmitter	Moscow Channel 34	Remark	TELE-satellite
802	0x0322	H.264 Video	- 2149.29	11.21	Карусель	703 0x02BF MPEG Audio	- 132.45 0.69 Россия 24	17 0x0011 SDT	25.00 0.13 N/A
273	0x012E	H.264 Video	- 2148.10	11.21	Россия 2	603 0x025B MPEG Audio	- 132.45 0.69 Россия K	1101 0x044D PMT	15.18 0.08 Радио Россия
702	0x02BE	H.264 Video	- 2146.91	11.20	Россия 24	503 0x01F7 MPEG Audio	- 132.45 0.69 Первый канал	1001 0x03E9 PMT	15.18 0.08 Маяк
402	0x0192	H.264 Video	- 2146.02	11.20	HTB	403 0x0193 MPEG Audio	- 132.45 0.69 HTB	701 0x02BD PMT	15.18 0.08 Россия 24
202	0x00CA	H.264 Video	- 2145.42	11.19	Россия 1	303 0x012F MPEG Audio	- 132.45 0.69 Россия 2	601 0x0259 PMT	15.18 0.08 Россия K
102	0x0066	H.264 Video	- 2145.42	11.19	Первый канал	203 0x00CB MPEG Audio	- 132.45 0.69 Россия 1	501 0x01F5 PMT	15.18 0.08 Первый канал
602	0x025A	H.264 Video	- 2144.53	11.19	Россия K	103 0x0067 MPEG Audio	- 132.45 0.69 Первый канал	401 0x0191 PMT	15.18 0.08 HTB
502	0x01F6	H.264 Video	- 2144.53	11.19	Пятый канал	604 0x025C Teletext	- 75.90 0.40 Россия K	901 0x0385 PMT	14.88 0.08 Вести FM
1102	0x044E	MPEG Audio	- 137.51	0.72	Радио Россия	204 0x00CC Teletext	- 75.60 0.39 Россия 1	801 0x0321 PMT	14.88 0.08 Карусель
1002	0x03EA	MPEG Audio	- 137.51	0.72	Маяк	104 0x0068 Teletext	- 75.60 0.39 Первый канал	301 0x012D PMT	14.88 0.08 Россия 2
902	0x0386	MPEG Audio	- 137.51	0.72	Вести FM	18 0x0012 EIT	- 52.09 0.27 N/A	201 0x00C9 PMT	14.88 0.08 Россия 1
803	0x0323	MPEG Audio	- 132.45	0.69	Карусель	1 0x0001 CAT	- 25.30 0.13 N/A	101 0x0065 PMT	14.88 0.08 Первый канал
						0 0x0000 PAT	- 25.30 0.13 N/A	20 0x0014 TOT	2.98 0.02 N/A

TELE-satellite Technical Service File Download for TELE-satellite Cooperation Partners Only

Duration: 30 Sec, File Size: 75 MB

ts.TELE-satellite.com/DVB-T2/RU/Moscow-Ch34-1203.ts

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 725 MB

www.transponderstream.com/DVB-T2/RU/Moscow-Ch34-1203.ts

ISDB-TB

terrestrial

BR

Brasil

ISDB-TB

BR

Network Name

Rede Record

Recording

TELE-satellite

PID	Hex PID	Stream Type	Encrypted kbps	%	Service Name	Transmitter	Sao Paulo Channel 20	Remark	1Seg (Mobile TV), HD
273	0x0111	H.264 Video	- 15304.88	83.69	Record HD	274 0x0112 AAC Audio	- 104.10 0.57 Record HD	512 0x0200 PCR	7.52 0.04 N/A
8191	0x1FFF	Null Packets	- 1303.08	7.13	N/A	275 0x0113 AAC Audio	- 103.95 0.57 Record HD	39 0x0027 ?	6.02 0.03 N/A
641	0x0281	H.264 Video	- 307.79	1.68	Record 1Seg	643 0x0283 AAC Audio	- 65.84 0.36 Record 1Seg	288 0x0120 Private PES	1.50 0.01 Record HD
3000	0x0BB8	?	- 201.55	1.10	N/A	18 0x0012 EIT	- 60.01 0.33 N/A	36 0x0024 ?	1.50 0.01 N/A
3106	0x0C22	?	- 200.06	1.09	N/A	768 0x0300 PCR	- 39.51 0.22 N/A	16 0x0010 NIT	1.50 0.01 N/A
3104	0x0C20	?	- 200.06	1.09	N/A	257 0x0101 PMT	- 30.10 0.16 Record HD	656 0x0290 Private PES	1.50 0.01 Record 1Seg
3102	0x0C1E	?	- 200.06	1.09	N/A	908 0x038C Data	- 20.01 0.11 Record 1Seg	17 0x0011 SDT	1.00 0.01 N/A
276	0x0114	AAC Audio	- 104.10	0.57	Record HD	0 0x0000 PAT	- 15.05 0.08 N/A	20 0x0014 TOT	0.30 0.00 N/A
						8136 0x1FC8 PMT	- 7.52 0.04 Record 1Seg	508 0x01FC Private Sections	0.15 0.00 N/A

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 945 MB

www.transponderstream.com/ISDB-TB/BR/SaoPaulo-Ch19-1108.ts

ISDB-TB**BR**

Network Name

BAND

Recording

TELE-satellite

Transmitter

Sao Paulo Channel 23

Remark

1Seg (Mobile TV), HD

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	BAND	Recording	TELE-satellite
259	0x0103	H.264 Video	-	10554.91	85.61	BAND HDTV	511 0x01FF PCR	-	41.65 0.34 N/A	107 0x006B Private PES
273	0x0111	H.264 Video	-	7102.65	64.56	Rede TV! HD	18 0x0012 EIT	-	28.50 0.26 N/A	39 0x0027 ?
8191	0x1FFF	Null Packets	-	1071.43	8.69	N/A	32 0x0020 PMT	-	15.83 0.13 BAND HDTV	16 0x0010 NIT
273	0x0111	H.264 Video	-	305.29	2.48	BAND 1SEG	0 0x0000 PAT	-	15.82 0.13 N/A	17 0x0011 SDT
256	0x0100	AAC Audio	-	111.87	0.91	BAND HDTV	512 0x0200 PCR	-	7.52 0.06 N/A	20 0x0014 TOT
257	0x0101	AAC Audio	-	105.71	0.86	BAND HDTV	8136 0x1FC8 PMT	-	3.96 0.03 BAND 1SEG	
18	0x0012	EIT	-	49.96	0.41	N/A	39 0x0027 ?	-	3.00 0.02 N/A	

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 502 MB

www.transponderstream.com/ISDB-TB/BR/SaoPaulo-Ch22-1108.ts**ISDB-TB****BR**

Network Name

Rede TV!

Recording

TELE-satellite

Transmitter

Sao Paulo Channel 29

Remark

3D (side-by-side)

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	BAND	Recording	TELE-satellite
501	0x0111	H.264 Video	-	7102.65	64.56	Rede TV! HD	530 0x0212 AAC Audio	-	66.63 0.61 Rede TV! 1Seg	8136 0x1FC8 PMT
289	0x0121	H.264 Video	-	2154.51	19.58	Rede TV! 3D	18 0x0012 EIT	-	28.50 0.26 N/A	39 0x0027 ?
8191	0x1FFF	Null Packets	-	980.45	8.91	N/A	512 0x0200 PCR	-	27.57 0.25 N/A	533 0x0215 Private PES
529	0x0211	H.264 Video	-	324.42	2.95	Rede TV! 1Seg	768 0x0300 PCR	-	16.37 0.15 N/A	36 0x0024 ?
290	0x0122	AAC Audio	-	84.67	0.77	Rede TV! 3D	256 0x0100 PCR	-	16.33 0.15 N/A	16 0x0010 NIT
275	0x0113	AAC Audio	-	80.15	0.73	Rede TV! HD	258 0x0102 PMT	-	8.94 0.08 Rede TV! 3D	278 0x0116 Private PES
274	0x0112	AAC Audio	-	79.89	0.73	Rede TV! HD	0 0x0000 PAT	-	8.94 0.08 N/A	17 0x0011 SDT
							257 0x0101 PMT	-	8.88 0.08 Rede TV! HD	20 0x0014 TOT

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 602 MB

www.transponderstream.com/ISDB-TB/BR/SaoPaulo-Ch28-1108.ts**ISDB-TB****BR**

Network Name

Rede Vida

Recording

TELE-satellite

Transmitter

Sao Paulo Channel 39

Remark

1Seg, HD

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	BAND	Recording	TELE-satellite
501	0x01F5	H.264 Video	-	9661.50	92.77	Rede Vida HD	521 0x0209 PCR	-	39.52 0.38 N/A	531 0x0213 Private PES
500	0x01F4	H.264 Video	-	273.41	2.63	Rede Vida 1Seg	0 0x0000 PAT	-	37.65 0.36 N/A	36 0x0024 ?
511	0x01FF	AAC Audio	-	133.21	1.28	Rede Vida HD	8191 0x1FFF Null Packets	-	35.45 0.34 N/A	530 0x0212 Private PES
510	0x01FE	AAC Audio	-	70.60	0.68	Rede Vida 1Seg	520 0x0208 PCR	-	34.63 0.33 N/A	17 0x0011 SDT
513	0x0201	AAC Audio	-	52.93	0.51	Rede Vida HD	80 0x0050 PMT	-	7.57 0.07 Rede Vida HD	16 0x0010 NIT
18	0x0012	EIT	-	50.06	0.48	N/A	8136 0x1FC8 PMT	-	7.52 0.07 Rede Vida 1Seg	20 0x0014 TOT
							39 0x0027 ?	-	2.97 0.03 N/A	

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 418 MB

www.transponderstream.com/ISDB-TB/BR/SaoPaulo-Ch38-1108.ts**ISDB-TB****BR**

Network Name

TV Aparecida

Recording

TELE-satellite

Transmitter

Sao Paulo Channel 41

Remark

1Seg, HD

PID	Hex PID	Stream Type	Encrypted	kbps	%	Service Name	Transmitter	BAND	Recording	TELE-satellite
101	0x0065	H.264 Video	-	10251.25	83.04	TV Aparecida HD	102 0x0066 AAC Audio	-	66.83 0.54 TV Aparecida HD	1 0x0001 CAT
8191	0x1FFF	Null Packets	-	1532.18	12.41	N/A	100 0x0064 PCR	-	60.18 0.49 N/A	17 0x0011 SDT
1001	0x03E9	H.264 Video	-	268.73	2.18	TV Aparecida 1SEG	1000 0x03E8 PCR	-	34.61 0.28 N/A	20 0x0014 TOT
1002	0x03EA	AAC Audio	-	70.73	0.57	TV Aparecida 1SEG	8136 0x1FC8 PMT	-	18.81 0.15 TV Aparecida 1SEG	16 0x0010 NIT
							99 0x0063 PMT	-	18.81 0.15 TV Aparecida HD	36 0x0024 ?
							0 0x0000 PAT	-	18.81 0.15 N/A	

Transponderstream Technical Service File Download for Clients Only

Duration: 5 Min, File Size: 340 MB

www.transponderstream.com/ISDB-TB/BR/SaoPaulo-Ch40-1108.ts

DVB-T

V: MPEG-2

A: MPEG-1 Level 2

Algeria
Albania
Australia
Austria
Belgium
Croatia**
Denmark**
Finland**
France*
French Guyana
Germany*
Greece*
Indonesia
Italy**
Luxembourg
Morocco
Namibia
Netherlands
Qatar
Sweden*/**
Switzerland
Tunisia

* some
V: H.264

** some DVB-T2

* some
DVB-T MPEG-2

** some DVB-T2

DVB-T

V: H.264

A: MPEG-4 AAC

Azerbaijan
Belarus*
Bulgaria
Burundi
Central African Republic
Colombia
Czech**
Estonia**
Ghana
Guinea
Hungary**
Iceland
Ireland
India
Iran
Israel
Latvia
Lithuania
Macedonia
Malaysia
Mauritius
New Zealand
Nigeria
Norway
Panama
Poland
Portugal
Romania
Rwanda
Slovakia
Slovenia**
Spain**
Tanzania
Uganda
Ukraine*
Vietnam
Zambia

ISDB-TB

V: H.264

A: MPEG-4 AAC

Argentina
Belize
Bolivia
Brazil
Costa Rica
Chile
Ecuador
Paraguay
Peru
Philippines
Uruguay
Venezuela

ISDB

V: MPEG-2

A: MPEG-2 AAC
Japan

DVB-T2

V: H.264

A: MPEG-4 AAC


Kenya
Russia
Serbia
South Africa
Sri Lanka
Uganda
UK

ATSC

V: MPEG-2

A: AC-3

Canada
Dominican R.
Guatemala
Honduras
Mexico
USA

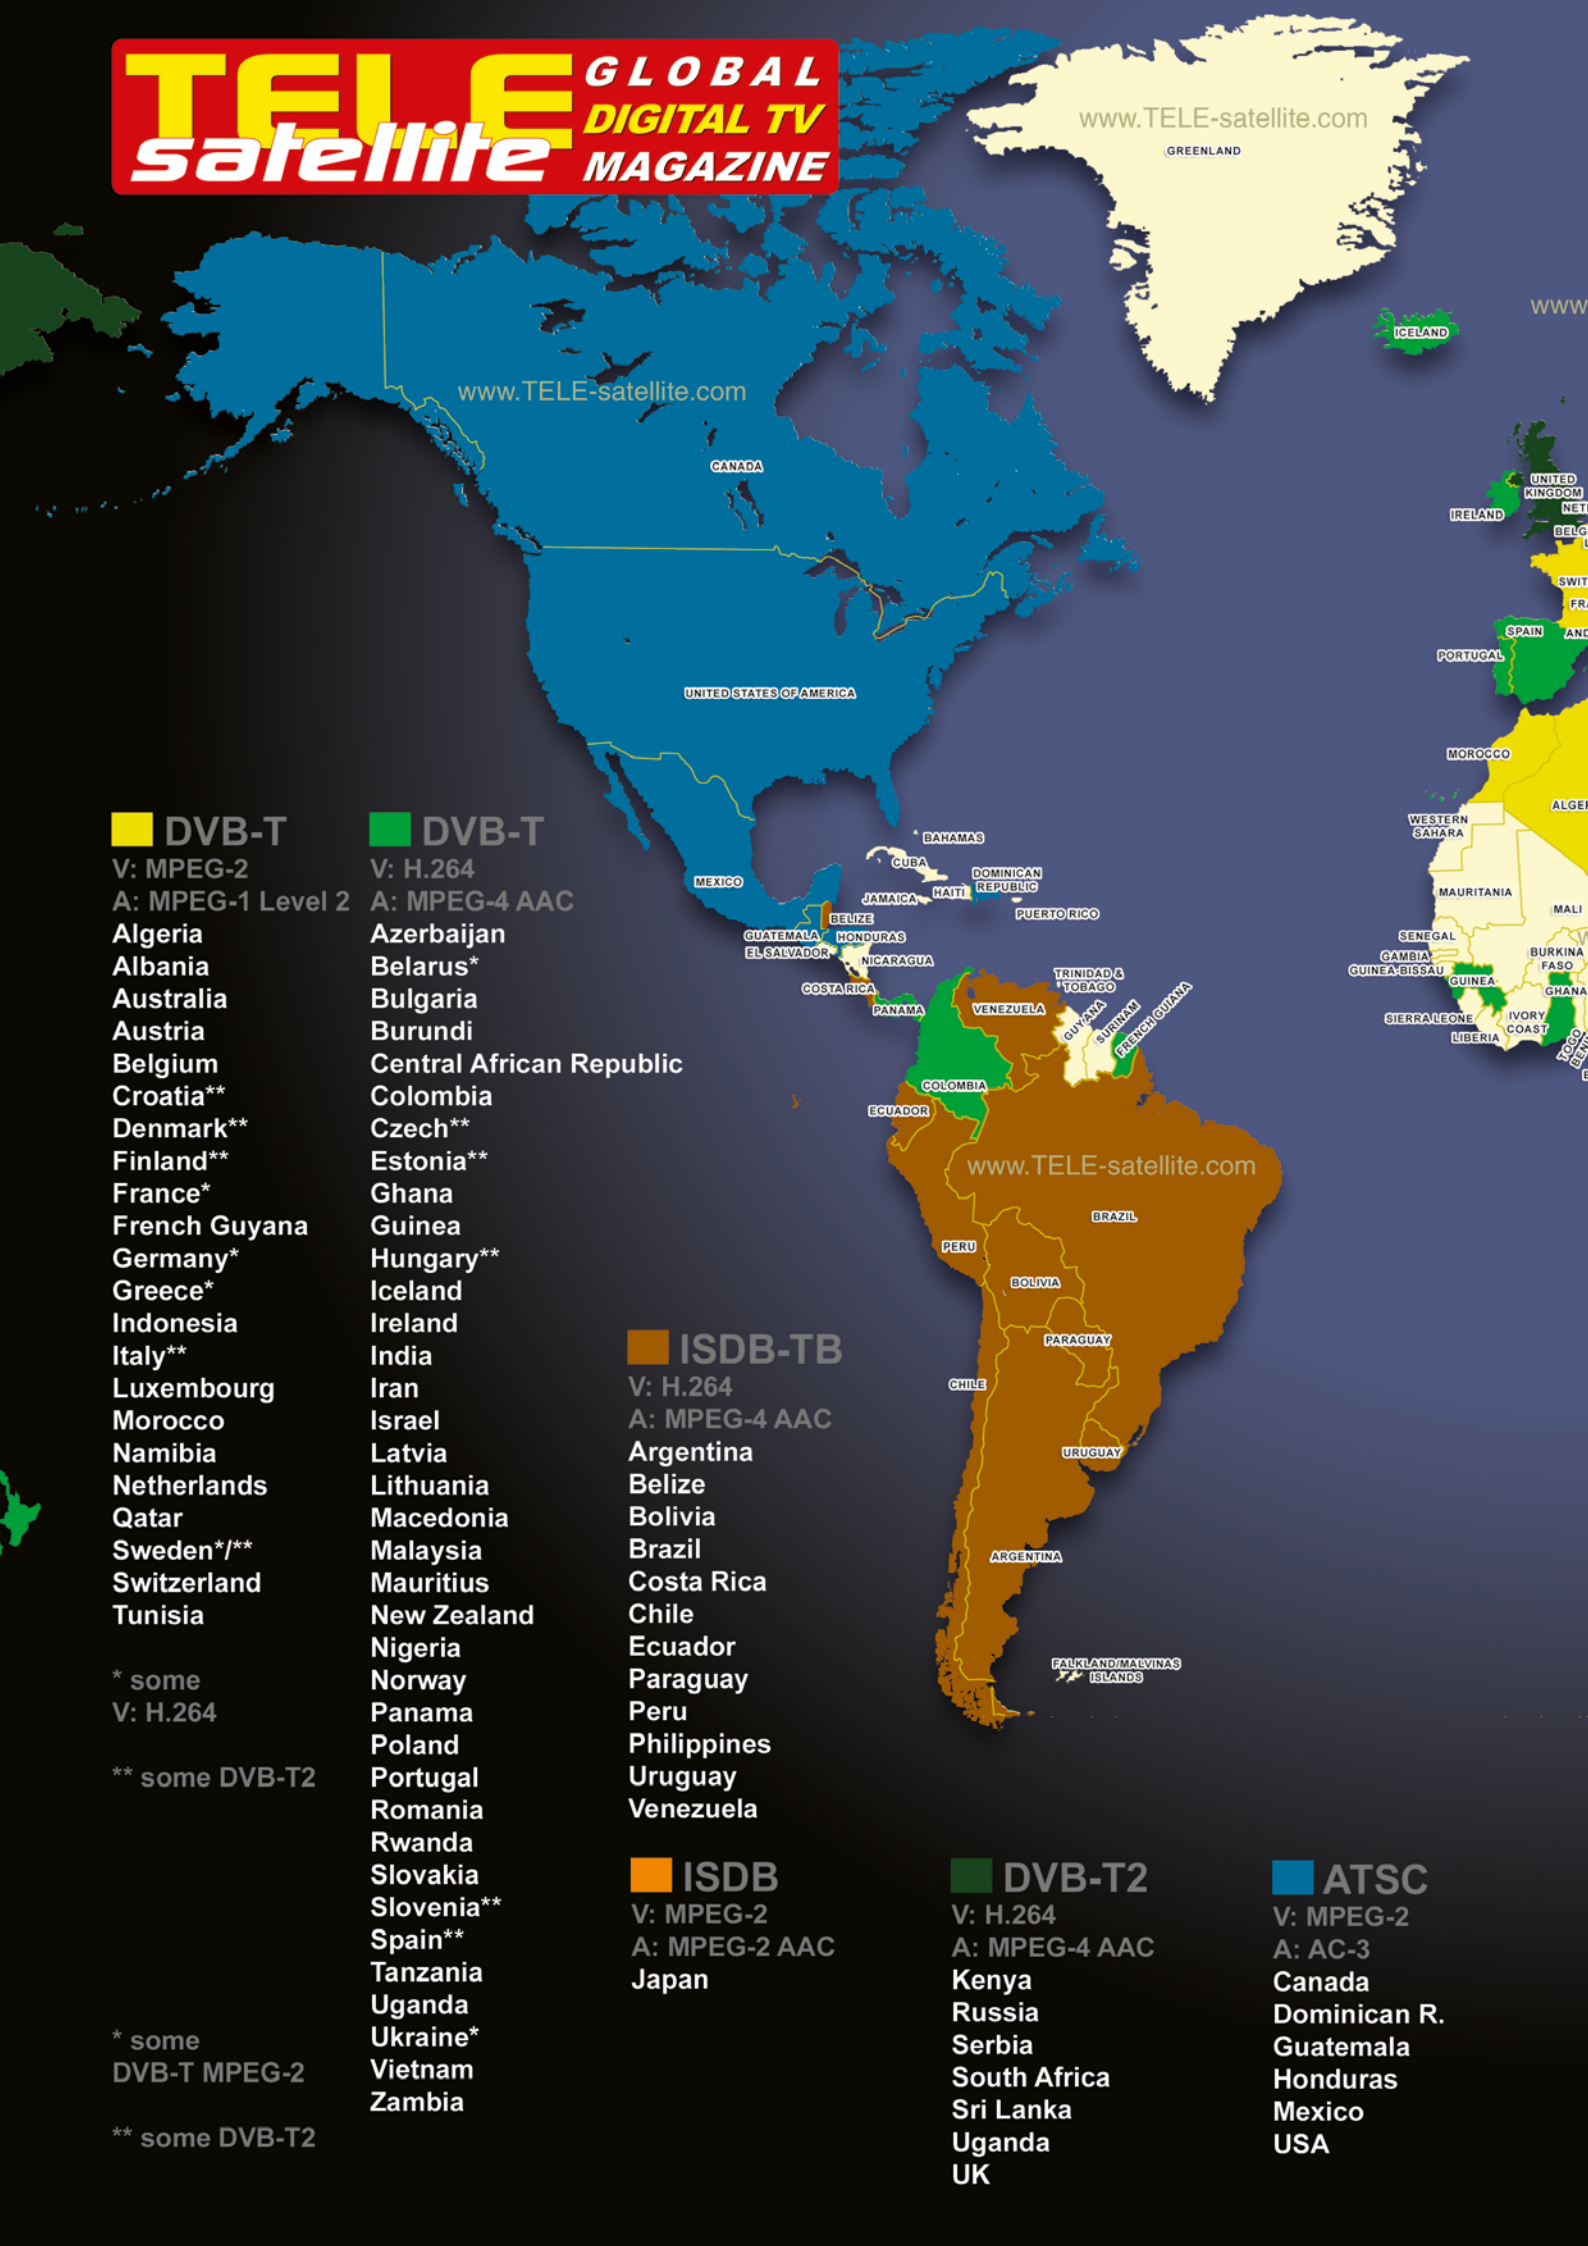

www.TELE-satellite.com

www.TELE-satellite.com

www.TELE-satellite.com

www.TELE-satellite.com

www.TELE-satellite.com

Copyright 2012 by
TELE-satellite International
Global Digital TV Magazine

Digital Terrestrial Television of the World

Dominant System per Country

© 2012 by

TELE-satellite International

The World's Largest Digital TV Trade Magazine

www.TELE-satellite.com

DTMB

V: H.264

A: MPEG-4 AAC

China*

HongKong

* some

V: MPEG2

TELE

**3DTV
HDTV
IP/Web
satellite**

INTERNATIONAL

WO

TELE-satellite serves WESTERN EUROPE

with its English, German and French language editions

TELE-satellite TELE-satellit TÉLÉ-satellite



ENGLISH



GERMAN
Deutsch



FRENCH
Français

TELE-satellite serves EASTERN EUROPE

with its Russian, Polish and Turkish language editions

ТЕЛЕ-сателлайт TELE-satelita TELE-satellite



RUSSIAN
Русский



POLISH
Polski



TURKISH
Türkçe

TELE-satellite serves MIDDLE EAST

with its Arabic, Farsi and Hebrew language editions

تيلي-ستلايت TELE-satellite טלה-סאטלייט



ARABIC
العربية



FARSI
فارسی



HEBREW
עברית

TELE-satellite serves NORTHERN AFRICA

with its Arabic, French and Portuguese language editions

تيلي-ستلايت TÉLÉ-satellite TELE-satélite



ARABIC
العربية



FRENCH
Français



PORTUGUESE
Português

TELE-satellite serves SOUTHERN AFRICA

with its English, French and Portuguese language editions

TELE-satellite TÉLÉ-satellite TELE-satélite



ENGLISH



FRENCH
Français



PORTUGUESE
Português

www.TELE-satellite.com

RLD WIDE



TELE-satellite serves
NORTHERN AMERICA
with its English, Spanish and
French language editions

TELE-satellite TELE-satélite TÉLÉ-satellite



ENGLISH



SPANISH
Español



FRENCH
Français

TELE-satellite serves
ASIA

with its Chinese, Indonesian and
English language editions

国际卫星电视

TELE-satellit

TELE-satellite



CHINESE
中文



INDONESIAN
Bahasa Indonesia



ENGLISH

TELE-satellite serves
SOUTHERN AMERICA

with its Spanish, Portuguese and
French language editions

TELE-satélite TELE-satélite TÉLÉ-satellite



SPANISH
Español



PORTUGUESE
Português



FRENCH
Français

Missed TELE-satellite?



Read
Previous Issues

www.TELE-satellite.com

ONLINE



TELE
satellite

Published worldwide since 1981
and read in more than
180 countries

Global DIGITAL TV Magazine

▲
DEU
USA
ITA
ENG
ESP
BRA
IND
FRA
CHI
ARA
RUS
ALG
▼

TEST REPORTS ●
about innovative products
Best Digital TV Companies ●
OVERVIEW



● COMPANY REPORTS
about Leading Digital TV Equipment
Manufacturers, Distributors, Dealers,
Wholesalers, Installers

www.TELE-satellite.com



30 Years Ago

Satellite News 1982:


The future 4th TV Channel from France will be transmitted via the DTH satellite TDF1, which will be parked at orbital position 19°. The terrestrial stations in France, which are now transmitting TF1 in the VHF band will then re-transmit the 4th channel in SECAM color. In July 1982 the main contract for building the DTH satellite TDF1 and TV-SAT-1 have been signed. They are expected to be operational in spring 1985.

Switzerland: In a surprise move the Swiss government refused the concession to build the Swiss TelSat DTH. This delays the start of this satellite to at least 1986. Regardless of this the English language program from OTS-2 and the Russian language program from GORIZONT are being fed into the Swiss cable tv network of Rediffusion. Both channels are listed in Swiss tv guide magazines.

Eindrücke von der fera

Nicht ganz so groß und aufwendig wie die Berliner Funkausstellung (TAV-4) aber immer noch beeindruckend: die jährlich abgehaltene größte schweizer Fernseh- und Radio Ausstellung in Oerlikon, einem Industrieviertel von Zürich.

Gezeigt wurden auf der fera hauptsächlich Geräte der Unterhaltungselektronik. Eine Überraschung die vielen ausstellten Stereo-Fernsehergeräte: obwohl das schweizer Fernsehen gar keine Stereosendungen ausstrahlt, sind schon etwa die Hälfte aller in der Schweiz verkauften Großfernseher Stereogeräte. Ausgenutzt werden können die Geräte aber durchaus: das ZDF ist in vielen Teilen des Landes direkt und im Inneren auch oft über die vielen Kabelnetze zu empfangen.



Unter letzteren hat sich die in Zürich heimotete Kabelgesellschaft "Rediffusion" einen Namen gemacht: auf der fera wurde das von OTS empfangene englische Satellitenprogramm als regulärer Bestandteil des Rediffusion-Angebots gezeigt.


Trotz eifriger Sucher konnte eine



funktionsfähige Satellitenempfangsstelle aber nicht ausfindig gemacht werden. Lediglich autronic stellte einen nicht betriebsbereiten Parabolspiegel aus. Eine andere, amerikanische Firma bot Prospekte ebenfalls der "Ersten" privaten Satelliten-TV-Empfangsanlage an, was allerdings Fragen auftauchen ließ, wieviele "Erste" Empfangsanlagen es noch geben wird... Immer noch blieb unklar, ob nun endlich eine seriennäßig herstellbare Weiche zur Aufteilung der Zirkularpolarisation entwickelt ist - erst dann ist Sat-TV in greifbare Nähe gerückt.

So nebenbei konnte noch die momentan grassierende ID-Einblenderei fotogra-

fiert werden: Nicht nur die RAI und die anderen italienischen Sender, nicht nur das ZDF rechts oben und seit neuestem die ARD links oben, nein, auch das italienischsprachige schweizer Fernsehen TSI blendet sein Zeichen "rtsi" in die Ecken ein:



etwa alle 15 sec springt die Einblendung nacheinander in alle vier Ecken. Wahrlich, ein unschätzbare Hilfsmittel beim Fernseh-DX! Der Berichterstatter schlägt vor, noch zusätzlich den Sender und den Kanal einzublenden, am besten auch noch gleich die Uhrzeit und das Datum...



TELE-audiovision 10 1982



Interessant die vom Rundfunk okkupierte Halle 3: auf der einen Seite probte das Fernsehen mit Latendarstellern, auf der anderen Hallenseite produzierte das neue dritte Programm der Westschweiz sein französischsprachiges Stereo-Pop-Programm "Coeur 3" live.



Live-Produktion des "Coeur 3" Programms, das während der fera ausnahmsweise über den Sender Dillberg auf 100,6 MHz ausgestrahlt wurde (regulär auf 100,7 MHz über La Dole). Für die Messebesucher wurden viele der Musiktitel simultan über Video gezeigt - daher die TV-Geräte im Hintergrund.

Dazwischen gab's Stände der SRG und Post. Die vielen Aufkleber von/für Programme der SRG (mehr als zehn verschiedene konnten gezählt werden) ließen den Berichterstatter stutzen: hat die SRG es seit neuestem nötig, für ihr Programm zu werben? Offenbar - in weiser Voraussicht auf das kommende private Lokalradio und evtl Fernsehen beginnt die SRG schon jetzt mit Imagebildung.

DX - Anlagen - Vorstellung

Unseren Lesern mittlerweile wohl bekannt durch seine immer wieder überraschenden Super-TV-DX-Erfolge, stellt sich der gut deutsch sprechende Holländer Rijn Muntjewerff hier selbst vor:

Ich bin 49 Jahre alt, verheiratet und habe zwei Söhne mit 20 und 24 Jahren. Von Beruf bin ich Haus- und Automotoren. TV-DX mache ich schon seit 1961. Damals sah ich eines Tages unerwartet auf Kanal E-2 einen Stierkampf: direkt aus Madrid vom spanischen Fernsehen TVE. Das war wunderbar und beeindruckend. An den folgenden Tagen waren damals Sender von RTP, RAI, JRT, TSS, YLE und viele andere zu sehen.

Das traf mich alles wie ein Bienenstich - und der Stich hält heute noch an!

Am Anfang benutzte ich zum DXen nur die sowieso schon vorhandene und fest installierte Kanal E-4-Element-Antenne, eigentlich für den holländischen Sender Lopik gedacht.

Erst später kamen besondere Mehrelement-Antennen hinzu, z.B. die "Tewee"-Antennen, die übrigens heute noch fabriziert werden. Auch für UHF schaffte ich mir Antennen an, damals u.a. die Hirschmann Fesa 718UN60, die es heute noch gibt.

Später, als die Technik fortschritt, konnte ich auch Verstärker installieren, vor allem von Polyttron und Schrader. Polyttron wegen seiner niedrigen Rauschzahl und Schrader hat Verstärker im Angebot, die kanalweise fernabgestimmt werden können.

1970 war es soweit und ich konnte den auf den Fotos erkennbaren 22,5m hohen Antennemast im Garten aufstellen. Auf diesem sind heute 11 Antennen angebracht, auf dem Hausdach sind noch weitere drei Antennen installiert.

Auf dem Mast sind von oben nach unten die folgenden Antennen montiert:

Zwillingsantenne Fuba XC91E
dto. Fuba XC91C
dto. Fuba XC91A



TELE-audiovision 10 1982

54

WISI FX24
WISI FS15 vertikal
Fuba UKA-9

Das Alles auf dem Rotor Ham-2/CDE. Weiter unten auf dem Mast Hirschmann K39-45 und eine Prüfantenne.

Auf dem Hausdach befinden sich:

9-Element Breitband (Logperiodical)
40-90 MHz Antenne
3-Element Kanal E-4 Antenne
3-Element Kanal E-3 Antennen vertikal
alles auf dem Stolle 2010 Rotor mit Stützträger.

Im Empfangs-"Studio" stehen mir folgende Geräte zur Verfügung:


Mehrnormen-TV-Gerät Philips 23TX371A
Farbfernsehgerät von Philips
Aufwärtskonverter Band-1 bis 3 auf UHF
HIFI-Empfänger REVOX A76, A77, A78
Videogerät Philips N1502
und ein 70cm Konverter mit Ausgang auf Kanal E-3/4

Mit diesen Geräten und Antennen konnte ich schon einiges empfangen, darunter viele Erstempfange. Über die TAV auch schon berichtet hat: Kanada auf Kanal A-2, Zimbabue auf E-2, YENED (Griechenland) auf E-3, Australien auf Kanal 0, TSS-Frunze (Taschkent), Marokko auf E-4, Algerien auf E-5, RTVE auf Band-III-Kanälen (tropo), über Meteor-Scatter u.a. YLE auf E-9. Dann Libanon auf E-2 und E-4, Nigeria auf E-3, Ghana auf E-2, Jordanien auf E-3. Und dann natürlich vor kurzem Brasilien auf A-2!

Auch Amateur-TV beobachte ich. Mein weitester Empfang war am 28.11.79 die Station F1RJD aus Frankreich; Entfernung etwa 1000km, die Sendeleistung war lediglich 100W.

Insgesamt habe ich bis heute etwa 1100 Fernsehsender aus 45 Ländern und 4 Kontinenten sowie über 200 ATV-Stationen aus 4 Ländern empfangen. Und ich schaue weiter fern, vielleicht schaffe ich es, noch den 5. Kontinent zu empfangen...

Die Anlage ist von: Rijn Muntjewerff * Hobrederweg 25 * NL-1462 LJ Beemster

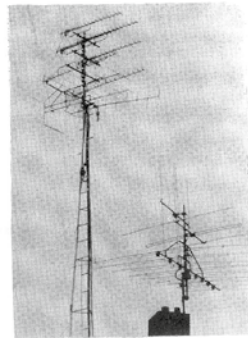

Rijn Muntjewerffs Empfangsanlage, oben die Antennen (rechts auf dem Mast, links auf eigenem Mast) und unten die Empfangsgeräte und Antennenschalter/Filter.



TELE-audiovision 10 1982

55

Satelliten - Fernsehen

Redakteur: Rainer Bärmann
c/o TELE-audiovision
Postfach 801965
D-8000 München 80


(Fortsetzung aus TAV-8/9)

Die unterschiedliche Polarisation der Übertragungsstrecke vom Satellit zur Empfangsstation hat entscheidende Bedeutung für den Empfang mehrerer TV-Satelliten.

In Fachzeitschriften wird der eine Satellit mit rechtsdrehend polarisierender Senderichtung vorgestellt, ein anderer Satellit mit linksdrehender Polarisationsrichtung.

Bei umgekehrter Polarisation werden gewöhnlich Feldstärkeverluste von bis zu 20 dB gegenüber der richtigen Polarisation gemessen und die Feldstärke des störenden Satelliten wird vom Nutzsatelliten verdrängt.

Daraus eröffnet sich für uns TV-DXer ein Problem: wir können Satelliten mit der falschen Polarisation kaum empfangen, ohne den Erreger zu wechseln, obwohl wir in der Strahlrichtung liegen. Für diese Möglichkeit wird an einer Parabolspiegelantenne mit umschaltbarer Polarisationsrichtung gearbeitet, die wechselseitigen Betrieb zuläßt.



Linksdrehend polarisierte Schwingung, verdeutlicht mit zwei Kreuzyagi-Antennen.

Sich auf eine Drehrichtung zu einigen, hätte wenig Sinn, denn viele Frequenzen werden mehrfach ausgenutzt, da der anders polarisierte Nachbarkanal mit schwächerer Feldstärke auf dem Nachbarkanal einfällt. Somit können Satelliten in mittlereuropäischer Orbitalposition 19 West auf sich überlappenden Kanälen betrieben werden.

Die Umsetzung der TV- und Rundfunksignale zwischen 11,7 und 12,5 GHz übernimmt unmittelbar hinter der Parabolantenne ein Konverter mit sehr geringem Eigenrauschen. Am Ausgang des Konverters liegt ein 800MHz breites Frequenzband an, in dem bis zu 40 TV-Programme Platz haben. Diese Zwischenfrequenz von 950 bis 1750 MHz läßt sich noch mit wenig Verlusten

von der Außen- zur Innenbaugruppe transportieren. Die Innenbaugruppe, die möglichst nahe an bisherigen Verstärkern auf dem Dachboden montiert ist, verarbeitet die eingehenden TV-Signale zu Bild+Ton und die digital eintreffenden Rundfunksignale in hörbare Töne, die von üblichen Geräten wiedergegeben werden können.

Die Übertragung der TV-Kanäle geschieht in Frequenzmodulation; die Remodulation erfolgt in der PAL-Norm B/G auf UHF und VHF, gleichzeitig ist es möglich, das Video-Signal mit Ton 1 und Ton 2 direkt über die AV-Buchse in den TV-Apparat einzuspeisen.

Grundsätzlich ist in Einzel- und Gemeinschaftsempfangsstellen zu unterscheiden. Bei einer Einzelsempfangsstelle wird vom Teilnehmer der Mischoszillator mittels einer Fernsteuerung umgeschaltet, es werden somit etliche Frequenzumsetzer eingespart.

Die Gemeinschaftsantenne muß jedoch alle angebotenen Sat-TV-Programme gleichzeitig liefern und benötigt dazu für jeden Kanal den entsprechenden Umsetzer. Der Preis schlüsselfertiger Sat-TV-Anlagen wird auch nach seriemäßiger Fertigung wohl kaum auf unter DM 2000,- zu veranschlagen sein.

Sat-TV aktuell:

Das künftige französische 4-TV-Programm wird vom Direktempfangssatelliten TDF1 geparkt werden, der in der Orbitposition 19° geparkt ist. Dies bisherigen etwa 60 UHF-Sender von TF1 werden das Programm dann in SECAM abstrahlen.

Im Juli wurde der Hauptvertrag zur Fertigung der beiden Direktempfangssatelliten TDF1 und TV-Sat-1 unterzeichnet. Die Bereitstellung wurde auf Frühjahr 1985 vereinbart.

Satelliten-Programm

Vorschau vom 6. bis 12. September.
Das englische Satelliten-Programm kann in einigen Gebieten des Rediffusion-Netzes empfangen werden.

Montag, 6. September

20.00 Skyways (12)
Spanische Geschichten auf einem Flughafen
20.45 Big League Soccer (2)
Serie über die englische Fußball-Elite
21.45 The man maker
Mit Marcel Marceau

Schweiz: Überraschenderweise wurde die Konzession zum Bau des schweizerischen TelSat vom Schweizer Bundesrat verweigert. Der TV-Satellit wird somit kaum vor dem Frühjahr 1988 in Probetrieb gehen. Davon unberührt wird das russische (von Gorizont) TV-Programm in Kabelnetze der Rediffusion eingespeist und erscheint in schweizer Fernsehzeitschriften mit fester Programmankündigung.

TELE-audiovision 10 1982

7

Der riesige
nimmt jedoch
leistung einer

kung ist aber
appe für diese
zw. festgelegt
den die Cam-
ihrem Urlaub
nicht verzich-
er von Wo-
mit dieser
EZ-sicher die
den. Nicht zu

Den passenden 12 V-
mitsamt Zweifachver-
Zigarettenanzünder
sich bei Bedarf.

Da bei dieser Be-
Scart-Buchse belegt
Fernseher nur über den
lator betrieben werden

● **Aufbau**
Die in einem handlich-
paket angelegte Mit-
ne, blickt sich sehr leicht
belegt auf für die
schreibung aufbauen.
Sat-Finder erleichtert

- AUTOMATIC VIDEO CONTRAST (AVC)
- BUILT-IN GRAPHICS
- ALL FEATURES ON ONE REMOTE CONTROL
- VHS-C COMPATIBLE FOR ASTRA DA-18 VIDEO RECORDERS
- PHASE LOCK LOOP FREQUENCY SYNTHESIS PLL
- FULLY TUNABLE WITH 2.1 EXPANDER
- TWO CHANNELS WITH DOLBY B SYSTEM
- FULLY TUNABLE AUDIO ALONG WITH PLL
- MULTISTANDARD, ADJUSTABLE AUDIO AND VIDEO TIL MIT EXTERNAL FIELD SYNCHRONIZER
- ANTI-FLASH FILTER FOR COLOR WITH DOUBLE MAGNETIC SHIELD
- MULTI SATELLITE RECEPTION (IN PROGRESS DEVELOPMENT)

BESTLINK

- AUTOMATIC VIDEO CONTRAST (AVC)
- ON-SCREEN GRAPHICS
- FULL REMOTE CONTROL
- PRE-TUNED FOR ASTRA DA-18 AND KOPERNIKUS
- PHASE LOCK LOOP FREQUENCY SYNTHESIS PLL
- Hi-Fi STEREO WITH 2.1 EXPANDER
- D.N.R. NOISE REDUCTION
- ADJUSTABLE AUDIO OUTPUT LEVEL
- FULLY TUNABLE AUDIO AND VIDEO WITH ACCURATE ON-SCREEN DISPLAY
- TWO DECODER LOOP THROUGH FACILITY
- MULTI-SATELLITE RECEPTION (IN PROGRAMMABLE)

A small television set with a black frame. The screen displays white text on a dark background. The text includes: "CHANNEL: 10", "MODE: AUTO", "TUNING: 100% & HOLD", "VOLUME: 100%", "BRIGHTNESS: 100%", "CONTRAST: 100%", "COLOR: 100%", "HOLD: 100%", "RECALL: 100%", "MEMORY: 100%", "AUTO: 100%", "MANUAL: 100%", "STOP: 100%", "PAUSE: 100%", "PLAY: 100%", "F.W.F. STEREO WITH 2.1 EXPANDER". Below the screen, there are some controls and a small label.

A black remote control with numerous buttons. It has a numeric keypad at the top, followed by various function keys like "POWER", "VOL-", "VOL+", "CH-", "CH+", "MENU", etc. There are also some indicator lights at the bottom.

A large, black electronic device, likely a video receiver or amplifier. It has a sleek, rectangular design with a horizontal slot in the center. Above the slot, the word "BESTLINK" is printed. Below the slot, there are several buttons and indicators. The device is shown from a slightly elevated angle, highlighting its front panel.

BEST

BEST SYSTEMS CORPORATION

5F., NO. 5, LANE 538, CHUNG CHENG ROAD, HSIN TIEN, TAIPEI, TAIWAN, R.O.C.
INT. TEL: 886-2-2186286, INT. FAX: 886-2-2181508

VERKAUFSBÜRO EUROPA: TEL: +44-255-420438 FAX: +44-255-222162

FILE-DATE 9/92

Nach Dort

...und all
die Satelliten
dazwischen



MONTEREY

Multi-Satellitenreceiver von Chaparral

Es gibt mehr zu sehen mit Monterey
Wohin führt Ihr Regenbogen Sie? Kaufen Sie Ihr allererstes Satellitensystem, oder möchten Sie Ihre vorhandene Anlage erweitern? Denken Sie daran, mit

- Volle Gerätesteuerung mit einer durchdachten und daher bequemen IR-Fernbedienung;
- 99 Speicherplätze für Ihre Lieblingsprogramme in einem übersichtlichen Menü;
- Wegner Panda f Stereo Sound für Raumklang wie im Theater mitten in Ihrem Wohnzimmer;
- Automatischer Timer, damit Sie auf kein Satelliten-TV-Ereignis mehr verzichten müssen;
- Kompatibel für diverse Decoder, wählt automatisch den richtigen Decoder aus, damit Sie die attraktiven verschlüsselten Programme auslesen können.


Monterey macht es Ihnen leicht.
Monterey Receiver sind kinderleicht zu bedienen. Sie wählen ganz einfach den Namen des gewünschten Kanals aus dem anwenderfreundlichen Bildschirmmenü aus und alles andere macht der Receiver von selbst. Er positioniert die Antenne und stellt den Kanal automatisch ein. Sogar den Decoder aktiviert, falls nötig. Sie genießen die größtmögliche Auswahl an Satellitenprogrammen mit geringstem Aufwand.



10 Jahre Erfahrung & 1,000,000 Verkaufte Actuators



Einfache anschluß an allen gängigen satelliten anlagen
 Lenson Heath
 Channel Master
 IRTE
 Precision
 Concentric
 Maspro
 ...-ENTRAS
 Und viele weitere



Erhältlich Von Unserem Niederländischen Warenlager

JAEGER INDUSTRIAL CO., LTD.

2F., No. 4, Lane 7, Pao Kao Rd., Hsin Tien City, Taipei (231) Taiwan, R.O.C.
Tel: 886-2-9133422, 886-2-9174441 Fax: 886-2-9178362 Tlex: 35553 JICPBI

Die wirtschaftliche Gesamtlösung von STOG für perfekten Satelliten-Empfang



References and Bibliography



Problemloser Satelliten-Direkt-empfang mit System: Die kleine 60 cm-Antenne, magnetische Polarizer, oder Polarisationsweichen, Konverter sowie die kompakte SAT-Kanalauflösungseinheit SKS 3000 (mit drei Kanälen und allen Extras). Das System STOG gewährleistet hohe Integration und Flexibilität der einzelnen Komponenten. Perfekte Technik und höchste Qualität zu fairen Preisen!



SKS 3000 SAT-Kanalauflösungssystem

STOG GmbH, Menzinger Str. 97, 8000 München 50,
Telefon 0 89 / 8 11 10 10, Telefax 0 89 / 8 11 32 94
Niederlassung Wittenberg, Zimmermann Str. 12 A,
O-1600 Wittenberg, Telefon 5 13 03, Telefax 5 13 03
Unigum Kurve U 73, H-3535 Mischke, Telefon 00 36
- 46 / 7 10 84, Telefax 00 36 - 46 / 7 10 84

DER NAME IST

Nikko
ERLEBEN SIE DEN
UNTERSCHIED

... Ihr Kunde wird es auch begrüßen


Nikko. Hervorragende Satelliten Systeme mit ausgezeichnetem Kundendienst, wie Sie es erwarten. Die neueste europäische Technik, höchste Qualität und perfekte Auflösung, sind schon jetzt erprobt für die Zukunft.

- ♦ Nikko NK-2000 Hi Fi Empfänger ♦ mit dazu passendem Verstärker Nikko NK-2001 Autofokus Antennen Einsteller
♦ **Jetzt auch erhältlich:** Nikko NK-1000 Astra Empfänger ♦ NK-2002 Memory Programmierer, programmiert bis zu
99 Programme in 50 Sekunden ♦ **Auch bald erhältlich:** Nikko Mac-2000 D/D2 Mac Decoder ♦ NK-3000 Pal/D2
Mac Empfänger

Nikko der Unterschied ist glasklar. Für weitere Informationen rufen Sie noch heute Ihren Händler an.

NHLE www.nhle.com

[illegible]

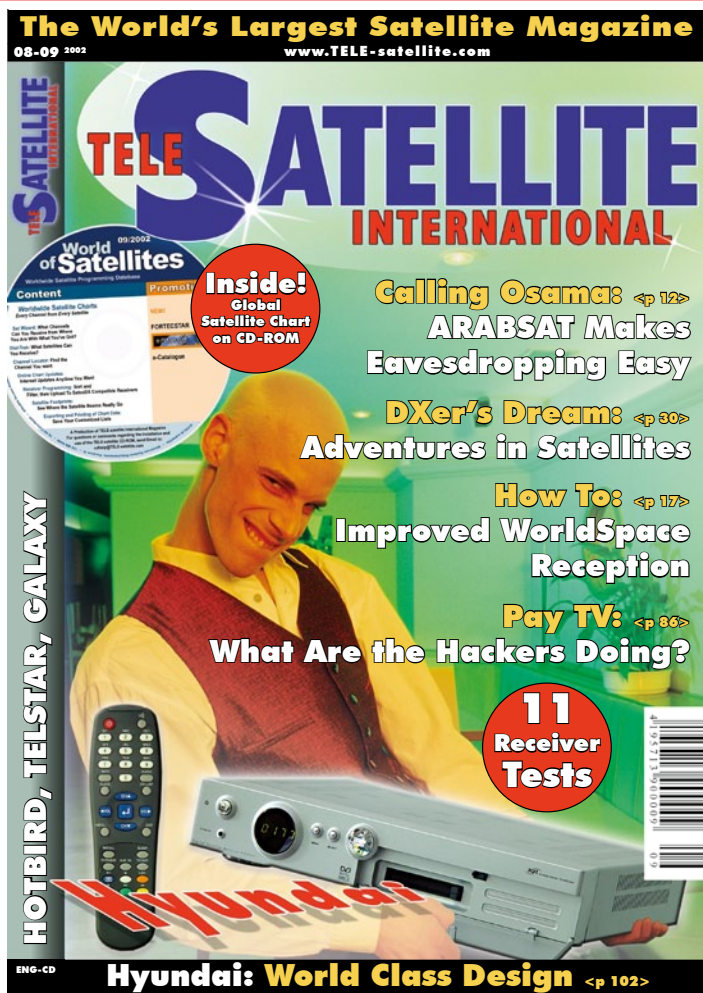

10 Years Ago

TELE-satellite's Editorial 10 Years Ago

Dear Readers!

Does PayTV have a future? If you take a look around you might not think so. One PayTV provider after another seems to be either going out of business or merging with another provider.

I'm actually surprised that so many of these companies have lasted as long as they have. I could never understand why someone should have to pay to watch TV or, for that matter, to listen to the radio, like I enjoy doing. I wouldn't pay to listen to birds sing and a waterfall in the mountains would run its course whether or not I was there to hear it, and I wouldn't pay for that either.

My point is this: TV and radio have naturally evolved to where it is a normal part of our lives. I should not have to pay for this, at least not directly. Indirectly is a different story. I have to buy the satellite equipment consisting of a receiver and a dish.

And I would no doubt also be influenced into buying products that I happened to see in TV ads.

When I think about it a little more, I have determined that I would only pay for something that I can physically hold in my hands. I have no trouble paying for a book or for a magazine like this issue of

TELE-satellite. I would even spend money on a DVD or a CD-ROM if these things weren't so expensive.

But for TV? Or to access information in the Internet? No way! This has to be financed in some other way. How? I don't care, that's not my problem.

That there are more than enough freely available TV and radio programs out there proves that it is possible. Of the more than 10,000 programs that SatcoDX has in its lists, 6,000 of them are freely receivable (2000 of these are radio programs). As far as I am concerned, the remaining 4000 channels that want my money can simply disappear, I don't need them. They don't see any of my money anyway.

I suspect that long-running free TV channels will ultimately prevail, even in regions like North America where PayTV is still successful. In a few years one satellite will start transmitting (like ASTRA and HOTBIRD did a few years ago in Europe) freely available programs. Not long after that, those people that are still paying to watch TV will start asking themselves why they are still doing that.

Of course PayTV still has a reason to exist. Many programs (such as sporting events or first run movies) are only carried via PayTV.

How much is your digital cable system really costing you?



Choosing the right conditional access system can mean the difference between profits and losses. Some companies may save you money up front but hidden costs can stand in the way of success.

The NDS end-to-end open digital cable solution delivers extra revenues and opportunities right from the start:

- > Robust security to protect content and revenues
- > Interactive applications on low cost set-top boxes
- > Interactive content and PVR solutions to reduce churn and grow revenues
- > Open choice of partners

NDS has helped customers around the world go digital successfully. Make the right choice. NDS.

 Don't spend more than you bargained for. Ask for our free Guide to Digital Cable at: www.nds.com/cableguide/
UK Head Office: +44 20 8476 8000



World Leader • World Vision



NOKIA: Terrestrial PayTV and FTA

The slowly increasing availability of DVB-T receivers can be divided into two categories. There are those units that are designed for use just in Europe without the ability to select the transmission mode (2K/8K) or the Guard Interval (1/4 - 1/32). These receivers could not be used in Australia for example. A DVB-T receiver that could be used nearly anywhere in the world is the 9828 T from Nokia. We say "nearly" because this receiver can't handle NTSC signals.

The 9828 T really doesn't look any different on the outside compared to its satellite receiver brothers from Nokia. The typical front panel includes a display

that either shows the current channel or the current programming mode. The buttons for channel selection are found behind a flap. This is where you will also find the slots for use with various CA modules. Yes, even with DVB-T there will eventually be PayTV and Nokia decided to plan ahead by including this feature in their receiver.

On the rear panel the antenna signal is transported via a UHF modulator. Two Scart connectors deliver video and audio to a TV and a VCR. Audio outputs for a stereo system are also provided via a pair of RCA jacks. A third RCA jack provides a digital audio output.



ECHOSTAR: Small but Beautiful

Two things have been successfully introduced into ECHOSTAR's receivers: the unique ECHONAV navigation system and the informative multilingual user manuals. This holds true for every receiver in ECHOSTAR's new product line, including the extremely compact DSB-707 FTA.

It's amazing how it was possible to fit everything into a 25.5 x 20.0 cm (10.0 x 7.9 inch) cabinet. And this at a height of only 4.0 cm (1.6 inches). On the front panel of this tiny receiver is a set of three small buttons that allow control directly on the receiver but not actual receiver programming. Because of its small size, there was no room for

a display. There is however an LED that indicates the receiver's status. It gets a little tight on the rear panel since ECHOSTAR wanted to include a looped-through IF input, two Scart connectors, a serial interface and four RCA jacks for video, analog stereo audio and digital audio (!) outputs. And with the little space that was left, ECHOSTAR also managed to fit a modulator.

The inside of the box is also just as feature-rich. It can handle 4000 channels (1300 transponders) and 100 satellites. This suggests that this receiver should be used with a motorized system. In addition to DiSEqC 1.0, it comes with DiSEqC 1.2 just for this purpose.

My love! My Digital!

SAMSUNG DIGITAL
WORLDWIDE'S INVESTED

DSR 9400 Series

- FTA: Free To Air
- VIA: Embedded Viaccess
- Nagra: Embedded Nagravision

DSR 9500 Series

- FTA: Free To Air
- CI: Dual Common Interface Slot
- EMVIA: Embedded Viaccess
- VIA CI: Dual Common Interface Slot and Dual Viaccess Slot

DSR 9600 W

- PVR/VIA CI
- PVR(Personal Video Recorder)
- 40GB HDD(Hard Disk Drive) Built in VIA CI
- Embedded Viaccess Slot and Common Interface Slot

mediacast2002
where everything is leading
Stand No. G 30

www.samsungSTB.com

SAMSUNG

Manhattan
TECHNOLOGY WITH VISION

SKYLINE

1000 (FTA) 3000 (CI)

The new range of Manhattan Skyline receivers auto search **USALS** up to 20 satellites and automatically store all the TV and Radio channels: **in less than 60 minutes**

NOW AVAILABLE - OUR MOST FEATURE PACKED RECEIVERS EVER:

TELETEXT - SUBTITLES - 13 LANGUAGES - 5000 CHANNELS (CI) 3000 CHANNELS (FTA)
- RF MODULATOR (CH 21-69) - DIGITAL AUDIO OUTPUT - 2 SCART (CVBS/RGB) - DATA TRANSFER BETWEEN RECEIVERS - REAL TIME DISPLAY - LAST CHANNEL RECALL - CHANNEL & MENU LOCK - 100/240V AC 50/60 Hz SMPS - PICTURE IN MENU - USER FRIENDLY MENUS - 4 RCA OUTPUTS - MULTIPLE BROADCAST LANGUAGE SUPPORT - 22 FAVOURITE GROUPS - BUILT-IN EDITING OF CHANNEL, TP and SATELLITE (Add, Delete, Name, Move, Sort) - CHANNEL LIST PER SATELLITE - PLUS MANY, MANY MORE FEATURES.....

2 YEAR WARRANTY

EUROSAT

Head Office: 5 Osgate Centre, Osgate Lane, LONDON, NW2 7JA, UK
T: +44 (0) 20 8452 6699 F: +44 (0) 20 8452 8788 E: sales@eurosat.co.uk
W: <http://www.manhattan-receivers.com> <http://www.eurosat.co.uk>

* using Orbilogic 1.2 Motor

Superguide!

TVN
HOTBIRD (13.0) - 11148, H, 6.60 & 7.02 & 7.20; 11178, H, 21100, 3/4; 12211, H, 5632, 3/4; 12573, H, 5632, 3/4
Language: Polish

CET: UTC+2h

Weekdays


05:35	Kropka nad I	Polish
05:50	Tajemnice Pokalunku	Polish
06:35	Telesklep	Polish
07:05	Brzydula	Polish
07:50	Childrens Programmes	Polish
09:30	Tele Gra	Polish
10:30	Telesklep	Polish
11:50	Rozmowy w toku	Polish
13:25	Childrens Programmes	Polish
14:15	Beverly Hills 90210	Polish
15:15	Millionerzy	Polish



16:00	TVN Fakty	Polish
16:15	Brzydula	Polish
17:10	Tajemnice Pokalunku	Polish
18:00	Rozmowy w toku	Polish
19:00	TVN Fakty	Polish
19:30	Kropka nad I	Polish
19:45	Pogoda	Polish
20:00	Entertainment	Polish
22:30	TVN Fakty	Polish
23:20	News & Entertainment	Polish

Weekends

6:00	Telesklep	Polish
7:00	Brzydula	Polish
7:15	Childrens programmes	Polish
11:00	Droga do gwiazd	Polish
12:55	Magazine Programme	Polish
13:40	Animated series	Polish
14:45	Beverly Hills 90210	Polish
16:15	Nauka Jazdy	Polish
17:10	Series	Polish
19:00	Sun: Nauka jazdy	Polish
19:30	TVN Fakty	Polish
20:00	Superkino	Polish
22:15	Movie	Polish
0:00	Comedy	Polish

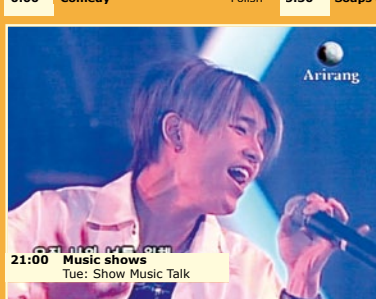

21:00 Music shows
Tue: Show Music Talk

DD INDIA
PAS 10 68.5E 4034V 19565 3/4
PAS 9 58W 14777H 26463 3/4
Language: Hindi, English and other Indian languages

UTC+5.5h: Delhi time zone

Daily schedule

06:00	Music programme	Hindi
06:30	Fitness programme	Hindi
08:00	Current affairs	Hindi
08:30	Wed: Update on Kashmir	Multi
09:00	News and current affairs	Hindi
09:30	Series and music programmes	Multi
10:00	Music, cinema and series features	Multi
10:30	With News Headlines	Multi
11:00	Bollywood and music programmes	Hindi
11:30	Series and music programmes	Multi
12:00	Talak Kyon	Hindi
12:30	Sat: Children's programme	Hindi
13:00	Sanjog	Hindi
13:30	Daily soaps	Hindi
14:00	Sun: Ek Zara Si Baat	Hindi
14:15	Samachar	Hindi
14:30	News	English
14:45	Matinee Mazza	Hindi
15:00	Sat: Fashion	Urdu
15:15	News	Hindi
15:30	Film	Hindi
15:45	Children's programmes	Hindi
16:00	Thi: Khidkayan	Hindi
18:30	Soaps	Hindi
19:30	Sun: Children's programme	Hindi
20:00	Soaps and serials	Hindi
20:30	Wed: Mere Humsafar	English
21:00	News	Hindi
21:30	Antaraal	Hindi
22:00	Sat: Aap Beeti	Hindi
22:30	Maryada	Hindi
23:00	Sat: Film	Hindi
23:30	Hello Inspector	Hindi
0:00	Dahleez	Hindi
0:30	Series and film features	Hindi
1:00	News and series	Hindi
1:30	Mon: Mindscapes	Hindi



0:30	Film	Hindi
1:00	Sat/Sun: Music and serials	Hindi
1:30	Antaraal	Hindi
2:00	Daily soap	Hindi
2:30	Soaps	Hindi
3:00	Kuntal	Hindi
3:30	Sat: Dawat cookery show	Hindi
4:00	Music features	Hindi
4:30	Series and cinema features	Hindi
5:00	Sat: Ujari	Hindi
5:30	Soaps and documentary	Hindi

BVN
HOTBIRD (13.0) - 12303, V, 27500, 3/4; ASTRA (19.2) - 12574, H, 22000, 5/6; NSSK 803 (338.5) - 11892, H, 3400, 3/4; 11892, V, 3400, 3/4
Language: Dutch

CET: UTC+2h

Weekdays

18:00	NOS Journaal	Dutch
18:15	Daily news programme	Dutch
18:30	Tik Tak	Dutch
18:40	BVN-TV Voor Kinderen	Dutch
18:50	Children's programme	Dutch
19:00	The Clockhouse	Dutch
19:10	Information programmes	Dutch
19:20	Studio NL	Dutch
19:30	News magazine	Dutch
19:40	NOS Journaal	Dutch
19:50	News magazine	Dutch
20:00	Weerbericht	Dutch
20:10	Weather forecast	Dutch
20:20	Entertainment	Dutch
20:30	NOS Sportjournaal	Dutch
20:40	Sports news	Dutch
20:50	Nova	Dutch
21:00	Current affairs	Dutch
21:10	Music and chat prg.	Dutch

Saturday

18:00	NOS Journaal	Dutch
18:15	Daily news programme	Dutch
18:30	Hopa	Dutch
18:40	Young children's show	Dutch
18:50	BVN-TV Voor Kinderen	Dutch
19:00	Children's programmes	Dutch
19:10	Thi: Khidkayan	Hindi
19:20	News	Hindi
19:30	Soaps	Hindi
19:40	Sun: Children's programme	Hindi
19:50	Soaps and serials	Hindi
20:00	Wed: Mere Humsafar	English
20:10	News	Hindi
20:20	Antaraal	Hindi
20:30	Sat: Aap Beeti	Hindi
20:40	Maryada	Hindi
20:50	Sat: Film	Hindi
21:00	Hello Inspector	Hindi
21:10	Dahleez	Hindi
21:20	Series and film features	Hindi
21:30	News and series	Hindi
21:40	Mon: Mindscapes	Hindi

Sunday

14:30	De Zevende Dag	Dutch
15:00	Politics, media and culture	Dutch
15:15	Buitenhof	Dutch
15:30	Talk show	Dutch
15:45	Pause	Dutch
16:00	Transmission break	Dutch
16:15	De Matinee	Dutch
16:30	Music programme	Dutch
16:45	Hopa	Dutch
16:55	Children's programme	Dutch
17:00	Series	Dutch
17:15	Afri 9	Dutch
17:30	VRT Journaal	Dutch
17:45	New from VRT	Dutch
18:00	Travel programme	Dutch
18:15	Nos Journaal	Dutch
18:30	Weerbericht	Dutch
18:45	Weather forecast	Dutch
19:00	Flikken	Dutch
19:15	Political series	Dutch
19:30	Het Zwart Schaap	Dutch
19:45	Discussion programme	Dutch
20:00	Pauw In Panama	Dutch
20:15	NOS Studio Sport	Dutch
20:30	Sports show	Dutch



16:00 Buitenhof
Talk show

PTA PTA
Thalcom 3 78.5E 3640H 28066 3/4
Eutelsat Sesat 36E 12561V 3254 2/3
Hot Bird 3 13E 12111V 27500 3/4
Language: Armenian, English, Russian

UTC+5h: Yerevan time

Weekdays

09:00	Hailour	Armenian
09:10	News	Armenian
11:00	Love Magic	Armenian
11:15	Series	Armenian
11:45	Science Film	Armenian
12:40	Informative programmes	Armenian
13:00	Thi: Cookery	Armenian
13:20	Hailour	Armenian
13:30	News	Armenian
14:00	Arts & Culture	Armenian
14:15	Music Channel	Armenian
14:30	Music programmes	Armenian
17:00	Hailour	Armenian
17:20	Cartoons	Armenian
17:45	Informative prg.	Armenian
19:00	Evening Yerevan	Armenian
20:00	Main news broadcast	Armenian
20:10	From Everywhere	Armenian
20:20	Documentary	Armenian
20:35	Too - Toonik	Armenian
21:00	Cartoons for children	Armenian
21:10	Hailour	Armenian
21:20	Documentaries	Armenian
21:30	Football Hailour	Armenian
21:40	Football news	Armenian
00:00	Hailour	Armenian
00:20	Film	Armenian
01:20	Includes following prg.	Armenian
01:25	Hailour	Armenian
01:30	News in Russian	Russian
01:35	Hailour	English
01:40	News in English	English

Saturday

09:00	Hailour	Armenian
09:10	News	Armenian
09:30	Fa, Sol, La	Armenian
10:00	Documentary	Armenian
11:00	Love Magic	Armenian
11:15	Series	Armenian
11:45	Arts and History	Armenian
12:40	TV Library	Armenian
14:00	Aravil	Armenian
14:30	Religion for Life	Armenian
15:00	Heath World	Armenian
15:20	Theatre	Armenian
17:00	Religious Cartoon	Armenian
17:20	Illustrated Bible Stories	Armenian
17:45	Agro-TV	Armenian
18:10	Farming informaion	Armenian
18:30	Bon Appetite	Armenian
18:45	Cookery	Armenian
19:00	Evening Yerevan	Armenian
19:10	News	Armenian
19:30	Cartoons	Armenian
20:00	Hailour	Armenian
20:10	Documentary	Armenian
20:20	Entertainment	Armenian
20:30	Football Hailour	Armenian
20:40	Hailour	Armenian

Sunday

9:00	Hailour	Armenian
9:10	News	Armenian
9:30	Documentary	Armenian
10:05	Barev!	Armenian
10:30	Morning magazine	Armenian
11:05	Cartoons	Armenian
11:30	Circus program	Armenian
11:40	Chess-64	Armenian
12:00	Zinoj	Armenian
12:30	Science Film	Armenian
14:00	Film	Armenian
15:20	Live Together	Armenian
16:45	Religious programmes	Armenian
18:00	Cartoons	Armenian
18:10	Bon Appetite	Armenian
19:00	Cookery	Armenian
19:10	House of Laug	Armenian
20:00	Comedy	Armenian
20:10	Documentaries	Armenian
22:00	Agenda	Armenian
22:10	Current affairs	Armenian

AL-MANAR CH.
ARABSAT 2A,3A (26.0) - 11785, V, 27500, 3/4;
TELSTAR5 (263.0) - 12152, H, 20000, 3/4; NSS806 (319.5) - 3803, R, 25357, 3/4; NSSK, 803 (338.5) - 4055, R, 27500, 3/4
Language: Arabic

UTC + 3h: Beirut time

Daily Schedule

03:30	Anbaa & Araa	Arabic
04:30	Discussion programmes	Arabic
05:00	Politics and culture	Arabic
06:00	Documentaries	Arabic
06:30	Quraan Al-Karim	Arabic
07:00	Religious programming	Arabic
07:30	Adiya wa mounajat	Arabic
08:00	Morning News	Arabic
08:30	Live Lebanon and the world	Arabic
09:00	News magazine	Arabic
09:30	News Brief	Arabic
09:45	Live Lebanon and the world	Arabic
11:30	News Brief	Arabic
11:45	Oars el sakar	Arabic
12:30	News features	Arabic
13:30	News Brief	Arabic
13:45	Discussion programmes	Arabic
14:30	Sun: Viewer's phone-in	Arabic
15:00	English News	English
15:30	Tue: My Municipality (Arabic)	Arabic
16:00	News & Documentaries	Arabic
16:30	Noon News	Arabic
16:45	Pictures & Events	Arabic
17:00	Images of news events	Arabic
17:30	Al-Manar Assaghir	Arabic
18:00	Children's programmes	Arabic
18:30	News Brief	Arabic
19:00	News features	Arabic
19:30	Sat: Sport Talent	Arabic
20:00	Drama	Arabic
20:30	Evening News	Arabic
21:00	Documentaries & Education	Arabic
21:30	Includes British "Open University" programmes	Arabic
22:30	News and features	Arabic
23:00	Wed: What else?	Arabic
23:30	Anbaa & Araa	Arabic
00:30	Pictures & Events	Arabic

ARIRANG
HOTBIRD (13.0) - 12220, H, 5632, 3/4; AMSAT 8 (166.0) - 3815, H, 5632, 3/4; AMSAT 9 (302.0) - 3880, H, 5632, 3/4
Language: Korean or English

UTC + 9h: Seoul

Weekdays

08:50	Let's Speak Korean	Korean
09:10	Korean News U	Korean
09:30	Cartoon Time	Korean
10:00	Kidsland WoWo	Korean
10:30	Documentary	Korean
11:00	Tue: Company Cl	Korean
11:30	Shooting for th	Korean
12:00	Arirang News	Korean
12:20	Heart to Heart	Korean
12:50	English talk show	Korean
13:00	Documentaries	Korean
13:10	Entertainment	Korean
13:20	Fri: Performing A	Korean
13:30	Arirang News	Korean
13:40	News and weath	Korean
13:50	Entertainment	Korean
14:00	Thu: Quiz Champ	Korean
14:10	Marriage Game	Korean
14:20	Daily soap	Korean
14:30	Geo Korea	Korean
14:40	Korean natural hi	Korean
14:50	Biz Today	Korean
15:00	Daily business ne	Korean
15:10	Documentaries	Korean
15:20	Entertainment	Korean
15:30	Mon: Pop music	Korean
15:40	Korean News U	Korean
15:50	Cartoon Time	Korean
16:00	Arirang News	Korean
16:10	News for chil	Korean
16:20	Let's Speak Kor	Korean
16:30	Language course	Korean
16:40	Heart to Heart	Korean
16:50	Talk show	Korean
17:00	Marriage Game	Korean
17:10	Daily soap	Korean
17:20	Music shows	Korean
17:30	Tue: Show Music	Korean
17:40	Modern Eastern	Korean
17:50	Arirang News	Korean
18:00	Geo Korea	Korean
18:10	Documentary	Korean
18:20	Thu: Now in Kore	Korean
18:30	Shooting for th	Korean
18:40	Fri: The	Korean
18:50	Contenders (quiz	Korean
19:00	Korean News U	Korean
19:10	Documentaries	Korean
19:20	Entertainment	Korean
19:30	Fri: Amazing Cou	Korean
19:40	Music shows	Korean
19:50	Mon: Pops in Sec	Korean



- EUTELSAT 5A - Europe ◀ 359.5 East (000.5 West)
EUTELSAT 7A - Europe, Africa ◀ 359.3 East (000.7 West)
EUTELSAT 8A - Europe, Middle East ◀ 359.2 East (000.8 West)
INTELSAT 10-02 - Europe, Middle East, North India ◀ 359.2 East (000.8 West)
C-Band: INTELSAT 10-02 - Europe, Africa, South East Asia ◀ 359.2 East (000.8 West)
THOR 5, 6 - Europe ◀ 359.2 East (000.8 West)
AMOS 2, 3 - Europe, Middle East ◀ 356.0 East (004.0 West)
NILESAT 101, 102, 201, ATLANTIC BIRD 4A - Middle East ◀ 353.0 East (007.0 West)
ATLANTIC BIRD 2 - Europe, America, Middle East ◀ 352.0 East (008.0 West)
EXPRESS AM44 - Middle East ◀ 349.0 East (011.0 West)
C-Band: EXPRESS AM44 - Europe, North Africa, Middle East ◀ 349.0 East (011.0 West)
EUTELSAT 12A - Europe, Africa ◀ 347.5 East (012.5 West)
TELSTAR 12 - Europe, South Africa, Am. ◀ 345.0 East (015.0 West)
INTELSAT 901 - Europe, Middle East ◀ 342.0 East (018.0 West)
C-Band: INTELSAT 901 - Europe, Africa, Atlantic Ocean Region ◀ 342.0 East (018.0 West)
NSS 5 - Europe, Africa ◀ 340.0 East (020.0 West)
C-Band: NSS 5 - Africa ◀ 340.0 East (020.0 West)
NSS 7 - Europe, Middle East, Africa, America ◀ 338.0 East (022.0 West)
C-Band: NSS 7 - Europe, Africa, America ◀ 338.0 East (022.0 West)
SES 4 - Europe, Middle East ◀ 338.0 East (022.0 West)
C-Band: SES 4 - America ◀ 338.0 East (022.0 West)
INTELSAT 905 - Europe ◀ 335.5 East (024.5 West)
C-Band: INTELSAT 905 - Europe, Africa, America ◀ 335.5 East (024.5 West)
INTELSAT 907 - Europe ◀ 332.5 East (027.5 West)
C-Band: INTELSAT 907 - Europe, Africa, America ◀ 332.5 East (027.5 West)
HISPASAT 1C, 1D, 1E - Europe, America ◀ 330.0 East (030.0 West)
INTELSAT 25 - Africa ◀ 328.5 East (031.5 West)
C-Band: INTELSAT 25 - Europe, Africa ◀ 328.5 East (031.5 West)
INTELSAT 903 - Europe ◀ 325.5 East (034.5 West)
C-Band: INTELSAT 903 - Europe ◀ 325.5 East (034.5 West)
TELSTAR 11N - Europe, Africa ◀ 322.5 East (037.5 West)
C-Band: NSS 10 - Europe, Africa, America ◀ 322.5 East (037.5 West)
NSS 806 - Europe ◀ 319.5 East (040.5 West)
C-Band: NSS 806 - America, Europe ◀ 319.5 East (040.5 West)
INTELSAT 11 - Brazil ◀ 317.0 East (043.0 West)
C-Band: INTELSAT 11 - Brazil ◀ 315.0 East (045.0 West)
INTELSAT 14 - Europe, North Africa, South America ◀ 315.0 East (045.0 West)
C-Band: INTELSAT 14 - America ◀ 315.0 East (045.0 West)
INTELSAT 1R - America ◀ 315.0 East (050.0 West)
INTELSAT 707 - America ◀ 307.0 East (053.0 West)
C-Band: INTELSAT 707 - America, Africa ◀ 307.0 East (053.0 West)
Galaxy 11 - Brazil ◀ 304.5 East (055.5 West)
C-Band: INTELSAT 805 - America ◀ 304.5 East (055.5 West)
INTELSAT 9 - Mexico, Brazil, Europe ◀ 302.0 East (058.0 West)
C-Band: INTELSAT 9 - America ◀ 302.0 East (058.0 West)
C-Band: INTELSAT 16 - America ◀ 302.0 East (058.0 West)
AMAZONAS 1 - Brazil, South America ◀ 299.0 East (061.0 West)
C-Band: AMAZONAS 1 - America ◀ 299.0 East (061.0 West)
AMAZONAS 2 - North America ◀ 299.0 East (061.0 West)
ECHOSTAR 12,15 - Conus ◀ 298.5 East (061.5 West)
TELSTAR 14 - Brazil, Mercosul ◀ 297.0 East (063.0 West)
STARONE C1 - Brazil ◀ 295.0 East (065.0 West)
C-Band: STARONE C1 - South America ◀ 295.0 East (065.0 West)
STARONE C2 - Brazil ◀ 290.0 East (070.0 West)
C-Band: STARONE C2 - South America ◀ 290.0 East (070.0 West)
AMC 6 - North America ◀ 288.0 East (072.0 West)
C-Band: AMC 6 - North America ◀ 288.0 East (072.0 West)
DIRECTV 1R, NIMIQ 5 - Conus ◀ 287.5 East (072.5 West)
C-Band: BRASILSAT B3 - Brazil ◀ 285.0 East (075.0 West)
ECHOSTAR 4, 8, 1 - America, Mexico ◀ 283.0 East (077.0 West)
SIMON BOLIVAR - South America ◀ 282.0 East (078.0 West)
C-Band: SIMON BOLIVAR - South America ◀ 282.0 East (078.0 West)
NIMIQ 4 - Canada ◀ 278.0 East (082.0 West)
AMC 9 - North America ◀ 277.0 East (083.0 West)
C-Band: BRASILSAT B4 - Brazil ◀ 276.0 East (084.0 West)
AMC 16 - North America ◀ 275.0 East (085.0 West)
SES 2 - North America ◀ 273.0 East (087.0 West)
C-Band: SES 2 - North America ◀ 273.0 East (087.0 West)
GALAXY 28 - America ◀ 271.0 East (089.0 West)
C-Band: GALAXY 28 - America ◀ 271.0 East (089.0 West)
NIMIQ 1 - Canada ◀ 269.0 East (091.0 West)
GALAXY 17 - North America ◀ 269.0 East (091.0 West)
C-Band: GALAXY 17 - North America ◀ 269.0 East (091.0 West)
GALAXY 25 - North America ◀ 266.9 East (093.1 West)
GALAXY 3C - North America ◀ 265.0 East (095.0 West)
C-Band: GALAXY 3C - North America ◀ 265.0 East (095.0 West)
GALAXY 19 - North America ◀ 263.0 East (097.0 West)
C-Band: GALAXY 19 - North America ◀ 263.0 East (097.0 West)
GALAXY 16 - North America ◀ 261.0 East (099.0 West)
C-Band: GALAXY 16 - North America ◀ 261.0 East (099.0 West)
DIRECTV 4S, 8 - America ◀ 259.0 East (101.0 West)
SES 1 - North America ◀ 259.0 East (101.0 West)
C-Band: SES 1 - North America ◀ 259.0 East (101.0 West)
AMC 1 - North America ◀ 257.0 East (103.0 West)
C-Band: AMC 1 - North America ◀ 257.0 East (103.0 West)
AMC 15 - North America ◀ 255.0 East (105.0 West)
C-Band: AMC 18 - North America ◀ 255.0 East (105.0 West)
ANIK F1R - North America ◀ 252.7 East (107.3 West)
C-Band: ANIK F1R - North America ◀ 252.7 East (107.3 West)
C-Band: ANIK F1 - South America ◀ 252.7 East (107.3 West)
ECHOSTAR 10, 11 - America ◀ 250.0 East (110.0 West)
DIRECTV 5 - America ◀ 250.0 East (110.0 West)
ANIK F2 - North America ◀ 248.9 East (111.1 West)
C-Band: ANIK F2 - North America ◀ 248.9 East (111.1 West)
SATMEX 6 - America ◀ 247.0 East (113.0 West)
C-Band: SATMEX 6 - America ◀ 247.0 East (113.0 West)
SATMEX 5 - America ◀ 243.2 East (116.8 West)
C-Band: SATMEX 5 - America ◀ 243.2 East (116.8 West)
ANIK F3 - Conus ◀ 241.0 East (119.0 West)
C-Band: ANIK F3 - America ◀ 241.0 East (119.0 West)
ECHOSTAR 14 - Conus ◀ 241.0 East (119.0 West)
DIRECTV 7S - Conus ◀ 241.0 East (119.0 West)
ECHOSTAR 9, GALAXY 23 - North America ◀ 239.0 East (121.0 West)
C-Band: ECHOSTAR 9, GALAXY 23 - North America ◀ 239.0 East (121.0 West)
GALAXY 18 - North America ◀ 237.0 East (123.0 West)
C-Band: GALAXY 18 - North America ◀ 237.0 East (123.0 West)
C-Band: GALAXY 14 - North America ◀ 235.0 East (125.0 West)
AMC 21 - North America ◀ 235.0 East (125.0 West)
GALAXY 13, HORIZONS 1 - North America ◀ 233.0 East (127.0 West)
C-Band: GALAXY 13, HORIZONS 1 - North America ◀ 233.0 East (127.0 West)
CIEL 2 - America ◀ 231.0 East (129.0 West)
C-Band: AMC 11 - North America ◀ 229.0 East (131.0 West)
C-Band: GALAXY 15 - North America ◀ 227.0 East (133.0 West)
C-Band: AMC 10 - North America ◀ 225.0 East (135.0 West)
C-Band: AMC 7 - North America ◀ 223.0 East (137.0 West)
C-Band: AMC 8 - North America ◀ 221.0 East (139.0 West)



- 003.0 East ▶ C-Band: RASCOM QAF 1R - Africa
- 003.0 East ▶ RASCOM QAF 1R - Africa
- 003.0 East ▶ EUTELSAT 3C - Europe
- 003.0 East ▶ C-Band: EUTELSAT 3A - EUROPE
- 004.8 East ▶ ASTRA 4A - Europe
- 007.0 East ▶ EUTELSAT 7A - Europe, Africa
- 009.0 East ▶ EUTELSAT 9A - Europe
- 009.0 East ▶ EUTELSAT KA-SAT 9A - Ireland
- 010.0 East ▶ EUTELSAT 10A - Europe
- 010.0 East ▶ C-Band: EUTELSAT 10A - Global
- 013.0 East ▶ EUTELSAT HOTBIRD 13A,13B,13C - Europe, Middle East
- 016.0 East ▶ EUTELSAT 16A - Europe, Africa
- 017.0 East ▶ Amos 5 - North Africa, Middle East
- 017.0 East ▶ C-Band: Amos 5 - Africa, Middle East
- 019.2 East ▶ ASTRA 1H,1KR,1L,1M,2C - Europe
- 020.0 East ▶ C-Band: ARABSAT 5C - Africa, Middle East
- 021.6 East ▶ EUTELSAT 21A - Europe, Asia, West Africa
- 023.5 East ▶ ASTRA 3B, THOR 2 - Europe
- 025.5 East ▶ EUTELSAT 25A - Europe, Asia
- 026.0 East ▶ BADR 4,5,6 - North Africa, Middle East
- 028.2 East ▶ EUTELSAT 28A, ASTRA 1N,2A,2B - Europe
- 030.5 East ▶ ARABSAT 5A - Middle East
- 030.5 East ▶ C-Band: ARABSAT 5A - Asia, Middle East
- 031.0 East ▶ INTEL SAT 24 - Europe
- 031.5 East ▶ ASTRA 1G - Europe
- 033.0 East ▶ EUTELSAT 33A - Europe
- 033.0 East ▶ INELSAT NEWDAWN - Africa
- 034.5 East ▶ ARABSAT 2B - Middle East
- 036.0 East ▶ EUTELSAT 36A,36B - Europe, South Africa, Asia, Russia
- 038.0 East ▶ PAKSAT 1R - Pakistan, North India
- 039.0 East ▶ C-Band: PAKSAT 1R - Pakistan, India, Middle East, Africa
- 039.0 East ▶ HELLAS SAT 2 - Europe, Middle East, Asia
- 040.0 East ▶ EXPRESS AM1 - Europe, Russia
- 040.0 East ▶ C-Band: EXPRESS AM1 - Europe, Russia
- 042.0 East ▶ TURKSAT 2A,3A - Europe, Russia
- 045.0 East ▶ INTEL SAT 12 - India, South Africa, Middle East, Europe
- 049.0 East ▶ C-Band: YAMAL 202 - Global
- 053.0 East ▶ EXPRESS AM22 - Europe, Middle East, North India
- 055.0 East ▶ GSAT-8 ASTRA 1F - Russia
- 056.0 East ▶ BONUM 1 - East Russia
- 057.0 East ▶ NSS 12 - Europe, Russia, Africa, India
- 057.0 East ▶ C-Band: NSS 12 - Europe, Russia, Africa, India, Global
- 060.0 East ▶ INTEL SAT 904 - Europe
- 060.0 East ▶ C-Band: INTEL SAT 904 - Europe, Africa, Global
- 062.0 East ▶ INTEL SAT 902 - Europe, Middle East
- 062.0 East ▶ C-Band: INTEL SAT 902 - Europe, China, Australia, South Africa, Global
- 064.2 East ▶ INTEL SAT 906 - India, Nepal
- 064.2 East ▶ C-Band: INTEL SAT 906 - Europe, Africa, South India, Global
- 066.0 East ▶ INTEL SAT 17 - Europe, Russia
- 068.5 East ▶ INTEL SAT 7 - South Africa
- 068.5 East ▶ INTEL SAT 10 - Africa, Europe, Middle East
- 068.5 East ▶ C-Band: INTEL SAT 10 - Global
- 070.5 East ▶ EUTELSAT 70A - Europe, Middle East, India
- 074.0 East ▶ INSAT 4CR - India
- 074.0 East ▶ C-Band: INSAT 3C - India
- 075.0 East ▶ ABS-1 - Europe, Asia, Middle East
- 075.0 East ▶ C-Band: ABS-1 - Global
- 076.5 East ▶ APSTAR 2R - North East Asia
- 076.5 East ▶ C-Band: APSTAR 2R - Global
- 078.5 East ▶ THAICOM 5 - Thailand
- 078.5 East ▶ C-Band: THAICOM 5 - India, China, Thailand, Global
- 080.0 East ▶ C-Band: EXPRESS MD1 - Russia, North India
- 083.0 East ▶ INSAT 4A - India
- 083.0 East ▶ C-Band: INSAT 4A - India, Middle East
- 083.0 East ▶ C-Band: INSAT 2E - Asia, Middle East, Europe
- 085.0 East ▶ INTEL SAT 15 - Middle East
- 085.0 East ▶ HORIZONS 2 - Russia
- 087.5 East ▶ C-Band: CHINASAT 5A - China, India, Middle East
- 088.0 East ▶ ST 2 - India, Malaysia
- 088.0 East ▶ C-Band: ST 2 - India, Thailand
- 090.0 East ▶ YAMAL 201 - Russia, North India
- 090.0 East ▶ C-Band: YAMAL 201 - Russia, North India
- 091.5 East ▶ MEASAT 3 - Malaysia, South Asia
- 091.5 East ▶ C-Band: MEASAT 3 - Global, Thailand, Australia, East Asia
- 091.5 East ▶ MEASAT 3A - Malaysia, South Asia
- 091.5 East ▶ C-Band: MEASAT 3A - Global
- 092.2 East ▶ CHINASAT 9 - China
- 093.5 East ▶ INSAT 3A,4B - India
- 093.5 East ▶ C-Band: INSAT 3A,4B - India, Middle East
- 095.0 East ▶ NSS 6 - India, Middle East, South Africa, North East & East Asia, Australia
- 096.5 East ▶ C-Band: EXPRESS AM 33 - Asia, Russia, China
- 100.5 East ▶ ASIASEAT 5 - East Asia, India, Middle East, Thailand
- 100.5 East ▶ C-Band: ASIASEAT 5 - Global
- 103.0 East ▶ C-Band: EXPRESS A2 - Russia, China
- 105.5 East ▶ ASIASEAT 3S - East Asia, South Asia, Australia
- 105.5 East ▶ C-Band: ASIASEAT 3S - Global
- 108.2 East ▶ NSS 11 - South Asia, North East Asia, China
- 108.2 East ▶ C-Band: TELKOM 1 - Indonesia
- 108.2 East ▶ SES 7 - South Asia, Australia
- 110.0 East ▶ BSAT 3A,2C,3C N-SAT 110,JCSAT 110R - Japan
- 110.5 East ▶ C-Band: CHINASAT 10 - China, Asia Pacific
- 113.0 East ▶ KOREASAT 5 - South Korea, North East Asia
- 113.0 East ▶ C-Band: PALAPA D - Asia, Australia
- 115.5 East ▶ C-Band: CHINASAT 6B - Global
- 116.0 East ▶ ABS 7 - South Korea
- 116.0 East ▶ KOREASAT 6 - South Korea
- 122.0 East ▶ ASIASEAT 4 - East Asia, Australia
- 122.0 East ▶ C-Band: ASIASEAT 4 - Global
- 124.0 East ▶ JCSAT 4A - Japan
- 125.0 East ▶ C-Band: CHINASAT 6A - China
- 128.0 East ▶ JCSAT 3A - Japan
- 128.0 East ▶ C-Band: JCSAT 3A - Asia
- 132.0 East ▶ VINASAT 1 - Vietnam
- 132.0 East ▶ C-Band: VINASAT 1 - Asia, Australia
- 132.0 East ▶ JCSAT 5A - Japan
- 134.0 East ▶ APSTAR 6 - China
- 134.0 East ▶ C-Band: APSTAR 6 - Asia, Australia
- 138.0 East ▶ TELSTAR 18 - India, China
- 138.0 East ▶ C-Band: TELSTAR 18 - Asia, Australia
- 140.0 East ▶ EXPRESS AM3 - Russia, China
- 140.0 East ▶ C-Band: EXPRESS AM3 - Russia, China
- 144.0 East ▶ SUPERBIRD C2 - Japan
- 152.0 East ▶ OPTUS D2 - Australia, New Zealand
- 154.0 East ▶ JCSAT 2A - Japan
- 154.0 East ▶ C-Band: JCSAT 2A - Asia&Oceania&Hawaii
- 156.0 East ▶ OPTUS C1,D3 - Australia, New Zealand
- 160.0 East ▶ OPTUS D1 - Australia, New Zealand
- 162.0 East ▶ SUPERBIRD B2 - Japan
- 166.0 East ▶ INTEL SAT 8 - Australia, New Zealand, North East Asia
- 166.0 East ▶ C-Band: INTEL SAT 8 - Pacific
- 169.0 East ▶ C-Band: INTEL SAT 5 - Pacific
- 172.0 East ▶ GE 23 - South Pacific, South East Pacific
- 172.0 East ▶ C-Band: GE 23 - Pacific
- 180.0 East ▶ INTEL SAT 18 - Australia, Pacific
- 180.0 East ▶ C-Band: INTEL SAT 18 - Pacific

ARA
www.TELE-satellite.com

أكبر مجلة تلفزيون رقمي تجارية عالمية منذ 1981

التلفزيون ثلاثي الأبعاد
التلفزيون عالي الجودة
بروتوكول الإنترنت | الويب
ساتلايت

الطبعة العالمية 06-07-08

TSREADER
TS
GOOSAT
SVEC
DVBCN
HEADEND
BLUBOX
SPAUN
AMIKO ALIEN2

معركة الأجهزة الكبيرة

أكبر مجلة تلفزيون رقمي تجارية عالمية

www.TELE-satellite.com

BID
www.TELE-satellite-id.com

Majalah terbesar di dunia tentang perdagangan tv digital

3DTV
HDTV
IP/Web
satellite

INTERNASIONAL 06-07-08

TSREADER
TS
GOOSAT
SVEC
DVBCN
HEADEND
BLUBOX
SPAUN
AMIKO ALIEN2

Perang Big Boxes

Majalah terbesar di dunia tentang perdagangan tv digital

www.TELE-satellite-id.com

BUL
www.TELE-satellite.com

Най-голямото специализирано списание в света за цифрова телевизия

3DTV
HDTV
IP/Web
satellite

ИНТЕРНЕТЪНЪЛ 06-07-08

TSREADER
TS
GOOSAT
SVEC
DVBCN
HEADEND
BLUBOX
SPAUN
AMIKO ALIEN2

Битката за големите приемници

Най-голямото специализирано списание в света за цифрова телевизия

www.TELE-satellite.com

CES
www.TELE-satellite.cz

Největší obchodní magazin o digitální TV na světě

3DTV
HDTV
IP/Web
satellite

MEZINARODNI 06-07-08

TSREADER
TS
GOOSAT
SVEC
DVBCN
HEADEND
BLUBOX
SPAUN
AMIKO ALIEN2

Souboj Big Boxů

Největší obchodní magazin o digitální TV na světě

www.TELE-satellite.cz

The World's Largest Digital TV Trade Magazine since 1981

3DTV
HDTV
IP/Web
satellite

INTERNATIONAL 06-07-08

Company Report
GOOSAT
Mike Miao Greatly Increases Production Capacity in New Factory

Company Report
SVEC
Sung Joon Puts High Investment in High Quality

Test Report
SPAUN
BLUBOX
HEADEND
The Best in Reliability for Cable Systems

Company Report
TSREADER
Red Herring Leads the World Market in Testing Digital Streams

Company Report
DVBCN
Amiko Ali Created the Largest Digital TV Online Community in China

Test Report
AMIKO ALIEN2
2nd Generation Receiver with 3D and IP-Web-TV

Battle of the Big Boxes

Best Systems for Digital TV Cable Distribution

GLOBALINVACOM
Fiber Optic UFT System
Ready for the Future in Optical Distribution

www.TELE-satellite.com

AVAILABLE
WORLDWIDE IN
LANGUAGES
www.TELE-satellite.com

DEU
www.TELE-satellit.com

Weltweit größte Digital TV Fachzeitschrift
seit 1981

TELE

3DTV
HDTV
IP/Web
satellite

INTERNATIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAWN
BLUBOX
KOPFSTELLE

AMIKO ALIEN2

Kampf der
Großen
Boxen

Die besten Systeme für
digitale Kabelnetze

GLOBALINVACOM

Bereit für die Zukunft in Glasfaser Verteilung

www.TELE-satellit.com

Weltweit größte Digital TV
Fachzeitschrift

FRA
www.TÉLÉ-satellite.com

La plus grande magazine au monde sur le commerce de télévision numérique

TELE

3DTV
HDTV
IP/Web
satellite

INTERNATIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

TÊTE DE
RESEAU
BLUBOX
DE SPAUN

AMIKO ALIEN2

La guerre
des Big
Boxes

Meilleurs systèmes pour la distribution
de la TV numérique par câble

GLOBALINVACOM

Prêt pour le futur dans la distribution optique

www.TÉLÉ-satellite.com

Le plus grand magazine au
monde sur le commerce de
télévision numérique

MAG
www.TELE-satellite-hu.com

A Világ legnagyobb digitális tévé-kereskedelmi magazinja

TELE

3DTV
HDTV
IP/Világháló
műhold

NEMZETKÖZI 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
FOVEG

AMIKO ALIEN2

A nagy
készülékek
csatája

A legjobb rendszerek a versetőkés
digitális tévé csatlakoztatásához

GLOBALINVACOM

Felkészülve a jövőre az optikai elosztás terén

www.TELE-satellite-hu.com

A Világ legnagyobb digitális
tévé-kereskedelmi magazinja

POR
www.TELE-satélite.com

Mayor Revista do Mundo Sobre o Comércio TV Digital

TELE

3DTV
HDTV
IP/Web
satélite

INTERNACIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
HEADEND

AMIKO ALIEN2

Batalha
do Big
Boxes

Melhores sistemas de distribuição
de TV Digital por Cabo

GLOBALINVACOM

Pronto para o Futuro na Distribuição Óptica

www.TELE-satellite.com

Mayor Revista do Mundo Sobre
o Comércio TV Digital

ENG
www.TELE-satellite.com

The World's Largest Digital TV Trade Magazine

TELE

3DTV
HDTV
IP/Web
satellite

INTERNATIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
HEADEND

AMIKO ALIEN2

Battle
of the Big
Boxes

Best Systems for Digital
TV Cable Distribution

GLOBALINVACOM

Ready for the Future in Optical Distribution

www.TELE-satellite.com

The World's Largest
Digital TV Trade Magazine

HEB
www.TELE-satellite.co.il

המגזין הגדול בעולם בתחום הטלוויזיה הדיגיטלית

TELE-satellite

טל-ה-סאטלייט

06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
התחנת
הראשית

AMIKO ALIEN2

מלחמת
הקופסאות
הגדולות

הטובות ביותר למערכת
הטלוויזיה דיגיטלית

GLOBALINVACOM

מוכנים לעתיד במערכת הפצה אופטית

www.TELE-satellite.co.il

המגזין הגדול בעולם בתחום
הטלוויזיה הדיגיטלית

MAN
www.国际卫星电视.cn

有关数字电视行业的世界上发行量最大的杂志

TELE

3DTV
HDTV
IP/Web
satellite

国际 06-07-08

GOOSAT 全球国际
TSREADER
SVEC 高威克
DVBCN 数字电视中文

SPAUN
BLUBOX
国际

AMIKO ALIEN2

机顶盒
之逐鹿

最好的系统数字电视分配

GLOBALINVACOM

为未来的光分分配做好准备

www.TELE-satellite.cn

有关数字电视行业的世界上发行
量最大的杂志

ROM
www.TELE-satelit.ro

Cea mai mare revista din lume cu privire la comerțul cu tv digitale

TELE

3DTV
HDTV
IP/Web
satelit

INTERNATIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

HEAD END-UL
BLUBOX
DE LA SPAUN

AMIKO ALIEN2

Bătălia
dispozitivelor
Big Box

Cele mai bune sisteme de
distribuire de televiziune digitală

GLOBALINVACOM

Pregătit pentru viitorul distribuției optice

www.TELE-satelit.ro

Cea mai mare revista din lume cu
privire la comerțul cu tv digitale

ESP
www.TELE-satélite.es

La Revista Más Grande Del Mundo Sobre el Comercio de TV Digital

TELE

3DTV
HDTV
IP/Web
satélite

INTERNACIONAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

CABECERA
SPAUN
BLUBOX

AMIKO ALIEN2

La Batalla
de las
BigBoxes

Los Mejores Sistemas para la
Distribución de la TV Digital

GLOBALINVACOM

Listo para la Distribución Óptica del Futuro

www.TELE-satélite.es

La Revista Más Grande Del Mundo
Sobre el Comercio de TV Digital

HRV
www.TELE-satelit.eu

Najveći svjetski stručni časopis o digitalnoj TV

TELE

3DTV
HDTV
IP/Web
satelit

MEĐUNARODNI 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

GLAVNA
POSTAJA
SPAUN
BLUBOX

AMIKO ALIEN2

Bitka
velikih
kutija

Najbolji sustavi za
distribuciju kabelske TV

GLOBALINVACOM

Spremi za budućnost optičke distribucije

www.TELE-satelit.eu

Najveći svjetski stručni časopis
o digitalnoj TV

NED
www.TELE-satelliet.com

Het Grootste Vakblad ter Wereld over Digitale TV

TELE

3DTV
HDTV
IP/Web
satelliet

INTERNATIONAAL 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
HEADEND

AMIKO ALIEN2

Strijd
van de
BigBoxes

Beste systemen voor
digitale TV kabeldistributie

GLOBALINVACOM

Klaar voor de toekomst in optische distributie

www.TELE-satelliet.com

Het Grootste Vakblad ter
Wereld over Digitale TV

RUS
www.ТЕЛЕ-сателлайт.com

Крупнейший в мире журнал о бизнесе цифрового ТВ

ТЕЛЕ

3DTV
HDTV
IP/Web
сателлайт

МЕЖДУНАРОДНЫЙ 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
HEADEND

AMIKO ALIEN2

Сражение
BigBoxes

Лучшие системы для
распространения
цифрового
кабельного ТВ

GLOBALINVACOM

Готовность к кабельному будущему

www.TELE-satellayt.com

Крупнейший в мире журнал о
бизнесе цифрового ТВ

FAR
www.TELE-satellite.ir

بزرگترین مجله در جهان در مورد تجارت تلویزیون های دیجیتال

TELE

ای پی / وب
تلویزیون دیجیتال
تلویزیون کابلی

ماهواره ای

بین المللی 06-07-08

گوosat
تسریدر
اسویک
دی بی سی

اسپاون
بلوباکس
کوپرستل

امیکو آلیئن 2

نبرد
جعبه های
بزرگ

بهترین سیستم برای توزیع
تلویزیون دیجیتال

GLOBALINVACOM

آماده برای آینده در توزیع نوری

www.TELE-satellite.ir

بزرگترین مجله در جهان در
مورد تجارت تلویزیون های دیجیتال

ITA
www.TELE-satellite-italia.com

La Più Grande Rivista del Mondo Sul Commercio TV Digitale

TELE

3DTV
HDTV
IP/Web
satellite

INTERNAZIONALE 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

HEADEND
SPAUN
BLUBOX

AMIKO ALIEN2

Battaglia
dei
BigBox

Migliori Sistemi per Distribuzione
Cablata di TV Digitale

GLOBALINVACOM

Pronto per il Futuro nella Distribuzione Ottica

www.TELE-satellite-italia.com

La Più Grande Rivista del Mondo
Sul Commercio TV Digitale

POL
www.TELE-satelita.pl

Największy na świecie magazyn o cyfrowej telewizji

TELE

3DTV
HDTV
IP/Web
satelita

MIĘDZYNARODOWY 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

STACJA
CZOŁOWA
SPAUN
BLUBOX

AMIKO ALIEN2

Bitwa
wielkich
stacji

Najlepsze systemy dystry-
bucji cyfrowej TV Kablowej

GLOBALINVACOM

Gotowy do przyszłościowej dystrybucji optycznej

www.TELE-satelita.pl

Największy na świecie magazyn
o handlu cyfrowej tv

TUR
www.TELE-satellite-tr.com

Dünyanın en büyük Ticari Dijital TV Dergisi

TELE

3DTV
HDTV
IP/Internet
uydu

ULUSLARARASI 06-07-08

GOOSAT
TSREADER
SVEC
DVBCN

SPAUN
BLUBOX
HEADEND

AMIKO ALIEN2

Büyük
Kutuların
Savaşı

Dijital TV Kablo Dajışım
Sistemlerinin En İyi

GLOBALINVACOM

Optik Dağıtımda Geleceğe Hazır

www.TELE-satellite-tr.com

Dünyanın en büyük Ticari Dijital
TV Dergisi

Global Readership of *TELE-satellite Mag*



Total Readership: >350 000 W

gazine



Worldwide

Top 25 Countries > 4000 Readers

Brazil	31066
Germany	28576
United States	22229
Iran	14120
Italy	13981
UK	12658
Indonesia	10656
China	10418
Netherlands	10078
Turkey	9581
Romania	8645
Algeria	8566
France	8144
Hungary	6056
Poland	5722
India	5552
Belgium	5370
Russia	5310
Morocco	4941
Greece	4675
Czech Republic	4466
Portugal	4416
Egypt	4293
Spain	4187
Bulgaria	4016

Top 25 to 105 Countries > 175 - 4000 Readers

Canada	3931
Slovakia	3706
Saudi Arabia	3696
Ukraine	3566
Pakistan	2950
Switzerland	2939
Austria	2917
Croatia	2854
Tunisia	2746
Malaysia	2483
Sweden	2429
Iraq	2414
Israel	2234
Norway	2198
Argentina	2072
Australia	2061
Chile	1965
Serbia	1917
United Arab Emirates	1683
South Africa	1656
Ireland	1504
Denmark	1448
Thailand	1331
Venezuela	1270
Mexico	1149
Finland	1088
Philippines	1034
Colombia	998
Sri Lanka	966
Nigeria	891
Lithuania	872
Lebanon	861
Bosnia and Herzegovina	858
Jordan	848
Syria	838
South Korea	781
Yemen	746
Sudan	738
Libya	723
Macedonia	715
Kenya	605
Japan	603
Peru	592
Cyprus	589
Kuwait	560
Puerto Rico	512
Hong Kong	507
Qatar	486
Albania	475
Panama	475
Moldova	466
Latvia	464
Oman	448
Taiwan	445
Uruguay	445
Ecuador	427
New Zealand	427
Slovenia	398
Senegal	398
Paraguay	389
Luxembourg	381
Georgia	323
Mauritius	320
Ghana	318
Vietnam	307
Estonia	296
Bolivia	293
Bahrain	286
Côte d'Ivoire	280
Belarus	274
Aruba	254
Singapore	248
Bangladesh	232
Dominican Republic	224
Iceland	184
Cameroon	181
Kazakhstan	179
Barbados	178
Uganda	178

Top 106 to 180 Countries < 175 Readers

Ethiopia	163
Myanmar	158
Montenegro	154
Malta	150
Palestinian Territories	139
Netherlands Antilles	138
Trinidad and Tobago	133
Mali	128
Botswana	117
Brunei	115
Armenia	114
Zimbabwe	107
Costa Rica	106
Niger	106
Tanzania	106
Maldives	102
Malawi	101
Namibia	99
Suriname	96
Afghanistan	94
Azerbaijan	94
Mauritania	94
Madagascar	91
Zambia	85
Martinique	75
Haiti	72
Uzbekistan	70
Gambia	67
Guatemala	66
French Polynesia	66
Angola	61
New Caledonia	61
Congo	59
Honduras	59
Rwanda	58
Burkina Faso	54
French Guiana	51
Nepal	51
Guadeloupe	48
Kyrgyzstan	48
Seychelles	48
Réunion	46
Jamaica	45
Mozambique	45
Djibouti	43
Guyana	43
Cambodia	40
Benin	38
Comoros	38
Tajikistan	37
Gabon	34
Togo	32
Bermuda	29
Greenland	29
Monaco	27
El Salvador	27
Cape Verde	26
Mongolia	26
Dominica	22
Somalia	22
Burundi	21
Turkmenistan	19
Laos	16
Macau	16
Bahamas	14
Fiji	14
Papua New Guinea	14
Belize	13
Nicaragua	13
Cuba	11
Guinea	11
Isle of Man	11
British Virgin Islands	11
U.S. Virgin Islands	11

Source:

Google Analytics
as of 05-06/2012

Issue	TELE-satellite 09-10/2012	TELE-satellite 11-12/2012	TELE-satellite 01-02/2013	TELE-satellite 03-04/2013
#	1209	1211	1301	1303
Editorial Deadline	29 June 2012	31 August 2012	2 November 2012	28 December 2012
Advertisement Deadline 广告截止日期	6 July 2012	7 September 2012	9 November 2012	4 January 2013
Hardcopies	17 August 2012	19 October 2012	21 December 2012	15 February 2013
Online	31 August 2012	2 November 2012	4 January 2013	1 March 2013

Digital TV Exhibitions



7 - 11 September 2012

IBC 2012

RAI Convention Centre, Amsterdam
The Netherlands

Annual event for professionals engaged in the creation, management and delivery of entertainment and news content
Opening Hours:

7 September: 10:30am - 6:00pm

8 - 10 Sept.: 9:30am - 6:00pm

11 September: 10:30am - 4:00pm

www.ibc.org

19 - 21 September 2012

SAT-DIGI-TV

Warsaw, Poland

25 - 27 September 2012

ECEBE

Budapest, Hungary

6 - 9 October 2012

CeBIT Bilisim Eurasia

Istanbul, Turkey

13 - 16 October 2012

HKTDC Autumn

Hongkong, China

24 - 26 October 2012

CAPER 2012

Buenos Aires, Argentina

17 - 19 October 2012

EEBC 2012

Kiev, Ukraine

17 - 19 October 2012

SCTE Cable-Tec 2012

Orlando, USA



3 - 5 November 2012

SCaT India 2012

South Asia's Largest Tradeshow of the Indian Cable & Satellite Television Industry
World Trade Centre, Cuffe Parade, Mumbai, India

www.scatmag.com/scatindia/



8 - 11 January 2013

2013 International CES

Manufacturers, developers and suppliers of consumer technology hardware, content, technology delivery systems and related products and services

Las Vegas Convention Center, Las Vegas Nevada, USA

Opening Hours:

8 January: 10:00am - 6:00pm

9 - 10 Jan.: 9:00am - 6:00pm

11 January: 9:00am - 4:00pm

www.cesweb.org

16 - 18 January 2013

Convergence India 2013

New Delhi, India



7 - 9 February 2013

CSTB 2013

Key professional media event covering all the cutting-edge

formats and trends of TV and telecommunication: digital cable, satellite, free-to-air TV; IPTV; OTT TV; HDTV and 3DTV; mobile TV; TV content; multi-service networks; satellite communications, etc.

IEC "Crocus Expo", Pavilion 1
Moscow, Russia

www.cstb.ru

5 - 9 March 2013

CeBIT 2013

MesseGelände Hannover, Germany



19 - 21 March 2013

CABSAT 2013

Premier Broadcast & Satellite Platform in the ME & North Africa
Dubai International Convention and Exhibition Centre, Dubai, UAE

Opening Hours:

19 - 20 March: 10:00am - 6:00pm

21 March: 10:00am - 5:00pm

www.cabsat.com

19 - 21 March 2013

IPTV Forum

London, UK

21 - 23 March 2013

CCBN 2013

China Content Broadcasting Network Exhibition - largest broadcasting technology and equipment expo in the Asia-Pacific region

Beijing International Exhibition Center, Beijing, China

Opening Hours:

21 - 22 March: 9:00am - 5:00pm

23 March: 9:00am - 4:30pm

www.ccbn.tv

Get the *me* family...



...Get more with Less!



ALREADY ON THE MARKET
Find a Distributor near you, in our page.



TV/Radio Reception . Full HD 1080p . Media Player . EPG
Multilingual . Recording and Time Shift . DVB-API compatible
Blidsan . 4:2:2 feeds . Multiboot . Recovery Boot



 twitter.com/AZBoxHD

 facebook.com/AZBoxHD

Edifício AZBox, Lagoa, 4950-283 Mazedo MNÇ, PORTUGAL
Tel: +351 251 656 134 | info@azbox.com | www.azbox.com

WATCH THE WORLD WITH JIUZHOU

HD MPEG-4 CI+ & Nagra HD+ PVR

HD MPEG4 H.264 Compliant with DVB-S2
Support DiSEqC 1.0, 1.1, 1.2, and USALS
Support USB PVR
Support Nagra CAS, CAK7, NASC 1.4
Support APS HD +
Support HDD up to 500 G



JIUZHOU
SINCE 1958

Website: www.jiuzhou.com.cn
www.d-telemedia.com
E-mail: sales8@d-telemedia.com

Jiuzhou satisfies all your needs!



CATV Series



LNBF Series



Dish Antenna Series



Cable Series